

POWER TOOL ACCESSORIES CATALOGUE



FULL
of **POWER**



BAHCO


VERSION 1.0

1862

FULL OF PERFORMANCE



1969



In 1862, the Swede Göran Fredrik Göransson founded the companies Högbo Stål and Jernwerks AB for the purpose of producing high-quality steel. These companies formed the basis of Bahco and made us a leading global manufacturer of ergonomic tools.

By launching the first ever Bi-Metal Hand Hacksaw blade in 1969, we started a new era in cutting performance. Customers started to recognise us by the sublime quality and we became an inspiration for others.

The Bi-Metal blade set the tone for our entire range of cutting tools and also has a strong part to play in the Power Tool Accessories range, with Holesaws, Sabre Saws, Jigsaws and Band Saws – still the most powerful of their kind.

FULL OF POWER

Our many years of knowledge and experience have led to a full range of Power Tool Accessories. Over 2,000 products and growing

Thanks to this comprehensive range, professionals now only need Bahco. One strong brand on which they can build. A full range of premium-quality Power Tool Accessories to meet every need.



A FULL RANGE OF POWERFUL PRODUCTS





FULL SUPPORT

You can quickly find the right product for your application thanks to the information on the product and the new packaging.

The improved packaging line contains powerful symbols that clearly indicate the applications for which the product is designed.

On every product, Bahco has printed or engraved clear information that will save precious time for you. This may be the application or material to be cut, or the size and tothing for example. So whatever the job, you will find the right product fast!


WOOD




COARSE WOOD



WOOD



WOOD
BOARDS



LAMINATED
WOOD

METAL



ALUMINIUM




METAL STEEL



THICK METAL




TOOL STEEL



STAINLESS
STEEL



METAL SHEET



MILD STEEL



COPPER



BRASS



CAST IRON


STONE



BRICK



LECA BRICK



LIGHT BRICK

SPECIAL



WOOD & NAILS




PALLET REPAIR




PLASTER
BOARD




WALL (MC)



STEEL &
CONCRETE



TILES



GLASS



DEMOLITION



FIBREGLASS



PLASTIC



JUNKYARD



FIRE & RESCUE



MEAT & ICE





PRODUCT INDEX



HOLESAWS

10

MULTI-CONSTRUCTION SUPERIOR
HOLESAWS

BI-METAL
SANDFLEX HOLESAWS

CARBIDE TIPPED
HOLESAWS

HOLESAW ACCESSORIES

SABRE SAW BLADES

30

SABRE SAW BLADES FOR METAL

SABRE SAW BLADES
FOR WOOD & METAL

SABRE SAW BLADES FOR WOOD

SABRE SAW BLADES FOR SPECIAL
APPLICATIONS

SABRE SAW BLADES SETS

JIGSAW BLADES

48

JIGSAW BLADES FOR METAL

JIGSAW BLADES
FOR WOOD & METAL

JIGSAW BLADES FOR WOOD

CIRCULAR SAW BLADES

58

CIRCULAR SAW BLADES
FOR WOOD

CIRCULAR SAW BLADES
FOR ALUMINIUM AND PLASTIC



**PORTABLE BAND
SAW BLADES 68**

**ROTARY
BURRS 74**

**DRILL
BITS 98**

**SCREWDRIVER
BITS 122**

EASY-CUT PORTABAND

*CARBIDE
ROTARY BURRS*

*CARBIDE ROTARY BURRS
FOR ALUMINIUM*

HIGH SPEED STEEL ROTARY BURRS

*DRILL BITS FOR REINFORCED
CONCRETE*

*CHISELS FOR REINFORCED
CONCRETE*

DRILL BITS FOR WOOD

DRILL BITS FOR METAL

STEP DRILL BITS

DIAMOND SCREWDRIVER BITS

TIN TORSION SCREWDRIVER BITS

ACR TORSION SCREWDRIVER BITS

TORSION SCREWDRIVER BITS





*EXTRA HARD TORSION
SCREWDRIVER BITS*

*STAINLESS STEEL TORSION
SCREWDRIVER BITS*

ORIGINAL SCREWDRIVER BITS

*SCREWDRIVER BIT HOLDERS,
POWER NUT DRIVERS AND
ADAPTORS*

299

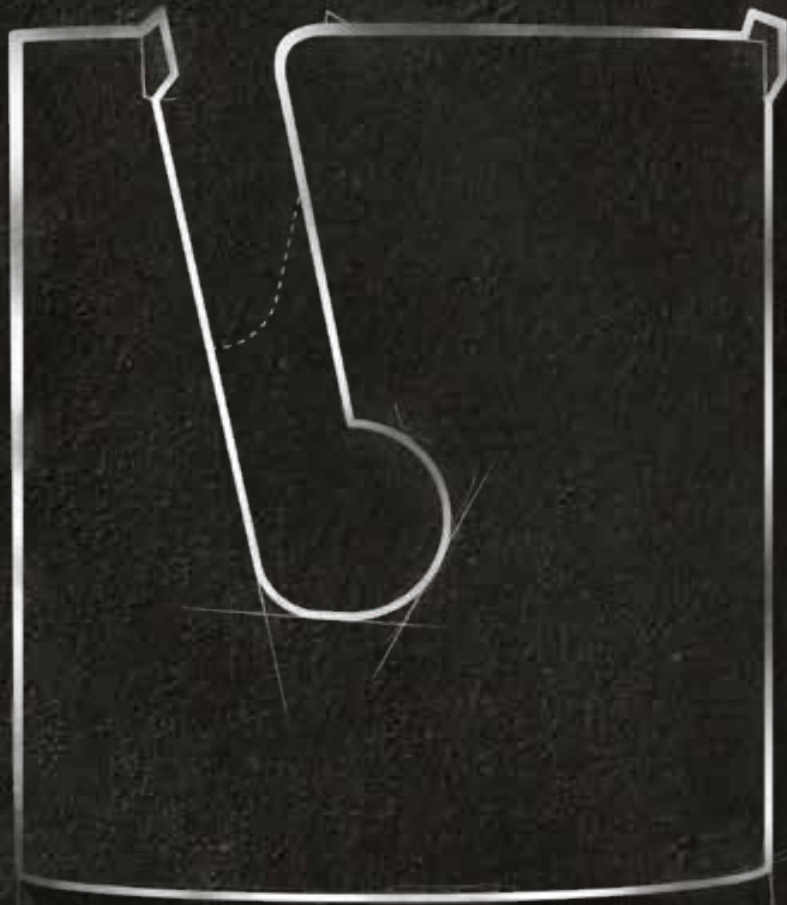




BAHCO HOLESAWS

PRODUCT INDEX

| | |
|---|----|
| <i>MULTI-CONSTRUCTION SUPERIOR HOLESAWS</i> | 16 |
| <i>BI-METAL SANDFLEX HOLESAWS</i> | 18 |
| <i>CARBIDE TIPPED HOLESAWS</i> | 22 |
| <i>QUICK-EJECT ARBOR</i> | 25 |


299
PRODUCTS

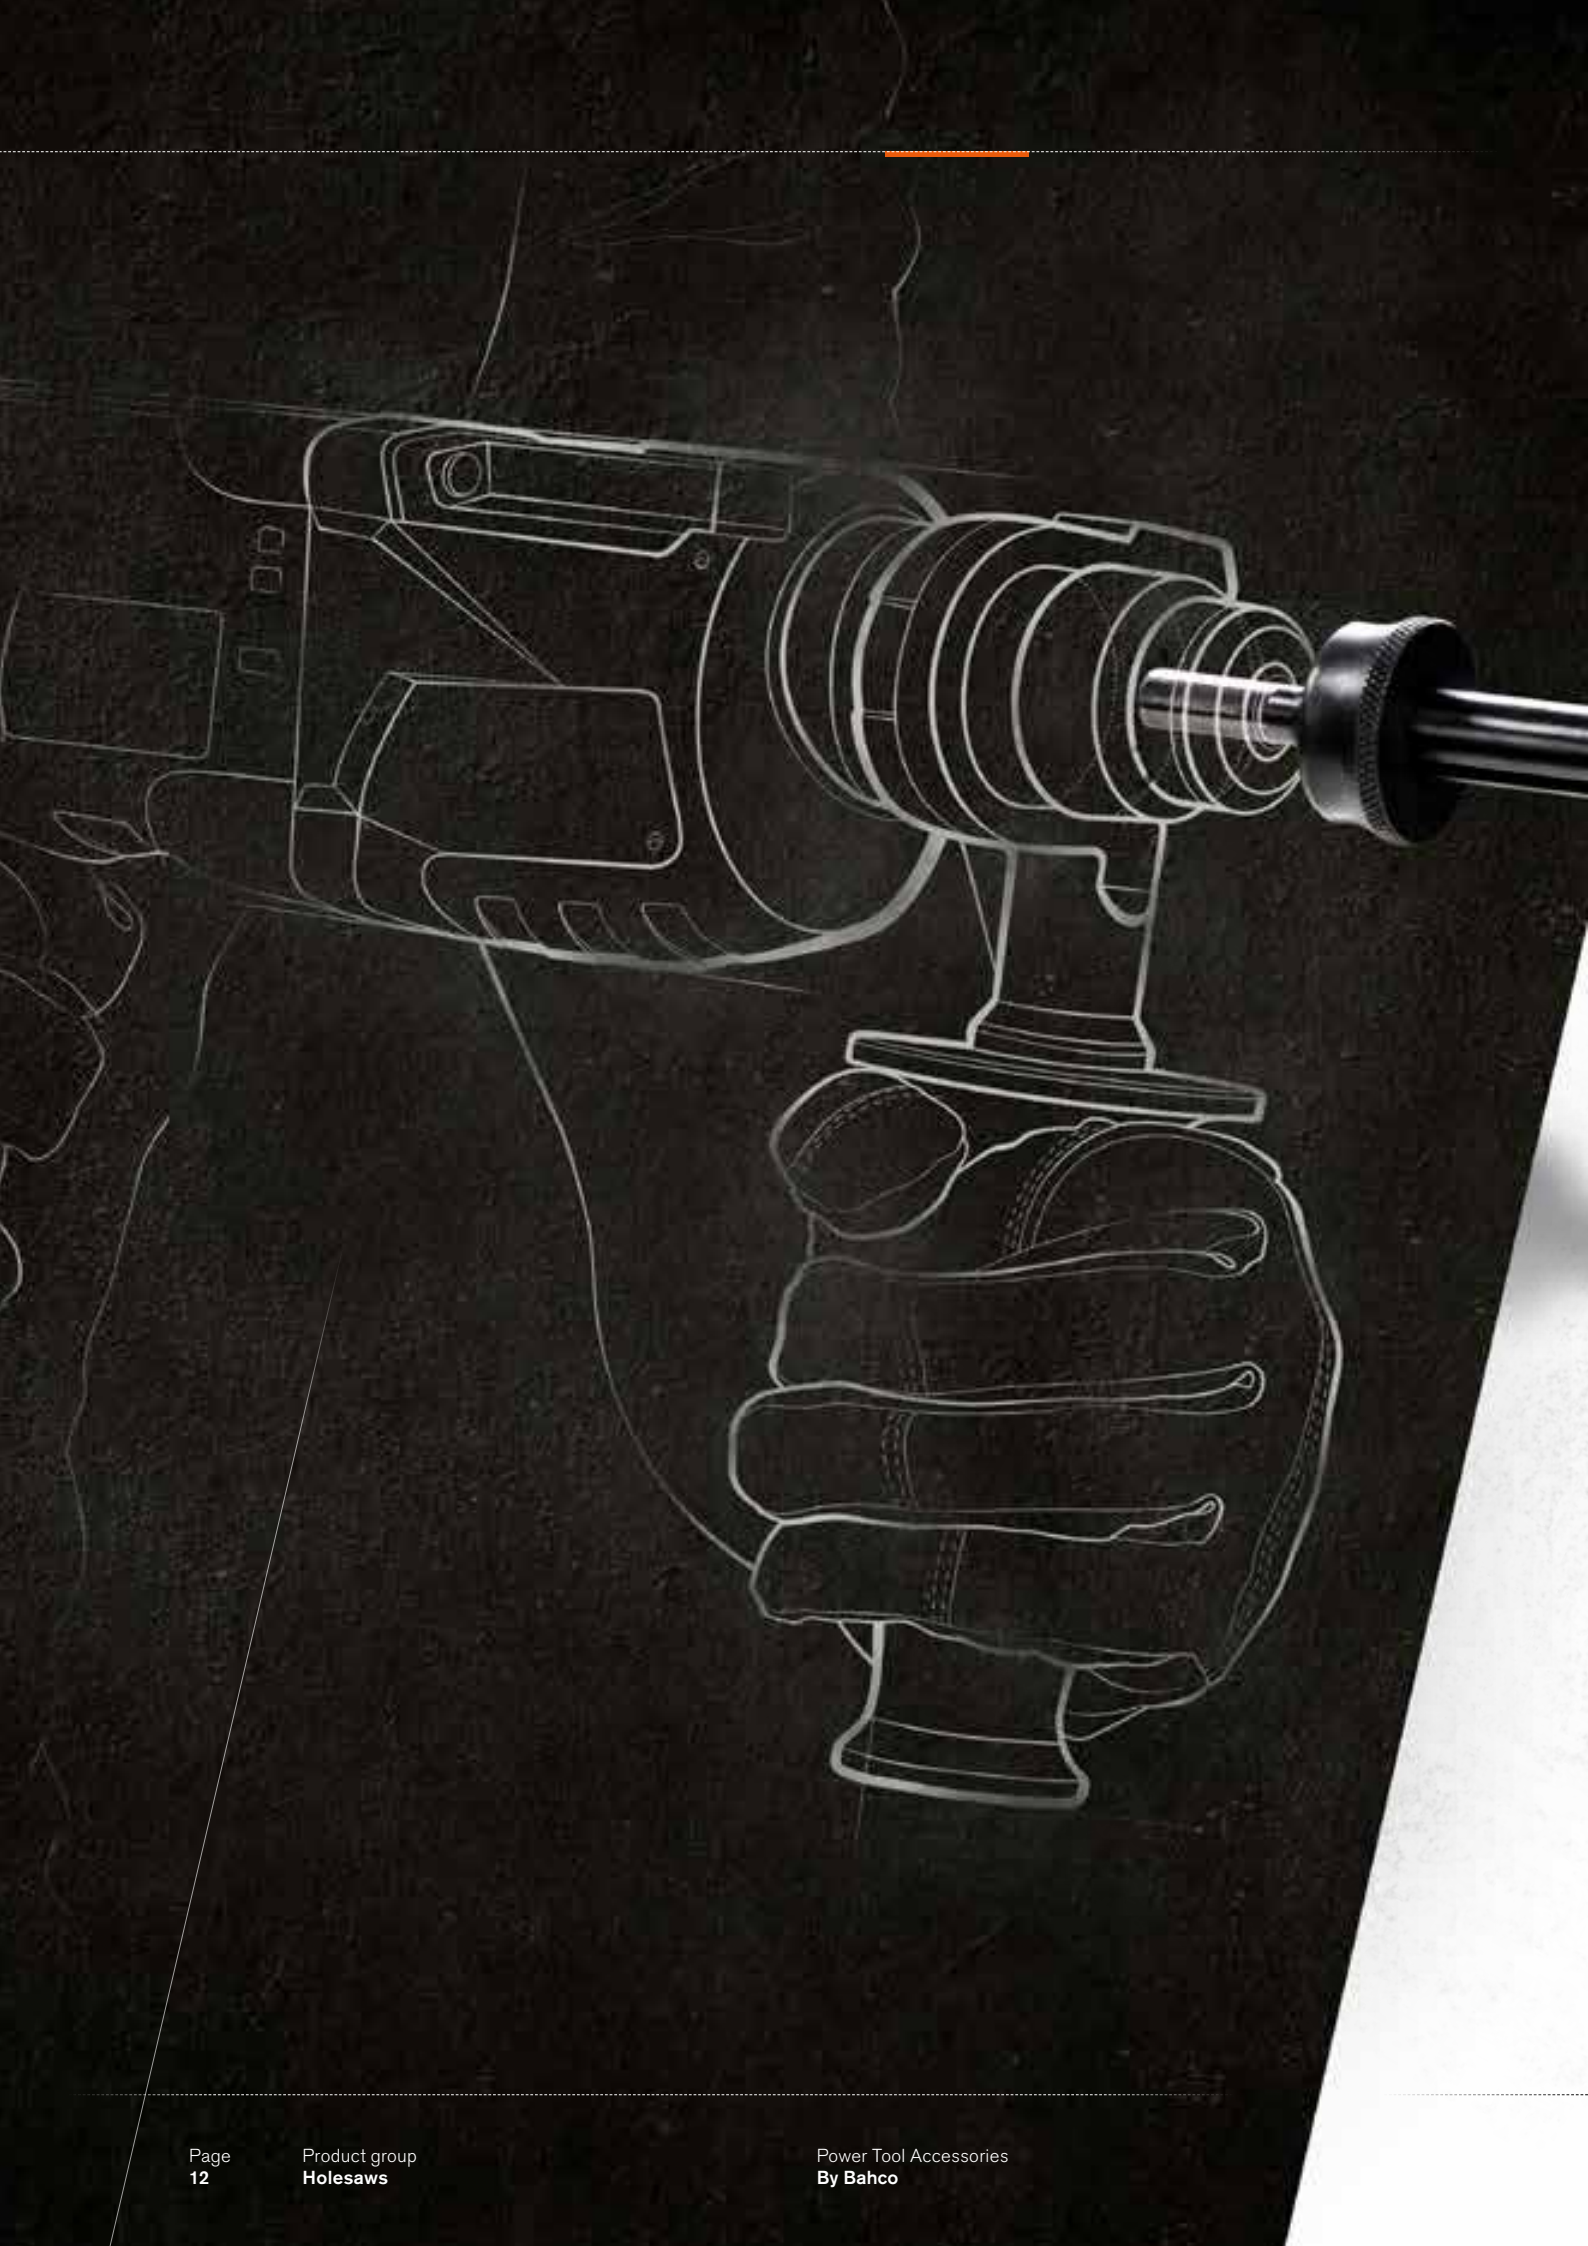


TIME-SAVING TOOLS **WITH CUTTING-EDGE** **PERFORMANCE**



**QUICK-EJECT ARBOR FOR
FAST AND EASY CORE REMOVAL**



**CUTTING HOLES
AT AN ANGLE**



**UPSIZE ADAPTOR FOR
ENLARGING EXISTING HOLES**

299

FULL OF POWER

Bahco Holesaws set the standard in precision, quality, durability and versatility. Whatever the job, you will find the Holesaws and accessories you need.

Each part of the Holesaw is designed to boost productivity and craftsmanship, from the design of the cutting edges to the technologies used in production. There is consistent quality and total control from making the Bi-Metal all the way to the finished Holesaw. In our own R&D department, we test and develop innovations to ensure that we stay ahead of the market. Our wide range of Holesaws and accessories will meet your needs for almost any material. They are compatible with all machine brands.

COMPLETE HOLESAW SYSTEM

Looking for maximum performance and flexibility? Bahco's line of arbors, extensions, pilot drills, ejector springs and adaptors are designed as a fully interchangeable system.

FULL SUPPORT

CUTTING SPEED RECOMMENDATIONS

To get maximum result out of each Holesaw, we recommend the following cutting speeds (RPM).



FE



18/8



Cast iron



CuZn



Alu



Wood

| | FE | 18/8 | Cast iron | CuZn | Alu | Wood |
|--------------------|---------|---------|-----------|---------|---------|-----------|
| 14-19 mm: | 580-460 | 300-240 | 400-300 | 790-600 | 900-690 | 3000 |
| 20-30 mm: | 435-285 | 230-145 | 290-190 | 580-380 | 660-425 | 3000-2400 |
| 32-48 mm: | 275-180 | 140-90 | 180-120 | 360-240 | 410-270 | 2400-2100 |
| 51-76 mm: | 170-115 | 85-55 | 115-75 | 230-150 | 255-170 | 2000-1500 |
| 79-105 mm: | 110-80 | 55-40 | 70-55 | 140-110 | 165-120 | 1500-1000 |
| 108-152 mm: | 80-55 | 40-25 | 55-35 | 110-75 | 120-75 | 900-800 |
| 168-210 mm: | 50-40 | 25-20 | 35-25 | 70-55 | 75-60 | 700-500 |

CARBIDE TIPPED HOLESAW



Fibreglass



Laminate



Brick



Tiles

| | Fibreglass | Laminate | Brick | Tiles |
|--------------------|------------|-----------|-----------|---------|
| 14-19 mm: | 2380-1790 | 1360-1020 | 1705-1280 | 680-510 |
| 20-30 mm: | 1700-1130 | 970-640 | 1210-810 | 480-320 |
| 32-48 mm: | 1070-710 | 610-410 | 770-510 | 310-205 |
| 51-76 mm: | 670-450 | 380-260 | 480-320 | 190-130 |
| 79-105 mm: | 430-320 | 250-185 | 310-235 | 125-92 |
| 108-152 mm: | 310-220 | 180-130 | 230-160 | 90-65 |



FULL RANGE

299
PRODUCTS

| | MULTI-CONSTRUCTION SUPERIOR HOLESAWS | BI-METAL SANDFLEX HOLESAWS | CARBIDE TIPPED HOLESAW |
|--|--|---|--|
| Range |  19-225 mm |  14-210 mm |  14-152 mm |
| Application |  |  |  |
| Sets | ✓ | ✓ | |
| Quick-Eject Arbors | 3834-ARBR-930EL 3834-ARBR-9100EL | 3834-ARBR-930ESM 3834-ARBR-9100ESM | 3834-ARBR-930ES 3834-ARBR-9100ES |
| Standard Arbors | 3834-ARBR-630 3834-ARBR-730 3834-ARBR-930 3834-ARBR-1130 | | |
| Quick Change Arbors | 3834-ARBR-9100QC 3834-ARBR-11152QC 3834-ARBR-16152QC | | |
| Power Driver™ Arbors | 3834-ARBR-9100 3834-ARBR-11152 3834-ARBR-16152 | | |
| Arbors with SDS+ shank | 3834-ARBR-SD30 3834-ARBR-SD152QC | | |
| Pilot Drills Quick-Eject Arbors | 3834-DRL-EL | 3834-DRL-EL | 3834-DRL-ES |
| Pilot Drills Standard Arbors | 3834-DRL-L | 3834-DRL | 3834-DRL-CT |
| Upsize Adaptor | 3834-UPSIZE | | |
| Ejector Spring | 3834-ES | | |
| Arbor Adaptor | 3834-ADP | | |
| Arbor Extensions | 3834-EXT | | |

ARBOR SELECTION DEPENDS ON THE SIZE OF THE HOLESAW. LOOK FOR THE OVERVIEW ON PAGE 24

MULTI-CONSTRUCTION SUPERIOR HOLESAWS



66 PRODUCTS



**GO STRAIGHT THROUGH
A WALL IN ONE GO!**

PERMANENT LASER MARKING
OF THE SIZE IN MILLIMETRES
AND INCHES



WIDE GULLETS FOR FAST
AND EFFECTIVE CHIP REMOVAL

SPECIAL COATING MINIMISES
HEAT AND FRICTION

INSTANT PENETRATION
THANKS TO PRECISION
TOOTH GEOMETRY

SIMPLE HOLESAW SELECTION
THANKS TO THE PRINTED
MATERIAL INFORMATION

CUTTING DEPTH OF 71MM!

3833

MULTI-CONSTRUCTION SUPERIOR HOLESAWS



FEATURES:

- Premium Carbide tipped holesaws with deep gullets for effective chip removal and fast cutting
- Works excellently on wood, wood with nails, bricks, MDF, plaster board, veneer and plastics etc.
- Extra-deep cutting, 71mm when cutting through a wall
- Permanent laser marking to ensure that you always find the size you need

- Exceptional to use in combination with our Quick-Eject arbors (3834-ARBR-930EL/-9100EL)
- Max. hole size = nominal holesaw size +1.5 mm./- 0.0
- Holesaws up to 159mm are packaged in retail packing with tooth protectors
- Holesaws above 159mm are packaged in cardboard boxes

ASSORTMENT:

| 3833-19-C | 7314150263561 | 1 | 1 | 19 | 60 |
|-----------|---------------|---|---|----|-----|
| 3833-20-C | 7314150263578 | 1 | 1 | 20 | 60 |
| 3833-22-C | 7314150263585 | 1 | 1 | 22 | 70 |
| 3833-25-C | 7314150263592 | 1 | 1 | 25 | 90 |
| 3833-27-C | 7314150263608 | 1 | 1 | 27 | 100 |

| 3833-29-C | 7314150263615 | 1 | 1 | 29 | 110 |
|-----------|---------------|---|---|----|-----|
| 3833-30-C | 7314150263622 | 1 | 1 | 30 | 120 |
| 3833-32-C | 7314150263639 | 1 | 1 | 32 | 120 |
| 3833-35-C | 7314150263646 | 1 | 1 | 35 | 140 |
| 3833-38-C | 7314150263653 | 1 | 1 | 38 | 160 |

| 3833-40-C | 7314150263660 | 1 | 1 | 40 | 140 |
|-----------|---------------|---|---|----|-----|
| 3833-41-C | 7314150263677 | 1 | 1 | 41 | 150 |
| 3833-44-C | 7314150263684 | 1 | 1 | 44 | 160 |
| 3833-48-C | 7314150263691 | 1 | 1 | 48 | 190 |
| 3833-51-C | 7314150263707 | 1 | 1 | 51 | 200 |
| 3833-54-C | 7314150263714 | 1 | 1 | 54 | 220 |
| 3833-56-C | 7314150314676 | 1 | 1 | 56 | 260 |
| 3833-57-C | 7314150263721 | 1 | 1 | 57 | 240 |
| 3833-60-C | 7314150263738 | 1 | 1 | 60 | 260 |
| 3833-62-C | 7314150314683 | 1 | 1 | 62 | 280 |
| 3833-64-C | 7314150263745 | 1 | 1 | 64 | 280 |
| 3833-65-C | 7314150263752 | 1 | 1 | 65 | 290 |
| 3833-67-C | 7314150263769 | 1 | 1 | 67 | 300 |
| 3833-68-C | 7314150263776 | 1 | 1 | 68 | 310 |
| 3833-70-C | 7314150263783 | 1 | 1 | 70 | 320 |
| 3833-71-C | 7314150314690 | 1 | 1 | 71 | 340 |
| 3833-73-C | 7314150263790 | 1 | 1 | 73 | 340 |
| 3833-74-C | 7314150314706 | 1 | 1 | 74 | 355 |
| 3833-76-C | 7314150263806 | 1 | 1 | 76 | 370 |
| 3833-77-C | 7314150263813 | 1 | 1 | 77 | 370 |
| 3833-78-C | 7314150314713 | 1 | 1 | 78 | 400 |
| 3833-79-C | 7314150263820 | 1 | 1 | 79 | 420 |

| 3833-83-C | 7314150263837 | 1 | 1 | 83 | 420 |
|------------|---------------|---|---|-----|------|
| 3833-86-C | 7314150263844 | 1 | 1 | 86 | 440 |
| 3833-89-C | 7314150263851 | 1 | 1 | 89 | 470 |
| 3833-92-C | 7314150263868 | 1 | 1 | 92 | 490 |
| 3833-95-C | 7314150263875 | 1 | 1 | 95 | 520 |
| 3833-98-C | 7314150263882 | 1 | 1 | 98 | 540 |
| 3833-102-C | 7314150263899 | 1 | 1 | 102 | 580 |
| 3833-105-C | 7314150263905 | 1 | 1 | 105 | 600 |
| 3833-108-C | 7314150263912 | 1 | 1 | 108 | 630 |
| 3833-109-C | 7314150263929 | 1 | 1 | 109 | 640 |
| 3833-111-C | 7314150263936 | 1 | 1 | 111 | 660 |
| 3833-114-C | 7314150263943 | 1 | 1 | 114 | 690 |
| 3833-121-C | 7314150263950 | 1 | 1 | 121 | 760 |
| 3833-127-C | 7314150263967 | 1 | 1 | 127 | 820 |
| 3833-133-C | 7314150401581 | 1 | 1 | 133 | 880 |
| 3833-140-C | 7314150263974 | 1 | 1 | 140 | 960 |
| 3833-152-C | 7314150263981 | 1 | 1 | 152 | 1100 |
| 3833-159-C | 7314150263998 | 1 | 1 | 159 | 1180 |
| 3833-168 | 7314150413546 | 1 | 1 | 168 | 1350 |
| 3833-177 | 7314150413539 | 1 | 1 | 177 | 1400 |
| 3833-210 | 7314150413522 | 1 | 1 | 210 | 1870 |
| 3833-225 | 7314150413515 | 1 | 1 | 225 | 2070 |

3833-SET

MULTI-CONSTRUCTION SUPERIOR HOLESAW SETS



FEATURES:

- Superior™ holesaw sets consisting of the most popular sizes for Carpenters, Plumbers and Electricians. Sets also include the Quick-Eject arbor.

ASSORTMENT:

| 3833-SET-101 | 7314150315383 | 19, 22, 29, 35, 44, 51, 64 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL | 1 | 2750 |
|--------------|---------------|--|-----------------|------------------|--------------------------|---|------|
| 3833-SET-201 | 7314150315406 | 19, 20, 25, 32, 41, 51, 73, 76, 83, 86 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 4350 |
| 3833-SET-202 | 7314150315420 | 19, 20, 25, 32, 41, 51, 57, 60, 73, 83 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 4100 |
| 3833-SET-203 | 7314150315444 | 19, 22, 54, 56, 57, 62, 68, 71, 74, 78 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 4650 |
| 3833-SET-204 | 7314150315468 | 32, 41, 51, 73, 76, 83, 86 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 3880 |
| 3833-SET-205 | 7314150330874 | 22, 35, 44, 51, 67 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 2810 |
| 3833-SET-207 | 7314150330898 | 19, 22, 25, 35, 44, 51, 64, 67, 76, 83 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 3900 |
| 3833-SET-208 | 7314150330904 | 19, 22, 25, 32, 35, 38, 44, 51, 57, 68, 76 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 3720 |
| 3833-SET-301 | 7314150315376 | 25, 32, 35, 51, 54, 76, 92, 114 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 4380 |
| 3833-SET-302 | 7314150315390 | 51, 76, 86, 111 | | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 3510 |
| 3833-SET-303 | 7314150315413 | 35, 40, 51, 57, 60, 74, 83, 105 | | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 4170 |
| 3833-SET-304 | 7314150315437 | 19, 25, 32, 35, 51, 54, 76, 92, 114 | 3834-ARBR-930EL | 3834-ARBR-9100EL | 3834-DRL-EL, 3834-UPSIZE | 1 | 4200 |

BI-METAL SANDFLEX HOLESAWS



136 PRODUCTS



RESEARCHED, DEVELOPED
AND MANUFACTURED BI-METAL
HOLESAWS BY BAHCO



SHATTERPROOF BI-METAL BODY
FOR MORE SAFETY

MADE WITH 8% COBALT TO ENSURE
A LONGER HOLESAW LIFE

RANGE 14-152 MM HAS
A 6-DEGREE POSITIVE
TOOTH ANGLE FOR
AGGRESSIVE CUTTING

RANGE 168-210 MM HAS
A 0-DEGREE TOOTH ANGLE
TO SIMPLIFY CUTTING

SIMPLE HOLESAW SELECTION
THANKS TO THE PRINTED
MATERIAL INFORMATION

3830

BI-METAL SANDFLEX HOLESAWS



FEATURES:







- Bi-Metal Sandflex® hole saws are specially designed for cutting metal but can be used with most materials, such as wood and plastics
- The hole saw cuts through ferrous metals (steel, stainless steel, cast iron) and non-ferrous metals (aluminium, brass, copper)
- Cutting depth max 38mm (1 1/2")
- Bi-metal construction with 8% cobalt for increased wear resistance
- 4/6 teeth per inch
- Max. hole size = nominal hole saw size +1.5mm./- 0.0
- Extra large sizes: 168 and 210mm with 6 teeth per inch, normal cutting depth 177mm with 4/6 teeth per inch, cutting depth max. 50mm







ASSORTMENT (-C):

All -C hole saws are packed in a retail package with tooth protector

| 3830-14-C | 7311518228347 | 1 | 1 | 14 | 30 | | |
|-----------|---------------|---|---|----|----|--|--|
| 3830-16-C | 7311518225353 | 1 | 1 | 16 | 35 | | |
| 3830-17-C | 7311518228354 | 1 | 1 | 17 | 40 | | |
| 3830-19-C | 7311518225360 | 1 | 1 | 19 | 43 | | |
| 3830-20-C | 7311518225377 | 1 | 1 | 20 | 45 | | |







| 3830-21-C | 7311518228361 | 1 | 1 | 21 | 50 | | |
|-----------|---------------|---|---|----|----|--|--|
| 3830-22-C | 7311518225384 | 1 | 1 | 22 | 52 | | |
| 3830-24-C | 7311518228378 | 1 | 1 | 24 | 55 | | |
| 3830-25-C | 7311518225391 | 1 | 1 | 25 | 58 | | |
| 3830-27-C | 7311518225407 | 1 | 1 | 27 | 60 | | |







|  |  |  |  |  |  |
|---|---|---|---|---|---|
| 3830-29-C | 7311518225414 | 1 | 1 | 29 | 65 |
| 3830-30-C | 7311518225421 | 1 | 1 | 30 | 65 |
| 3830-32-C | 7311518225438 | 1 | 1 | 32 | 70 |
| 3830-33-C | 7311518228385 | 1 | 1 | 33 | 75 |
| 3830-35-C | 7311518225445 | 1 | 1 | 35 | 75 |
| 3830-37-C | 7311518228392 | 1 | 1 | 37 | 80 |
| 3830-38-C | 7311518225452 | 1 | 1 | 38 | 85 |
| 3830-40-C | 7311518228408 | 1 | 1 | 40 | 90 |
| 3830-41-C | 7311518225469 | 1 | 1 | 41 | 93 |
| 3830-43-C | 7311518228415 | 1 | 1 | 43 | 100 |
| 3830-44-C | 7311518225476 | 1 | 1 | 44 | 100 |
| 3830-46-C | 7311518228422 | 1 | 1 | 46 | 115 |
| 3830-48-C | 7311518225483 | 1 | 1 | 48 | 120 |
| 3830-50-C | 7311518260873 | 1 | 1 | 50 | 130 |
| 3830-51-C | 7311518225490 | 1 | 1 | 51 | 135 |
| 3830-52-C | 7311518228439 | 1 | 1 | 52 | 140 |
| 3830-54-C | 7311518225506 | 1 | 1 | 54 | 150 |
| 3830-55-C | 7311518270919 | 1 | 1 | 55 | 155 |
| 3830-56-C | 7311518228446 | 1 | 1 | 56 | 160 |
| 3830-57-C | 7311518225513 | 1 | 1 | 57 | 165 |
| 3830-59-C | 7311518228453 | 1 | 1 | 59 | 170 |
| 3830-60-C | 7311518225520 | 1 | 1 | 60 | 177 |
| 3830-64-C | 7311518225537 | 1 | 1 | 64 | 200 |
| 3830-65-C | 7311518228460 | 1 | 1 | 65 | 205 |

|  |  |  |  |  |  |
|---|--|---|---|---|---|
| 3830-67-C | 7311518225544 | 1 | 1 | 67 | 215 |
| 3830-68-C | 7311518228477 | 1 | 1 | 68 | 220 |
| 3830-70-C | 7311518225551 | 1 | 1 | 70 | 230 |
| 3830-73-C | 7311518228484 | 1 | 1 | 73 | 245 |
| 3830-76-C | 7311518225568 | 1 | 1 | 76 | 260 |
| 3830-79-C | 7311518228491 | 1 | 1 | 79 | 270 |
| 3830-83-C | 7311518225575 | 1 | 1 | 83 | 305 |
| 3830-86-C | 7311518228507 | 1 | 1 | 86 | 325 |
| 3830-89-C | 7311518225582 | 1 | 1 | 89 | 345 |
| 3830-92-C | 7311518225599 | 1 | 1 | 92 | 355 |
| 3830-95-C | 7311518225605 | 1 | 1 | 95 | 385 |
| 3830-98-C | 7311518228514 | 1 | 1 | 98 | 400 |
| 3830-102-C | 7311518225612 | 1 | 1 | 102 | 425 |
| 3830-105-C | 7311518225629 | 1 | 1 | 105 | 445 |
| 3830-108-C | 7311518228521 | 1 | 1 | 108 | 475 |
| 3830-111-C | 7311518228538 | 1 | 1 | 111 | 500 |
| 3830-114-C | 7311518225636 | 1 | 1 | 114 | 540 |
| 3830-121-C | 7311518225643 | 1 | 1 | 121 | 590 |
| 3830-127-C | 7311518225650 | 1 | 1 | 127 | 645 |
| 3830-133-C | 7311518228545 | 1 | 1 | 133 | 720 |
| 3830-140-C | 7311518228552 | 1 | 1 | 140 | 770 |
| 3830-146-C | 7311518228569 | 1 | 1 | 146 | 815 |
| 3830-152-C | 7311518225667 | 1 | 1 | 152 | 885 |

ASSORTMENT (-VIP):

All -VIP holesaws are packed in a cardboard box with an instruction leaflet enclosed

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| 3830-14-VIP | 7311518041618 | 1 | 6 | 14 | 30 |
| 3830-16-VIP | 7311518041625 | 1 | 6 | 16 | 35 |
| 3830-17-VIP | 7311518041632 | 1 | 6 | 17 | 40 |
| 3830-19-VIP | 7311518041649 | 1 | 6 | 19 | 43 |
| 3830-20-VIP | 7311518041656 | 1 | 6 | 20 | 45 |
| 3830-21-VIP | 7311518041663 | 1 | 6 | 21 | 50 |
| 3830-22-VIP | 7311518041670 | 1 | 6 | 22 | 52 |
| 3830-24-VIP | 7311518041687 | 1 | 6 | 24 | 55 |
| 3830-25-VIP | 7311518041694 | 1 | 6 | 25 | 58 |
| 3830-27-VIP | 7311518041700 | 1 | 6 | 27 | 60 |
| 3830-29-VIP | 7311518041717 | 1 | 6 | 29 | 65 |
| 3830-30-VIP | 7311518041724 | 1 | 6 | 30 | 65 |
| 3830-32-VIP | 7311518041731 | 1 | 6 | 32 | 70 |
| 3830-33-VIP | 7311518041748 | 1 | 6 | 33 | 75 |
| 3830-35-VIP | 7311518041755 | 1 | 6 | 35 | 75 |
| 3830-37-VIP | 7311518041762 | 1 | 6 | 37 | 80 |
| 3830-38-VIP | 7311518041779 | 1 | 6 | 38 | 85 |
| 3830-40-VIP | 7311518041786 | 1 | 6 | 40 | 90 |
| 3830-41-VIP | 7311518041793 | 1 | 6 | 41 | 93 |
| 3830-43-VIP | 7311518041809 | 1 | 6 | 43 | 100 |
| 3830-44-VIP | 7311518041816 | 1 | 6 | 44 | 100 |
| 3830-46-VIP | 7311518041823 | 1 | 6 | 46 | 115 |
| 3830-48-VIP | 7311518041830 | 1 | 6 | 48 | 120 |
| 3830-50-VIP | 7311518260866 | 1 | 6 | 50 | 130 |
| 3830-51-VIP | 7311518041847 | 1 | 6 | 51 | 135 |
| 3830-52-VIP | 7311518041854 | 1 | 4 | 52 | 140 |
| 3830-54-VIP | 7311518041861 | 1 | 4 | 54 | 150 |
| 3830-55-VIP | 7311518270902 | 1 | 4 | 55 | 155 |
| 3830-56-VIP | 7311518152703 | 1 | 4 | 56 | 160 |
| 3830-57-VIP | 7311518041878 | 1 | 4 | 57 | 165 |
| 3830-59-VIP | 7311518041885 | 1 | 4 | 59 | 170 |

|  |  |  |  |  |  |
|---|--|---|---|---|---|
| 3830-60-VIP | 7311518041892 | 1 | 4 | 60 | 177 |
| 3830-62-VIP | 7311518234645 | 1 | 4 | 62 | 190 |
| 3830-64-VIP | 7311518041908 | 1 | 4 | 64 | 200 |
| 3830-65-VIP | 7311518041915 | 1 | 4 | 65 | 205 |
| 3830-67-VIP | 7311518041922 | 1 | 4 | 67 | 215 |
| 3830-68-VIP | 7311518196530 | 1 | 4 | 68 | 220 |
| 3830-70-VIP | 7311518041939 | 1 | 4 | 70 | 245 |
| 3830-73-VIP | 7311518041946 | 1 | 4 | 73 | 270 |
| 3830-76-VIP | 7311518041953 | 1 | 4 | 76 | 285 |
| 3830-79-VIP | 7311518041960 | 1 | 4 | 79 | 295 |
| 3830-83-VIP | 7311518041977 | 1 | 4 | 83 | 330 |
| 3830-86-VIP | 7311518041984 | 1 | 4 | 86 | 350 |
| 3830-89-VIP | 7311518041991 | 1 | 4 | 89 | 370 |
| 3830-92-VIP | 7311518042004 | 1 | 4 | 92 | 380 |
| 3830-95-VIP | 7311518042011 | 1 | 4 | 95 | 410 |
| 3830-98-VIP | 7311518042028 | 1 | 4 | 98 | 430 |
| 3830-102-VIP | 7311518042035 | 1 | 4 | 102 | 455 |
| 3830-105-VIP | 7311518042042 | 1 | 4 | 105 | 475 |
| 3830-108-VIP | 7311518042059 | 1 | 4 | 108 | 505 |
| 3830-111-VIP | 7311518042066 | 1 | 4 | 111 | 530 |
| 3830-114-VIP | 7311518042073 | 1 | 4 | 114 | 570 |
| 3830-121-VIP | 7311518042080 | 1 | 1 | 121 | 635 |
| 3830-127-VIP | 7311518042097 | 1 | 1 | 127 | 690 |
| 3830-133-VIP | 7311518042103 | 1 | 1 | 133 | 765 |
| 3830-140-VIP | 7311518042110 | 1 | 1 | 140 | 815 |
| 3830-146-VIP | 7311518042127 | 1 | 1 | 146 | 860 |
| 3830-152-VIP | 7311518042134 | 1 | 1 | 152 | 930 |
| 3830-168 | 7311518040659 | 1 | 1 | 168 | 1315 |
| 3830-177-HIGH | 7311518101329 | 1 | 1 | 177 | 1570 |
| 3830-210 | 7311518040666 | 1 | 1 | 210 | 1900 |

3834-SET**BI-METAL SANDFLEX HOLESAW SETS****FEATURES:**

- Bi-metal Sandflex® holesaw sets consisting of popular sizes within the engineering industry, water and sanitation industries and the electric installation industry

ASSORTMENT:

| 3834-SET-42 | 7311518241988 | 51, 76, 86, 111 | | | 3834-ARBR-9100 | | 3834-ES | 1 | 2025 |
|-------------------|---------------|--|--|----------------|------------------|-------------|----------|---|------|
| 3834-SET-53 | 7314150127153 | 19, 22, 25, 29, 30, 35, 37, 41, 52, 60, 79 | | 3834-ARBR-930 | 3834-ARBR-9100 | | | 1 | 2370 |
| 3834-SET-61 | 7311518266431 | 44, 51, 57, 73, 86, 114 | | | 3834-ARBR-9100 | | | 1 | 3145 |
| 3834-SET-62 | 7311518228040 | 19, 21, 22, 29, 38, 48 | | 3834-ARBR-930 | 3834-ARBR-9100 | | BRUSH | 1 | 1050 |
| 3834-SET-62-16/50 | 7311518258887 | 16, 20, 25, 32, 40, 50 | | 3834-ARBR-930 | 3834-ARBR-9100 | | BRUSH | 1 | 1065 |
| 3834-SET-65-16/51 | 7311518159900 | 16, 20, 25, 32, 40, 51 | | 3834-ARBR-1130 | 3834-ARBR-11152 | 3834-DRL | BRUSH | 1 | 1465 |
| 3834-SET-65-22/64 | 7311518159917 | 22, 29, 35, 44, 51, 64 | | 3834-ARBR-1130 | 3834-ARBR-11152 | 3834-DRL | | 1 | 1625 |
| 3834-SET-72 | 7311518044992 | 19, 22, 29, 35, 44, 51, 64 | | 3834-ARBR-930 | 3834-ARBR-9100 | | | 1 | 1080 |
| 3834-SET-73 | 7311518254339 | 16, 22, 51, 57, 73, 76, 92 | | 3834-ARBR-930 | 3834-ARBR-9100 | | | 1 | 2080 |
| 3834-SET-73-22/68 | 7314150134809 | 22, 29, 35, 44, 51, 64, 68 | | 3834-ARBR-1130 | 3834-ARBR-11152 | 3834-DRL | | 1 | 2170 |
| 3834-SET-77 | 7314150235919 | 16, 20, 25, 32, 41, 51, 73, 76, 83, 86 | | 3834-ARBR-930 | 3834-ARBR-9100 | 3834-DRL | | 1 | 3325 |
| 3834-SET-86 | 7311518224295 | 25, 32, 35, 51, 54, 76, 92, 114 | | 3834-ARBR-1130 | 3834-ARBR-11152 | 2x 3834-DRL | 3834-ADP | 1 | 2540 |
| 3834-SET-87 | 7311518181772 | 19, 22, 29, 38, 43, 48, 52, 65 | | 3834-ARBR-930 | 3834-ARBR-9100 | 3834-DRL | 3834-ES | 1 | 1925 |
| 3834-SET-92 | 7311518044985 | 16, 22, 25, 29, 32, 41, 51, 73, 83 | | 3834-ARBR-930 | 3834-ARBR-9100 | | | 1 | 1440 |
| 3834-SET-93 | 7314150414741 | 16, 20, 25, 32, 40, 51, 67, 76, 83 | | 3834-ARBR-930 | 3834-ARBR-9100QC | 3834-DRL | | 1 | 2000 |
| 3834-SET-94 | 7311518166458 | 16, 19, 22, 25, 30, 35, 41, 51, 67 | | 3834-ARBR-1130 | 3834-ARBR-11152 | | | 1 | 1815 |
| 3834-SET-95 | 7311518159894 | 16, 19, 22, 29, 35, 44, 52, 57, 64 | | 3834-ARBR-1130 | 3834-ARBR-11152 | 3834-DRL | | 1 | 1350 |
| 3834-SET-103 | 7314150134908 | 16, 19, 24, 29, 38, 44, 57, 67 | | 3834-ARBR-1130 | 3834-ARBR-11152 | 3834-DRL | | 1 | 2015 |
| 3834-SET-152 | 7314150255658 | 16, 19, 22, 25, 32, 35, 44, 51, 57, 60, 65, 68, 73, 76, 83 | | 3834-ARBR-930 | 3834-ARBR-9100 | 2x 3834-DRL | | 1 | 3770 |

APPLICATION:

Metal sheet

PRODUCTS:

Sandflex® Bi-Metal Holesaw
Quick-Eject Arbor
HSS Pilot Drill



CARBIDE TIPPED HOLESAWS



55 PRODUCTS



HIGHLY WEAR RESISTANT!

IDEAL FOR MAKING HIGH-PRECISION HOLES IN HARD MATERIAL SUCH AS CERAMIC TILES, STONE, FIBREGLASS, LAMINATE AND HARDWOOD

EASILY CUTS THROUGH ABRASIVE MATERIAL, SUCH AS CONCRETE AND BRICK

PRECISION-GROUND CARBIDE TIPPED TEETH AT A 6-DEGREE POSITIVE TOOTH ANGLE

SIMPLE HOLESAW SELECTION THANKS TO THE PRINTED MATERIAL INFORMATION



3832

CARBIDE TIPPED HOLESAWS



FEATURES:







- Carbide tipped holesaws work well with everything from bricks and ceramic tiles, laminate, fibreglass and hardwood as well as difficult-to-cut steel applications
- Fit all power drills, both stationary and portable
- Knockout holes allow easy removal of cores
- Cutting depth max 38 mm (1 1/2")
- 4 teeth per inch
- Max. hole size = nominal holesaw size +1.5 mm./- 0.0







ASSORTMENT:

All carbide tipped holesaws are packed in a cardboard box with an instruction leaflet enclosed

| 3832-14 | 7311518557744 | 1 | 6 | 14 | 30 |
|---------|---------------|---|---|----|----|
| 3832-16 | 7311518557768 | 1 | 6 | 16 | 35 |
| 3832-17 | 7311518557782 | 1 | 6 | 17 | 40 |
| 3832-19 | 7311518557805 | 1 | 6 | 19 | 43 |
| 3832-20 | 7311518557812 | 1 | 6 | 20 | 45 |
| 3832-21 | 7311518557829 | 1 | 6 | 21 | 50 |
| 3832-22 | 7311518557843 | 1 | 6 | 22 | 52 |
| 3832-24 | 7311518557867 | 1 | 6 | 24 | 55 |




| 3832-25 | 7311518557881 | 1 | 6 | 25 | 58 |
|---------|---------------|---|---|----|----|
| 3832-27 | 7311518557904 | 1 | 6 | 27 | 60 |
| 3832-29 | 7311518557928 | 1 | 6 | 29 | 65 |
| 3832-30 | 7311518557942 | 1 | 6 | 30 | 65 |
| 3832-32 | 7311518557966 | 1 | 6 | 32 | 70 |
| 3832-33 | 7311518557980 | 1 | 6 | 33 | 75 |
| 3832-35 | 7311518558000 | 1 | 6 | 35 | 75 |
| 3832-37 | 7311518558024 | 1 | 6 | 37 | 80 |

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| 3832-38 | 7311518558048 | 1 | 6 | 38 | 85 |
| 3832-40 | 7311518558062 | 1 | 6 | 40 | 90 |
| 3832-41 | 7311518558086 | 1 | 6 | 41 | 93 |
| 3832-43 | 7311518558109 | 1 | 6 | 43 | 100 |
| 3832-44 | 7311518558123 | 1 | 6 | 44 | 100 |
| 3832-46 | 7311518558147 | 1 | 6 | 46 | 115 |
| 3832-48 | 7311518558161 | 1 | 6 | 48 | 120 |
| 3832-51 | 7311518558185 | 1 | 6 | 51 | 135 |
| 3832-52 | 7311518558208 | 1 | 4 | 52 | 140 |
| 3832-54 | 7311518558222 | 1 | 4 | 54 | 150 |
| 3832-56 | 7311518558239 | 1 | 4 | 56 | 160 |
| 3832-57 | 7311518558246 | 1 | 4 | 57 | 165 |
| 3832-59 | 7311518558260 | 1 | 4 | 59 | 170 |
| 3832-60 | 7311518558284 | 1 | 4 | 60 | 177 |
| 3832-64 | 7311518558307 | 1 | 4 | 64 | 200 |
| 3832-65 | 7311518558321 | 1 | 4 | 65 | 205 |
| 3832-67 | 7311518558345 | 1 | 4 | 67 | 215 |
| 3832-68 | 7311518558352 | 1 | 4 | 68 | 220 |
| 3832-70 | 7311518558369 | 1 | 4 | 70 | 245 |
| 3832-73 | 7311518558383 | 1 | 4 | 73 | 270 |

|  |  |  |  |  |  |
|---|--|---|---|---|---|
| 3832-76 | 7311518558406 | 1 | 4 | 76 | 285 |
| 3832-79 | 7311518558420 | 1 | 4 | 79 | 295 |
| 3832-83 | 7311518558444 | 1 | 4 | 83 | 330 |
| 3832-86 | 7311518558468 | 1 | 4 | 86 | 350 |
| 3832-89 | 7311518558482 | 1 | 4 | 89 | 370 |
| 3832-92 | 7311518558505 | 1 | 4 | 92 | 380 |
| 3832-95 | 7311518558529 | 1 | 4 | 95 | 410 |
| 3832-98 | 7311518558543 | 1 | 4 | 98 | 430 |
| 3832-102 | 7311518558567 | 1 | 4 | 102 | 455 |
| 3832-105 | 7311518558581 | 1 | 4 | 105 | 475 |
| 3832-108 | 7311518558604 | 1 | 4 | 108 | 505 |
| 3832-111 | 7311518558611 | 1 | 4 | 111 | 530 |
| 3832-114 | 7311518558628 | 1 | 4 | 114 | 570 |
| 3832-121 | 7311518558642 | 1 | 1 | 121 | 635 |
| 3832-127 | 7311518558666 | 1 | 1 | 127 | 690 |
| 3832-133 | 7311518558673 | 1 | 1 | 133 | 765 |
| 3832-140 | 7311518558680 | 1 | 1 | 140 | 815 |
| 3832-146 | 7311518558697 | 1 | 1 | 146 | 860 |
| 3832-152 | 7311518558703 | 1 | 1 | 152 | 930 |

ARBORS AND PILOT DRILLS


ADAPT TO EACH SITUATION
FOR THE BEST RESULTS

| | Arbors | Pilot Drills |  |  |  |
|----------------------------|---|-----------------|---|---|---|
| HOLE SIZE UP TO 30 MM | Arbors with Quick-Eject function for easily removing the core | | | | |
| | 3834-ARBR-930EL | 3834-DRL-EL | ✓ | | |
| | 3834-ARBR-930ESM | 3834-DRL-HSS-ES | | ✓ | |
| | 3834-ARBR-930ES | 3834-DRL-ES | | | ✓ |
| | Standard Arbors | 3834-DRL-L | ✓ | | |
| | 3834-ARBR-630 | | | | |
| | 3834-ARBR-730 | 3834-DRL | | ✓ | |
| | 3834-ARBR-930 | | | | |
| | 3834-ARBR-1130 | 3834-DRL-CT | | | ✓ |
| | Arbors with SDS+ shank For machines with Quick-Change chucks | 3834-DRL-L | ✓ | | |
| 3834-ARBR-SD30 | 3834-DRL | | ✓ | | |
| | | 3834-DRL-CT | | | ✓ |
| HOLE SIZE 32 MM AND BIGGER | Arbors with Quick-Eject function for taking out the core easily | | | | |
| | 3834-ARBR-9100EL | 3834-DRL-EL | ✓ | | |
| | 3834-ARBR-9100ESM | 3834-DRL-HSS-ES | | ✓ | |
| | 3834-ARBR-9100ES | 3834-DRL-ES | | | ✓ |
| | Quick-Change Arbors for easy Holesaw changes | 3834-DRL-L | ✓ | | |
| | 3834-ARBR-9100QC | | | | |
| | 3834-ARBR-11152QC | 3834-DRL | | ✓ | |
| | 3834-ARBR-16152QC | 3834-DRL-CT | | | ✓ |
| | Power Driver™ Arbors for optimal stability | 3834-DRL-L | ✓ | | |
| | 3834-ARBR-9100 | | | | |
| | 3834-ARBR-11152 | 3834-DRL | | ✓ | |
| | 3834-ARBR-16152 | 3834-DRL-CT | | | ✓ |
| | Arbors with SDS+ shank For machines with Quick-Change chucks | 3834-DRL-L | ✓ | | |
| 3834-ARBR-SD152QC | 3834-DRL | | ✓ | | |
| | | 3834-DRL-CT | | | ✓ |

QUICK-EJECT ARBOR

**QUICK-EJECT ARBOR
SAVES TIME AND ENERGY**

QUICK-EJECT ARBOR FOR
FAST AND EASY CORE REMOVAL

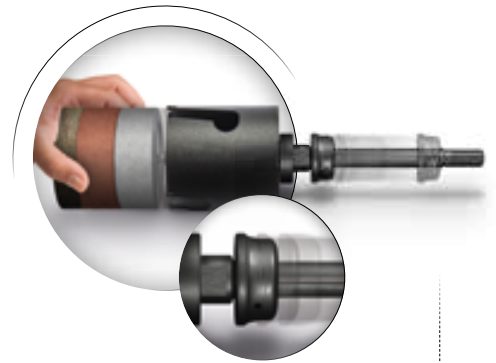

EASY QUICK-CHANGE
FEATURE FOR FAST
HOLESAW ATTACHMENT

CHOOSE THE RIGHT
PILOT DRILL FOR YOUR
APPLICATION

THE STRONG, HIGH-ALLOYED
STEEL BODY PREVENTS WOBBLE

FAST CORE EJECTION
SAVES TIME AND PREVENTS
BURNT FINGERS



3834-ARBR-EL/ES

QUICK-EJECT ARBOR



FEATURES:

- Arbors with a Quick-Eject function for taking out the core easily
- Arbors ending with EL are for Multi-Construction holesaws with All-round carbide drills included (Wood & Bricks)
- Arbors ending with ESM are for Bi-Metal holesaws with HSS drills included (Metal & Wood)
- Arbors ending with ES are for Carbide tipped holesaws with All-round carbide drills included (Fibreglass & Masonry)
- For enlarging existing holes, you can also buy 3834-UPSIZING that is suitable for use in combination with our Quick-Eject arbors
- All arbors are packed in retail packaging

ASSORTMENT:

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 |
|------------------|---------------|--------|--------|--------|--------|--------|--------|
| 3834-ARBR-930EL | 7314150265053 | 1 | 1 | 19-30 | 8.5 | 10 | 265 |
| 3834-ARBR-930ESM | 7314150390465 | 1 | 1 | 16-30 | 8.5 | 10 | 235 |
| 3834-ARBR-930ES | 7314150265046 | 1 | 1 | 16-30 | 8.5 | 10 | 220 |

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 |
|-------------------|---------------|--------|--------|--------|--------|--------|--------|
| 3834-ARBR-9100EL | 7314150265077 | 1 | 1 | 32-159 | 8.5 | 10 | 320 |
| 3834-ARBR-9100ESM | 7314150390458 | 1 | 1 | 32-152 | 8.5 | 10 | 295 |
| 3834-ARBR-9100ES | 7314150265060 | 1 | 1 | 32-152 | 8.5 | 10 | 285 |

3834-ARBR

ARBORS FOR 14-30 MM HOLESAWS



FEATURES:

- Arbors for small holesaws Ø14-30mm
- The difference is the shank size and shape
- 3834-ARBR-730 with triangular shank
- 3834-ARBR-630, -930, -1130 with hexagonal shank
- HSS Pilot drill 3834-DRL is included in all arbors, to be used for Metal & Wood applications
- Arbors can be used with Carbide holesaws but we recommend using the carbide tipped pilot drill, 3834-DRL-CT, for cutting abrasive materials
- Arbors can be used for Multi-Construction holesaws but it requires changing the drill to 3834-DRL-L
- All -C arbors are packed in retail packaging and the others are packed in a cardboard box with an instruction leaflet enclosed

ASSORTMENT:

| 3834-ARBR-630 | 7311518015558 | 1 | 1 | 14-30 | 6.4 | 8 | 70 | |
|-----------------|---------------|---|---|-------|---------|---|----|--|
| 3834-ARBR-630-C | 7311518228576 | 1 | 1 | 14-30 | 6.4 | 8 | 70 | |
| 3834-ARBR-730 | 7311518167974 | 1 | 1 | 14-30 | 6.4 TRI | 8 | 60 | |
| 3834-ARBR-730-C | 7311518225674 | 1 | 1 | 14-30 | 6.4 TRI | 8 | 60 | |

| 3834-ARBR-930 | 7311518015565 | 1 | 1 | 14-30 | 8.5 | 10 | 80 | |
|------------------|---------------|---|---|-------|------|----|----|--|
| 3834-ARBR-930-C | 7311518225681 | 1 | 1 | 14-30 | 8.5 | 10 | 80 | |
| 3834-ARBR-1130 | 7311518015572 | 1 | 1 | 14-30 | 11.1 | 13 | 90 | |
| 3834-ARBR-1130-C | 7311518228583 | 1 | 1 | 14-30 | 11.1 | 13 | 90 | |

3834-ARBR-QC

QUICK-CHANGE & POWER DRIVER ARBORS FOR 32-210 MM HOLESAWS



FEATURES:

- Arbors for large holesaws Ø32-210mm
- Arbors ending with QC have a quick-change mechanism where no additional tools are needed to change the holesaw
- 3834-ARBR-9100, -11152 and -16152, are equipped with Power Driver™ that increases the strength and eliminates play of the holesaw by redistributing the load from the thread to the solid cap
- We recommend not using arbors with 8.5mm (11/32") shanks for holesaws above 100mm (4")
- An HSS Pilot drill is included in all arbors, to be used for Metal & Wood applications
- Arbors can be used with Carbide holesaws but we recommend using the carbide tipped pilot drill, 3834-DRL-CT, for cutting abrasive materials
- Arbors can be used for Multi-Construction holesaws but it requires changing the drill to 3834-DRL-L
- All -C arbors are packed in a retail packaging and the others are packed in a cardboard box with an instruction leaflet enclosed

ASSORTMENT:

| 3834-ARBR-9100 | 7311518015589 | 1 | 1 | 32-100 | 8.5 | 10 | 250 | |
|--------------------|---------------|---|---|--------|------|----|-----|--|
| 3834-ARBR-9100-C | 7311518228590 | 1 | 1 | 32-100 | 8.5 | 10 | 250 | |
| 3834-ARBR-9100QC | 7311518249830 | 1 | 1 | 32-100 | 8.5 | 10 | 160 | |
| 3834-ARBR-9100QC-C | 7311518225704 | 1 | 1 | 32-100 | 8.5 | 10 | 160 | |
| 3834-ARBR-11152 | 7311518015596 | 1 | 1 | 32-152 | 11.1 | 13 | 260 | |

| 3834-ARBR-11152-C | 7311518225698 | 1 | 1 | 32-152 | 11.1 | 13 | 260 | |
|---------------------|---------------|---|---|--------|------|----|-----|--|
| 3834-ARBR-11152QC | 7311518167967 | 1 | 1 | 32-152 | 11.1 | 13 | 250 | |
| 3834-ARBR-11152QC-C | 7311518225711 | 1 | 1 | 32-152 | 11.1 | 13 | 250 | |
| 3834-ARBR-16152 | 7311518015602 | 1 | 1 | 32-210 | 15.4 | 20 | 310 | |
| 3834-ARBR-16152QC | 7311518453152 | 1 | 1 | 32-210 | 15.4 | 20 | 300 | |

3834-ARBR-SD

ARBORS WITH SDS+ DRIVE



FEATURES:

- Arbors with SDS+ drive shanks are designed for machines with quick chucks
- Simplifies the change of arbor
- SD30 is designed for small holesaws Ø14-30mm. Packed in a cardboard box
- SD152 is designed for large holesaws Ø32-152mm. Packed in a cardboard box
- An HSS Pilot drill 3834-DRL is included in all arbors, to be used for Metal & Wood applications
- Arbors can be used with Carbide holesaws but we recommend using the carbide tipped pilot drill, 3834-DRL-CT, for cutting abrasive materials
- Arbors can be used for Multi-Construction holesaws but it requires changing the drill to 3834-DRL-L

ASSORTMENT:

| | | | | | |
|----------------|---------------|---|---|-------|-----|
| | | | | | |
| 3834-ARBR-SD30 | 7311518203818 | 1 | 1 | 14-30 | 110 |

| | | | | | |
|-------------------|---------------|---|---|--------|-----|
| | | | | | |
| 3834-ARBR-SD152QC | 7311518203825 | 1 | 1 | 32-152 | 170 |

3834-DRL-HSS/-ES

PILOT DRILLS FOR QUICK-EJECT ARBORS



FEATURES:

- Short Quick-Eject drills to be used for arbors with the core Quick-Eject function ending with ES and ESM
- 3834-DRL-ES is an all-round pilot drill with an integrated carbide tip to enable high cutting performance in different materials such as fibreglass, masonry and wood. To be used with carbide holesaws
- 3834-DRL-HSS-ES is an HSS pilot drill with perfect performance in both Metal & Wood applications. To be used with bi-metal holesaws
- Packed in retail packaging

ASSORTMENT:

| | | | | | | |
|-------------|---------------|---|---|----------|----------|----|
| | | | | A | B | |
| 3834-DRL-ES | 7314150265091 | 1 | 1 | 6.35 | 138 | 45 |

| | | | | | | |
|-----------------|---------------|---|---|----------|----------|----|
| | | | | A | B | |
| 3834-DRL-HSS-ES | 7314150339396 | 1 | 1 | 6.35 | 138 | 45 |

3834-DRL-EL

CARBIDE TIPPED PILOT DRILL FOR QUICK-EJECT ARBORS



FEATURES:

- All Round Carbide Tipped Pilot Drill for Quick-Eject Arbors
- Specially designed to provide one drill to cover many different materials
- Enables high cutting performance in all machinable materials, from wood and plastic to brick and light concrete
- Packed in retail packaging

ASSORTMENT:

| | | | | | |
|-------------|---------------|---|---|----------|----|
| | | | | A | |
| 3834-DRL-EL | 7314150265114 | 1 | 1 | 6.35 | 60 |

3834-DRL

HSS PILOT DRILL FOR ARBORS



FEATURES:

- To be used in combination with Bi-Metal holesaws
- 3834-DRL fits any arbor except for arbors with a Quick-Eject function
- The HSS pilot drill makes a hole in the workpiece before the teeth of the holesaw become engaged, guiding and keeping the holesaw in the correct position during the sawing operation

- The HSS pilot drill is designed for Metal & Wood applications but not for abrasive materials, such as brick
- Packed in retail packaging

ASSORTMENT:

| Icon | Icon | Icon | Icon | A | B | Icon |
|----------|---------------|------|------|------|----|------|
| 3834-DRL | 7311518234638 | 1 | 1 | 6.35 | 81 | 20 |

3834-DRL-CT/L

CARBIDE TIPPED PILOT DRILLS FOR ARBORS



FEATURES:

- Drill ending with -L is for multi-construction holesaws
- Drill ending with -CT is for carbide holesaws
- These pilot drills fit any arbor except for those with the Quick-Eject function
- Carbide tipped pilot drills make a hole in the workpiece before the teeth of the holesaw become engaged, guiding and keeping the holesaw in the correct position during the sawing operation

- High grade carbide tip with special properties, hardness and geometry
- Specially designed to provide one drill to cover many different materials
- Enables high cutting performance in all machinable material from wood and plastic to brick and light concrete
- Packed in retail packaging

ASSORTMENT:

| Icon | Icon | Icon | Icon | A | B | Icon |
|------------|---------------|------|------|------|-----|------|
| 3834-DRL-L | 7314150265138 | 1 | 1 | 6.35 | 114 | 25 |

| Icon | Icon | Icon | Icon | A | B | Icon |
|-------------|---------------|------|------|------|----|------|
| 3834-DRL-CT | 7311518953201 | 1 | 1 | 6.35 | 81 | 35 |

3834-SCREWS

SPARE SCREWS FOR ARBORS



FEATURES:

- Spare screws for arbors when changing the pilot drill
- 3834-M6x29-SET is for Quick-Eject arbors (3834-ARBR-930EL, -930ES, -930ESM, -9100EL, -9100ES, -9100ESM)
- 3834-M8x5-SET is for arbor 3834-ARBR-9100, -11152

- 3834-M8x6-SET is for arbor 3834-ARBR-630, -730, -930, -1130, -SD30, -SD152QC, -9100QC, -11152QC, -16152QC
- 3834-M8x10-SET is for arbor 3834-ARBR-16152

ASSORTMENT:

| Icon | Icon | Icon | Icon |
|----------------|---------------|------|------|
| 3834-M6X29-SET | 7314150383450 | 3 | 9 |
| 3834-M8X5-SET | 7314150383443 | 3 | 9 |

| Icon | Icon | Icon | Icon |
|----------------|---------------|------|------|
| 3834-M8X6-SET | 7314150383436 | 3 | 9 |
| 3834-M8X10-SET | 7314150383429 | 3 | 9 |

3834-UPSIZ
UPSIZ ADAPTOR



FEATURES:

- Upsize adaptor for enlarging existing holes
- This product should be attached to the pilot drill with the hexagon screw
- To be used for both small ($\leq 32\text{mm}$) and big ($\geq 32\text{mm}$) holesaws
- Works excellent together with our Quick-Eject arbors
- Packed in retail packaging

ASSORTMENT:

| | | | | | | |
|------------|---------------|---|---|----------|----------|----|
| | | | | A | B | |
| 3834-UPSIZ | 7314150344567 | 1 | 1 | 20.5 | 19 | 26 |

3834-ADP
ARBOR ADAPTOR



FEATURES:

- Adapts small arbor threads ($1/2''-20\text{ UNF}$) to accommodate large holesaw threads ($5/8''-18\text{ UNF}$)
- Not recommended for holesaws larger than $\varnothing 44\text{ mm}$
- Fits arbor -630, -730, -930, -1130

ASSORTMENT:

| | | | | |
|----------|---------------|---|---|----|
| | | | | |
| 3834-ADP | 7311518454425 | 1 | 1 | 20 |

3834-ES
CORE EJECTION SPRING



FEATURES:

- For pilot drills, to facilitate core removal

ASSORTMENT:

| | | | | |
|---------|---------------|---|---|----|
| | | | | |
| 3834-ES | 7311518454418 | 1 | 1 | 10 |

3834-EXT
ARBOR EXTENSIONS



FEATURES:



- For reach in difficult-to-cut surroundings
- EXT-1 fits arbor -1130, -11152, -11152QC
- EXT-2 fits arbor -930, -9100, -9100QC

ASSORTMENT:

| | | | | | | |
|------------|---------------|---|---|------|-----|-----|
| | | | | | | |
| 3834-EXT-1 | 7311518040673 | 1 | 1 | 11.1 | 330 | 340 |
| 3834-EXT-2 | 7311518168070 | 1 | 1 | 8.5 | 330 | 340 |



170






SABRE SAW BLADES

170
PRODUCTS

PRODUCT INDEX

| | |
|--|----|
| <i>SABRE SAW BLADES FOR METAL</i> | 36 |
| <i>SABRE SAW BLADES FOR WOOD & METAL</i> | 39 |
| <i>SABRE SAW BLADES FOR WOOD</i> | 42 |
| <i>SABRE SAW BLADES FOR SPECIAL APPLICATIONS</i> | 44 |
| <i>SABRE SAW BLADES SETS</i> | 46 |

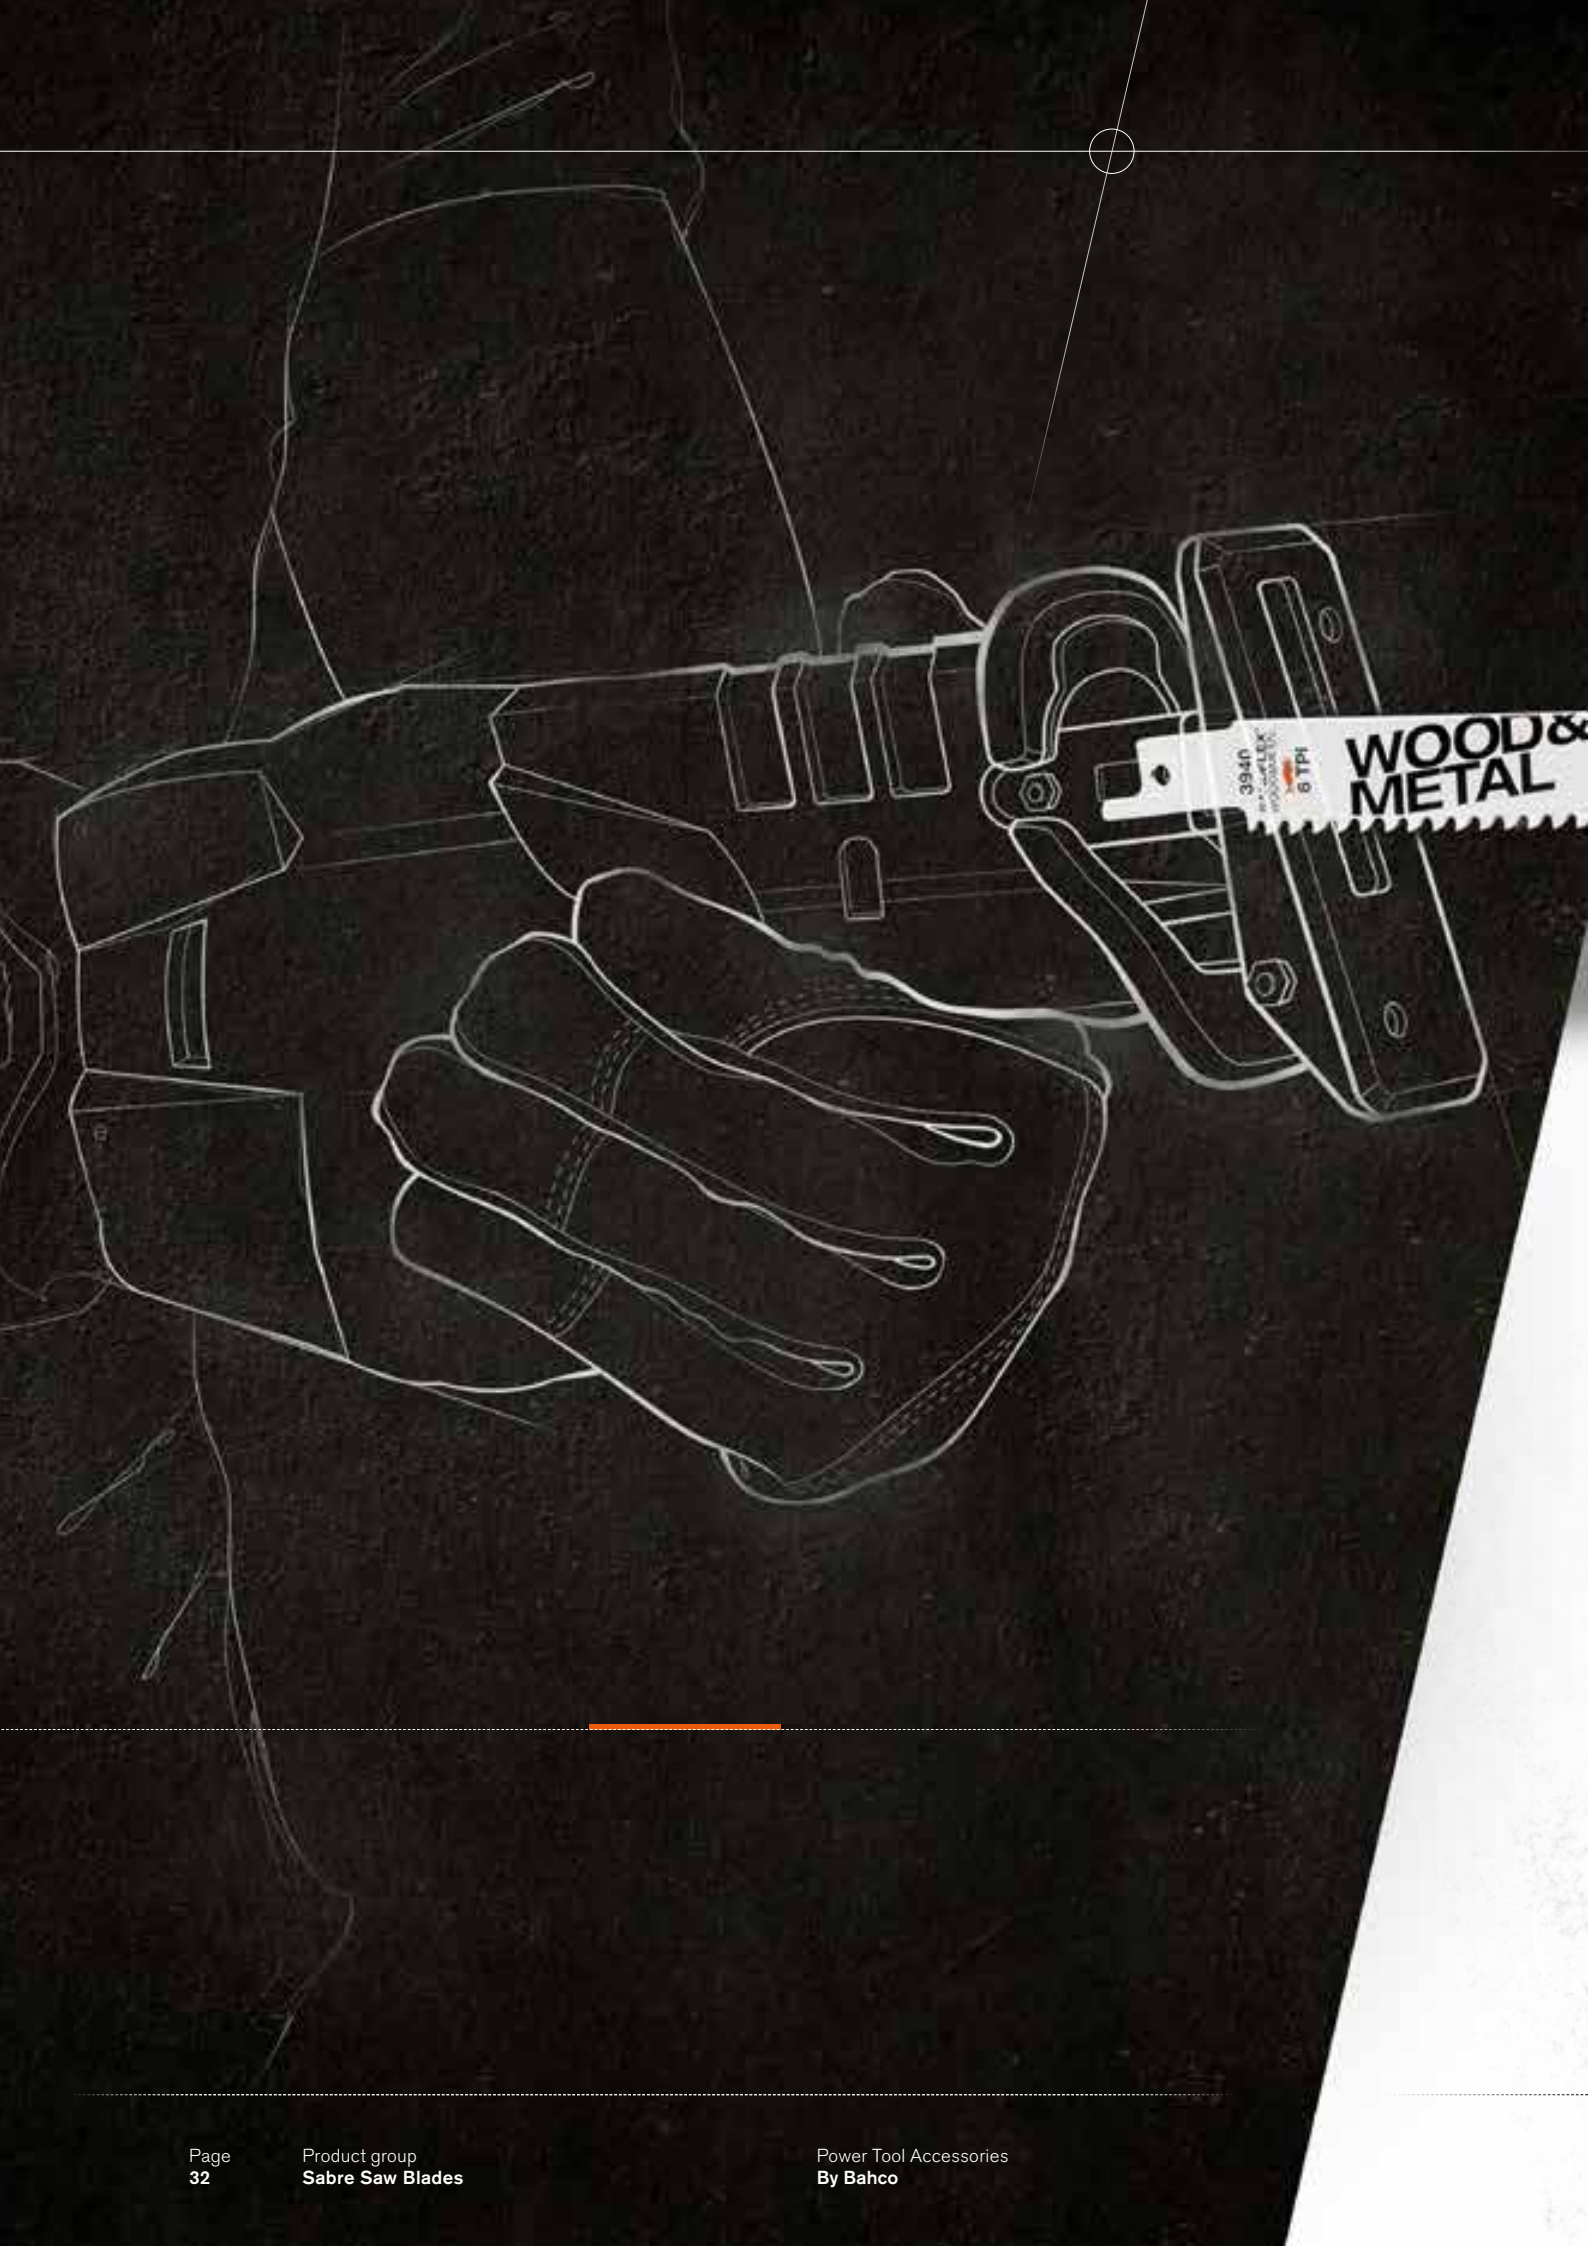

MANUFACTURED TO THE HIGHEST STANDARDS IN OUR FACTORY IN SWEDEN

BAHCO
MADE IN SWEDEN

170



**LONG-LIFE SANDFLEX® BI-METAL BLADES
WITH SHARP TEETH (HSS 8% COBALT)**



**QUICK SABRE SAW BLADE SELECTION
THANKS TO THE CLEAR BLADE MARKINGS**



**MANUFACTURED IN OUR FACTORY
IN EUROPE – FROM THE BI-METAL PROCESS
TO MANUFACTURING THE FINAL PRODUCT**

FULL OF POWER

Bahco has an exceptional range of reciprocating saw blades. Each of the four separate categories has a wide range of shapes, lengths and tootinging, with one for every application.

Our sabre saw blades are manufactured in our own factory in Europe – from the Bi-Metal process to manufacturing the final product. Our Bi-Metal (Sandflex®) blades are famous for their high quality and time-saving performance, and are highly respected by professionals. Our tough carbide tipped blades deliver impressive cutting power in any situation.

Whatever the task, you will produce faster, cleaner and more accurate cuts, time after time.

FULL SUPPORT



SELECT THE RIGHT TOOTHING (TPI)



Teeth per inch

| Material thickness | ≤ 3 mm | 3-10 mm | 11-20 mm | 21-50 mm | ≥ 50 mm |
|----------------------------------|--------|---------|----------------|----------|---------|
| Metal Saw Blades | 24 | 18 | 14 - 10 - 8/12 | 8/12 | |
| Metal and Wood Saw Blades | | 10/14 | 10 - 8/12 | 6 - 5/8 | 4/6 |
| Wood Saw Blades | | 11 | 7 | 7 - 5 | 5 |
| Special Saw Blades | | GRIT | 6 | 6 | 3 |

SABRE SAW BLADE SHAPES

Our range of sabre saw blades includes a variety of blade shapes for different styles of cutting.




Standard (ST)

For fast and aggressive straight cuts, but still flexible for narrow cutting.



Scroll (SC)

For contour sawing and sawing in difficult-to-reach places.



Demolition (DSL)

Extra thick and wide saw blades for demolition and heavy-duty work.



High Slope (HSL)

The wide body makes it highly resistant to bending, allowing straight cuts in wood.



Heavy Standard (HST)

The wide body makes it highly resistant to bending, allowing straighter cuts.



SLOPE (SL)

Thick blades with a narrow nose for sawing in tight spots, but highly resistant to bending.



Pallet repair (PR)

The rounded front design prevents the blade from getting stuck.

FULL RANGE

170
PRODUCTS

| |  |  |  |  |  |  |  |  |  | |
|--|---|---|---|---|--|---|---|---|---|---|
| SABRE SAW BLADES FOR METAL |  100-300 mm | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| |  150-300 mm | ✓ | ✓ | ✓ | ✓ | ✓ | | | | ✓ |
| |  100-150 mm | | ✓ | | | ✓ | ✓ | | | |
| |  100 mm | | ✓ | | | ✓ | | ✓ | ✓ | |
| SABRE SAW BLADES FOR WOOD & METAL |  150-300 mm | ✓ | ✓ | ✓ | | | | | | |
| |  150-300 mm | ✓ | | ✓ | ✓ | | | | | |
| |  228 mm | ✓ | | ✓ | ✓ | ✓ | ✓ | | | |
| |  228 mm | ✓ | ✓ | | | | | | | |
| SABRE SAW BLADES FOR WOOD |  228-300 mm | | ✓ | ✓ | | | | | | |
| |  228-300 mm | ✓ | ✓ | | | | | | | |
| |  228 mm | | | ✓ | ✓ | | ✓ | | | |
| |  150-300 mm | | | ✓ | | ✓ | | | | |
| SABRE SAW BLADES FOR SPECIAL APPLICATIONS |  150-300 mm | ✓ | ✓ | ✓ | | | | | | |
| |  300 mm | | | | ✓ | | | | | |
| |  100-150 mm | | | | | ✓ | ✓ | | | |

SABRE SAW BLADES **FOR METAL**



86 PRODUCTS



IMPROVED BLADE DESIGN BASED ON THE APPLICATION

VIRTUALLY UNBREAKABLE SANDFLEX® BI-METAL BLADES

SIMPLE SAW BLADE SELECTION THANKS TO THE PRINTED MATERIAL INFORMATION

SHARP LONG-LIFE TEETH (HSS 8% COBALT)

EASIER PENETRATION THANKS TO PRECISION-GROUND TOOTH GEOMETRY

MADE IN SWEDEN: FROM THE BI-METAL TO THE BLADE ITSELF

3940-M

SABRE SAW BI-METAL BLADES FOR METAL



FEATURES:

- The metal blade family is designed for demanding metal cutting
- A virtually unbreakable Sandflex® bi-metal blade for all materials and type of cut
- The standard-shaped (ST) blades with high performance and precision-ground teeth
- Standard-shape (ST) for fast and aggressive straight cuts but still flexible for narrow cutting

- Slope-shaped nose for various types of cuts
- Packaging alternative 1: Retail packed either in -2P = 2 blades or -5P = 5 blades per pack
- Packaging alternative 2: Industrial pack, -10P = 10 blades or in big industrial packs -100P = 100 blades per box

ASSORTMENT:

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 | Icon 9 |
|---------------------|---------------|--------|--------|--------|--------|--------|--------|--------|
| 3940-100-14-ST-2P | 7314150364312 | 2 | 5 | 100 | 0,9 | 14 | ST | 28 |
| 3940-100-14-ST-5P | 7314150364329 | 5 | 5 | 100 | 0,9 | 14 | ST | 70 |
| 3940-100-14-ST-10P | 7314150364336 | 10 | 1 | 100 | 0,9 | 14 | ST | 115 |
| 3940-100-18-ST-2P | 7314150364343 | 2 | 5 | 100 | 0,9 | 18 | ST | 28 |
| 3940-100-18-ST-5P | 7314150364350 | 5 | 5 | 100 | 0,9 | 18 | ST | 70 |
| 3940-100-18-ST-10P | 7314150364367 | 10 | 1 | 100 | 0,9 | 18 | ST | 115 |
| 3940-150-14-ST-2P | 7314150364152 | 2 | 5 | 150 | 0,9 | 14 | ST | 44 |
| 3940-150-14-ST-5P | 7314150364169 | 5 | 5 | 150 | 0,9 | 14 | ST | 110 |
| 3940-150-14-ST-10P | 7314150364176 | 10 | 1 | 150 | 0,9 | 14 | ST | 185 |
| 3940-150-14-ST-100P | 7314150364183 | 100 | 1 | 150 | 0,9 | 14 | ST | 1765 |


| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 | Icon 9 |
|---------------------|---------------|--------|--------|--------|--------|--------|--------|--------|
| 3940-150-18-ST-2P | 7314150364077 | 2 | 5 | 150 | 0,9 | 18 | ST | 44 |
| 3940-150-18-ST-5P | 7314150364084 | 5 | 5 | 150 | 0,9 | 18 | ST | 110 |
| 3940-150-18-ST-10P | 7314150364091 | 10 | 1 | 150 | 0,9 | 18 | ST | 175 |
| 3940-150-18-ST-100P | 7314150364107 | 100 | 1 | 150 | 0,9 | 18 | ST | 1700 |
| 3940-228-14-ST-2P | 7314150364114 | 2 | 5 | 228 | 0,9 | 14 | ST | 64 |
| 3940-228-14-ST-5P | 7314150364121 | 5 | 5 | 228 | 0,9 | 14 | ST | 160 |
| 3940-228-14-ST-10P | 7314150364138 | 10 | 1 | 228 | 0,9 | 14 | ST | 290 |
| 3940-228-14-ST-100P | 7314150364145 | 100 | 1 | 228 | 0,9 | 14 | ST | 2780 |
| 3940-228-18-ST-2P | 7314150364190 | 2 | 5 | 228 | 0,9 | 18 | ST | 68 |
| 3940-228-18-ST-5P | 7314150364206 | 5 | 5 | 228 | 0,9 | 18 | ST | 170 |

| 3940-228-18-ST-10P | 7314150364213 | 10 | 1 | 228 | 0,9 | 18 | ST | 295 |
|---------------------|---------------|-----|---|-----|-----|----|----|------|
| 3940-228-18-ST-100P | 7314150364220 | 100 | 1 | 228 | 0,9 | 18 | ST | 3200 |
| 3940-300-14-ST-2P | 7314150364237 | 2 | 5 | 300 | 0,9 | 14 | ST | 92 |
| 3940-300-14-ST-5P | 7314150364244 | 5 | 5 | 300 | 0,9 | 14 | ST | 230 |
| 3940-300-14-ST-10P | 7314150364251 | 10 | 1 | 300 | 0,9 | 14 | ST | 400 |

| 3940-300-14-ST-100P | 7314150364268 | 100 | 1 | 300 | 0,9 | 14 | ST | 3890 |
|---------------------|---------------|-----|---|-----|-----|----|----|------|
| 3940-300-18-ST-2P | 7314150364275 | 2 | 5 | 300 | 0,9 | 18 | ST | 92 |
| 3940-300-18-ST-5P | 7314150364282 | 5 | 5 | 300 | 0,9 | 18 | ST | 230 |
| 3940-300-18-ST-10P | 7314150364299 | 10 | 1 | 300 | 0,9 | 18 | ST | 400 |
| 3940-300-18-ST-100P | 7314150364305 | 100 | 1 | 300 | 0,9 | 18 | ST | 3900 |

3940-HM

SABRE SAW BI-METAL BLADES FOR HEAVY METAL



FEATURES:

- The Heavy Metal blade family is designed for demanding metal cutting in thick materials
- A virtually unbreakable Sandflex® bi-metal blade for all materials and type of cut
- Version 1: Heavy standard (HST) Bi-Metal blades with precision ground teeth are a series of extra thick blades with a wider body that makes it more rigid and has a higher resistance to fracturing and bending, allowing straighter cuts

- Version 2: Standard (ST) Bi-Metal blades with coarse precision ground teeth are a series of flexible blades with a standard body that makes it more flexible and easy to bend into position
- Slope-shaped nose for various types of cuts
- Packaging alternative 1: Retail packed either in -2P = 2 blades or -5P = 5 blades per pack
- Packaging alternative 2: Industrial pack, -10P = 10 blades per box

ASSORTMENT:

| 3940-150-10-HST-2P | 7314150364015 | 2 | 5 | 150 | 1,07 | 10 | HST | 56 |
|-----------------------|---------------|-----|---|-----|------|------|-----|------|
| 3940-150-10-HST-5P | 7314150364022 | 5 | 5 | 150 | 1,07 | 10 | HST | 140 |
| 3940-150-10-HST-10P | 7314150364039 | 10 | 1 | 150 | 1,07 | 10 | HST | 280 |
| 3940-150-10-ST-100P | 7314150362196 | 100 | 1 | 150 | 0,9 | 10 | ST | 1850 |
| 3940-150-10-ST-2P | 7314150362165 | 2 | 5 | 150 | 0,9 | 10 | ST | 44 |
| 3940-150-10-ST-5P | 7314150362172 | 5 | 5 | 150 | 0,9 | 10 | ST | 110 |
| 3940-150-10-ST-10P | 7314150362189 | 10 | 1 | 150 | 0,9 | 10 | ST | 190 |
| 3940-150-14-HST-2P | 7314150362325 | 2 | 5 | 150 | 1,07 | 14 | HST | 56 |
| 3940-150-14-HST-5P | 7314150362363 | 5 | 5 | 150 | 1,07 | 14 | HST | 140 |
| 3940-150-14-HST-10P | 7314150362370 | 10 | 1 | 150 | 1,07 | 14 | HST | 275 |
| 3940-150-18-HST-2P | 7314150364046 | 2 | 5 | 150 | 1,07 | 18 | HST | 60 |
| 3940-150-18-HST-5P | 7314150364053 | 5 | 5 | 150 | 1,07 | 18 | HST | 150 |
| 3940-150-18-HST-10P | 7314150364060 | 10 | 1 | 150 | 1,07 | 18 | HST | 280 |
| 3940-150-8/12-ST-2P | 7314150362127 | 2 | 5 | 150 | 0,9 | 8/12 | ST | 44 |
| 3940-150-8/12-ST-5P | 7314150362134 | 5 | 5 | 150 | 0,9 | 8/12 | ST | 110 |
| 3940-150-8/12-ST-10P | 7314150362141 | 10 | 1 | 150 | 0,9 | 8/12 | ST | 180 |
| 3940-150-8/12-ST-100P | 7314150362158 | 100 | 1 | 150 | 0,9 | 8/12 | ST | 1700 |
| 3940-228-10-HST-2P | 7314150362387 | 2 | 5 | 228 | 1,07 | 10 | HST | 84 |
| 3940-228-10-HST-5P | 7314150362394 | 5 | 5 | 228 | 1,07 | 10 | HST | 211 |
| 3940-228-10-HST-10P | 7314150362400 | 10 | 1 | 228 | 1,07 | 10 | HST | 422 |
| 3940-228-10-ST-2P | 7314150362080 | 2 | 5 | 228 | 0,9 | 10 | ST | 64 |
| 3940-228-10-ST-5P | 7314150362097 | 5 | 5 | 228 | 0,9 | 10 | ST | 160 |

| 3940-228-10-ST-10P | 7314150362103 | 10 | 1 | 228 | 0,9 | 10 | ST | 300 |
|-----------------------|---------------|-----|---|-----|------|------|-----|------|
| 3940-228-10-ST-100P | 7314150362110 | 100 | 1 | 228 | 0,9 | 10 | ST | 2820 |
| 3940-228-14-HST-2P | 7314150362202 | 2 | 5 | 228 | 1,07 | 14 | HST | 84,5 |
| 3940-228-14-HST-5P | 7314150362219 | 5 | 5 | 228 | 1,07 | 14 | HST | 211 |
| 3940-228-14-HST-10P | 7314150362226 | 10 | 1 | 228 | 1,07 | 14 | HST | 422 |
| 3940-228-18-HST-2P | 7314150362233 | 2 | 5 | 228 | 1,07 | 18 | HST | 84,5 |
| 3940-228-18-HST-5P | 7314150362264 | 5 | 5 | 228 | 1,07 | 18 | HST | 211 |
| 3940-228-18-HST-10P | 7314150362271 | 10 | 1 | 228 | 1,07 | 18 | HST | 422 |
| 3940-228-8/12-ST-2P | 7314150362042 | 2 | 5 | 228 | 1,3 | 8/12 | ST | 220 |
| 3940-228-8/12-ST-5P | 7314150362059 | 5 | 5 | 228 | 1,3 | 8/12 | ST | 85 |
| 3940-228-8/12-ST-10P | 7314150362066 | 10 | 1 | 228 | 1,3 | 8/12 | ST | 400 |
| 3940-228-8/12-ST-100P | 7314150362073 | 100 | 1 | 228 | 1,3 | 8/12 | ST | 3960 |
| 3940-300-10-HST-2P | 7314150362424 | 2 | 5 | 300 | 1,07 | 10 | HST | 128 |
| 3940-300-10-HST-5P | 7314150362431 | 5 | 5 | 300 | 1,07 | 10 | HST | 320 |
| 3940-300-10-HST-10P | 7314150362448 | 10 | 1 | 300 | 1,07 | 10 | HST | 600 |
| 3940-300-14-HST-2P | 7314150362288 | 2 | 5 | 300 | 1,07 | 14 | HST | 112 |
| 3940-300-14-HST-5P | 7314150362295 | 5 | 5 | 300 | 1,07 | 14 | HST | 280 |
| 3940-300-14-HST-10P | 7314150362301 | 10 | 1 | 300 | 1,07 | 14 | HST | 560 |
| 3940-300-18-HST-2P | 7314150363988 | 2 | 5 | 300 | 1,07 | 18 | HST | 112 |
| 3940-300-18-HST-5P | 7314150363995 | 5 | 5 | 300 | 1,07 | 18 | HST | 280 |
| 3940-300-18-HST-10P | 7314150364008 | 10 | 1 | 300 | 1,07 | 18 | HST | 560 |

3940-FM

SABRE SAW BI-METAL BLADES FOR FINE METAL



FEATURES:

- The Fine Metal blade family is designed for metal cutting in thin materials
- A virtually unbreakable Sandflex® bi-metal blade for all materials and type of cut
- The standard-shaped (ST) blades with high performance and precision-ground teeth
- Standard-shape (ST) for fast and aggressive straight cuts but still flexible for narrow cutting
- Slope-shaped nose for various types of cuts
- Packaging alternative 1: Retail packed either in -2P = 2 blades or -5P = 5 blades per pack
- Packaging alternative 2: Industrial pack, -10P = 10 blades or in big industrial packs -100P = 100 blades per box
- Packaging alternative 1: Retail packed either in -2P = 2 blades or -5P = 5 blades per pack
- Packaging alternative 2: Industrial pack, -10P = 10 blades per box

ASSORTMENT:

| 3940-100-24-ST-2P | 7314150364411 | 2 | 5 | 100 | 0,9 | 24 | ST | 280 | |
|--------------------|---------------|----|---|-----|-----|----|----|-----|--|
| 3940-100-24-ST-5P | 7314150364428 | 5 | 5 | 100 | 0,9 | 24 | ST | 70 | |
| 3940-100-24-ST-10P | 7314150364435 | 10 | 1 | 100 | 0,9 | 24 | ST | 115 | |
| 3940-150-24-ST-2P | 7314150364374 | 2 | 5 | 150 | 0,9 | 24 | ST | 44 | |

| 3940-150-24-ST-5P | 7314150364381 | 5 | 5 | 150 | 0,9 | 24 | ST | 110 | |
|---------------------|---------------|-----|---|-----|-----|----|----|------|--|
| 3940-150-24-ST-10P | 7314150364398 | 10 | 1 | 150 | 0,9 | 24 | ST | 190 | |
| 3940-150-24-ST-100P | 7314150364404 | 100 | 1 | 150 | 0,9 | 24 | ST | 1850 | |

3940-PM

SABRE SAW BI-METAL BLADES FOR METAL PRECISION



FEATURES:

- The Precision Metal scroll-shaped blades with high performance and precision-ground teeth
- A virtually unbreakable Sandflex® bi-metal blade for all materials and type of cut
- Specially developed for cutting metal
- Scroll (SC) shape for contour sawing and in difficult-to-reach places
- Packaging alternative 1: Retail packed either in -2P = 2 blades or -5P = 5 blades per pack
- Packaging alternative 2: Industrial pack, -10P = 10 blades per box

ASSORTMENT:

| 3940-100-14-SC-2P | 7314150364466 | 2 | 5 | 100 | 0,9 | 14 | SC | 18 | |
|-------------------|---------------|---|---|-----|-----|----|----|----|--|
| 3940-100-14-SC-5P | 7314150364473 | 5 | 5 | 100 | 0,9 | 14 | SC | 45 | |
| 3940-100-18-SC-2P | 7314150364442 | 2 | 5 | 100 | 0,9 | 18 | SC | 18 | |

| 3940-100-18-SC-5P | 7314150364459 | 5 | 5 | 100 | 0,9 | 18 | SC | 45 | |
|-------------------|---------------|---|---|-----|-----|----|----|----|--|
| 3940-100-24-SC-2P | 7314150364558 | 2 | 5 | 100 | 0,9 | 24 | SC | 18 | |
| 3940-100-24-SC-5P | 7314150364565 | 5 | 5 | 100 | 0,9 | 24 | SC | 45 | |

3940-FR

SABRE SAW BI-METAL BLADES FOR FIRE & RESCUE



FEATURES:

- The Fire & Rescue bi-metal blade with precision ground teeth is an extra heavy duty blade for metal/demolition applications, to be used in extreme conditions
- A virtually unbreakable Sandflex® bi-metal blade for all materials and types of cut
- Designed for use by the emergency services
- Slope-shaped for various cuts
- Packaging alternative 1: Retail packed either in -2P = 2 blades or -5P = 5 blades per pack
- Packaging alternative 2: Industrial pack, -10P = 10 blades or in big industrial packs -100P = 100 blades per box

ASSORTMENT:

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 | Icon 9 | Icon 10 |
|--------------------|---------------|--------|--------|--------|--------|--------|--------|--------|---------|
| 3940-228-10-DSL-2P | 7314150362004 | 2 | 5 | 228 | 1,6 | 10 | DSL | 95 | |
| 3940-228-10-DSL-5P | 7314150362011 | 5 | 5 | 228 | 1,6 | 10 | DSL | 238 | |

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 | Icon 9 | Icon 10 |
|---------------------|---------------|--------|--------|--------|--------|--------|--------|--------|---------|
| 3940-228-10-DSL-10P | 7314150362028 | 10 | 1 | 228 | 1,6 | 10 | DSL | 476 | |

3940-D

SABRE SAW BI-METAL BLADES FOR DEMOLITION



FEATURES:

- The Sandflex® Demolition slope (DSL) Bi-Metal blades are a series of extra thick and wide saw blades for demolition and heavy-duty work
- Perfect for nail-embedded wood
- A virtually unbreakable Sandflex® bi-metal blade for all materials and types of cut
- Slope-shaped for various types of cuts
- Packaging alternative 1: Retail packed either in -2P = 2 blades or -5P = 5 blades per pack
- Packaging alternative 2: Industrial pack, -10P = 10 blades or in big industrial packs -100P = 100 blades per box

ASSORTMENT:

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 | Icon 9 | Icon 10 |
|----------------------|---------------|--------|--------|--------|--------|--------|--------|--------|---------|
| 3940-150-5/8-DSL-2P | 7314150361977 | 2 | 5 | 150 | 1,6 | 5/8 | DSL | 60 | |
| 3940-150-5/8-DSL-5P | 7314150361984 | 5 | 5 | 150 | 1,6 | 5/8 | DSL | 150 | |
| 3940-150-5/8-DSL-10P | 7314150361991 | 10 | 1 | 150 | 1,6 | 5/8 | DSL | 280 | |
| 3940-228-5/8-DSL-2P | 7314150361915 | 2 | 5 | 228 | 1,6 | 5/8 | DSL | 120 | |
| 3940-228-5/8-DSL-5P | 7314150361922 | 5 | 5 | 228 | 1,6 | 5/8 | DSL | 260 | |

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 | Icon 9 | Icon 10 |
|----------------------|---------------|--------|--------|--------|--------|--------|--------|--------|---------|
| 3940-228-5/8-DSL-10P | 7314150361939 | 10 | 1 | 228 | 1,6 | 5/8 | DSL | 490 | |
| 3940-300-5/8-DSL-2P | 7314150361946 | 2 | 5 | 300 | 1,6 | 5/8 | DSL | 150 | |
| 3940-300-5/8-DSL-5P | 7314150361953 | 5 | 5 | 300 | 1,6 | 5/8 | DSL | 370 | |
| 3940-300-5/8-DSL-10P | 7314150361960 | 10 | 1 | 300 | 1,6 | 5/8 | DSL | 690 | |

3940-PR

SABRE SAW BI-METAL BLADES FOR PALLET REPAIR




FEATURES:

- The pallet repair blade is developed in close co-operation with pallet repair shops
- The unique front design prevents the blade front from getting stuck in close by wood beams when cutting nails in damaged parts of the pallet
- Virtually unbreakable Sandflex® bi-metal blade for all materials and type of cut
- By increasing the shank radius we have improved the fatigue strength
- 10/14 TPI has proved to be the most popular toothing amongst users in pallet repair shops. This toothing has good material removal rate in wood with nails and high strength to tooth breakage
- The packing quantities are 10 or 100 pcs in plastic tubes

ASSORTMENT:

| 3940-228-10/14-PRO9-10P | 7314150361519 | 10 | 1 | 228 | 0,9 | 10/14 | PR | | 300 |
|--------------------------|---------------|-----|---|-----|-----|-------|----|--|------|
| 3940-228-10/14-PRO9-100P | 7314150361526 | 100 | 1 | 228 | 0,9 | 10/14 | PR | | 2900 |

| 3940-228-10/14-PR13-100P | 7314150361649 | 100 | 1 | 228 | 0,9 | 10/14 | PR | | 4080 |
|--------------------------|---------------|-----|---|-----|-----|-------|----|--|------|
| 3940-228-8/12-PR13-100P | 7314150361601 | 100 | 1 | 228 | 1,3 | 8/12 | PR | | 4045 |

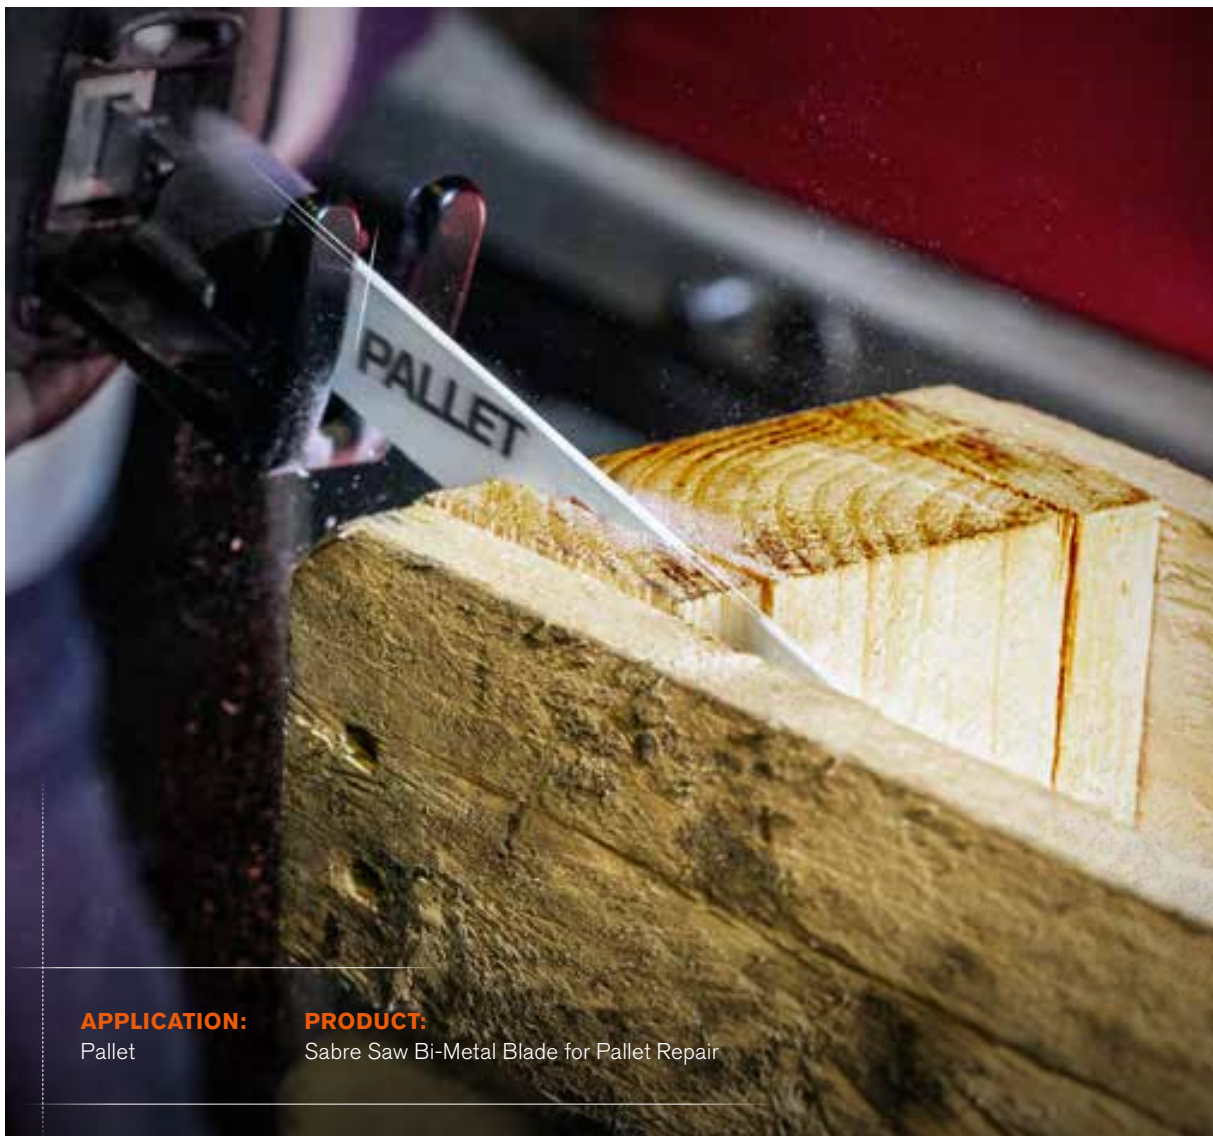

APPLICATION:

Pallet

PRODUCT:

Sabre Saw Bi-Metal Blade for Pallet Repair


SABRE SAW BLADES FOR WOOD



24 PRODUCTS



SIMPLE SAW BLADE SELECTION THANKS TO THE PRINTED MATERIAL INFORMATION



SPECIAL TOOTHING FOR FAST CROSS-CUTTING AND RIPPING

IMPROVED BLADE DESIGN BASED ON THE APPLICATION

STRONG HIGH-CARBON STEEL BLADES

LONG-LASTING INDUCTION-HARDENED TEETH



THE BEVEL-GROUND WOOD-CUTTING TOOTHING ALLOWS FASTER CROSS-CUTTING AND RIP-CUTTING

THE LOW-FRICTION COATING MINIMISES HEAT GENERATION

3942-W

SABRE SAW HCS BLADES FOR WOOD



FEATURES:

- Unique bevel-ground teeth provide a quick cut and deliver the best results in wood
- The blade is made of High Carbon Steel and the teeth are induction hardened for a very long life before being coated for minimum friction
- The toothing allows considerably faster cutting compared to traditional blades; 7 for all-round wood cut
- Packaging alternative 1: Retail packed either in -2P = 2 blades or -5P = 5 blades per pack
- Packaging alternative 2: Industrial pack, -10P = 10 blades per box

ASSORTMENT:

| Product Code | Material Code | Length (mm) | Width (mm) | Thickness (mm) | Teeth | Material | Weight (kg) |
|--------------------|---------------|-------------|------------|----------------|-------|----------|-------------|
| 3942-228-7-HSL-2P | 7314150364725 | 228 | 1 | 7 | HSL | 102 | |
| 3942-228-7-HSL-5P | 7314150364732 | 228 | 1 | 7 | HSL | 216 | |
| 3942-228-7-HSL-10P | 7314150364749 | 228 | 1 | 7 | HSL | 408 | |

| Product Code | Material Code | Length (mm) | Width (mm) | Thickness (mm) | Teeth | Material | Weight (kg) |
|--------------------|---------------|-------------|------------|----------------|-------|----------|-------------|
| 3942-300-7-HSL-2P | 7314150364756 | 300 | 1 | 7 | HSL | 134 | |
| 3942-300-7-HSL-5P | 7314150364763 | 300 | 1 | 7 | HSL | 284 | |
| 3942-300-7-HSL-10P | 7314150364770 | 300 | 1 | 7 | HSL | 368 | |

3942-CW

SABRE SAW HCS BLADES FOR COARSE WOOD



FEATURES:

- Unique bevel-ground teeth provide a quick cut and deliver the best results in coarse wood
- The toothing allows considerably faster cutting compared to traditional blades; 5 for coarse and very fast cuts
- The blade is made of High Carbon Steel and the teeth are induction hardened for a very long life before being coated for minimum friction

ASSORTMENT:

| 3942-228-5-HSL-2P | 7314150364633 | 2 | 5 | 228 | 1 | 5 | HSL | 102 | |
|--------------------|---------------|----|---|-----|---|---|-----|-----|--|
| 3942-228-5-HSL-5P | 7314150364640 | 5 | 5 | 228 | 1 | 5 | HSL | 216 | |
| 3942-228-5-HSL-10P | 7314150364657 | 10 | 1 | 228 | 1 | 5 | HSL | 408 | |

| 3942-300-5-HSL-2P | 7314150364664 | 2 | 5 | 300 | 1 | 5 | HSL | 134 | |
|--------------------|---------------|----|---|-----|---|---|-----|-----|--|
| 3942-300-5-HSL-5P | 7314150364671 | 5 | 5 | 300 | 1 | 5 | HSL | 284 | |
| 3942-300-5-HSL-10P | 7314150364688 | 10 | 1 | 300 | 1 | 5 | HSL | 368 | |

3942-WP

SABRE SAW HCS BLADES FOR WOOD & PLASTIC



FEATURES:

- The blade is made of High Carbon Steel and the teeth are induction hardened for a very long life before being coated for minimum friction
- Unique bevel-ground teeth provide a quick cut and deliver the best results in wood and plastic
- The toothing allows considerably faster cutting compared to traditional blades; 11 for fine cuts

ASSORTMENT:

| 3942-228-11-HSL-2P | 7314150364817 | 2 | 5 | 228 | 1 | 11 | HSL | 102 | |
|--------------------|---------------|---|---|-----|---|----|-----|-----|--|
| 3942-228-11-HSL-5P | 7314150364824 | 5 | 5 | 228 | 1 | 11 | HSL | 216 | |

| 3942-228-11-HSL-10P | 7314150364831 | 10 | 1 | 228 | 1 | 11 | HSL | 408 | |
|---------------------|---------------|----|---|-----|---|----|-----|-----|--|

3942-PB

SABRE SAW BI-METAL BLADES FOR PLASTER & BOARDS



FEATURES:

- The Plaster and Board Bi-Metal blade is designed for demanding cutting in both plaster and different types of wooden chip boards
- Slope (SL) shape for various types of cuts
- The toothing allows considerably faster cutting compared to traditional blades
- The blade is coated for minimum friction
- A virtually unbreakable Sandflex® Bi-Metal blade for all materials and type of cut

ASSORTMENT:


| 3942-150-7-SL-2P | 7314150364510 | 2 | 5 | 150 | 1,1 | 7 | SL | 46 | |
|-------------------|---------------|----|---|-----|-----|---|----|-----|--|
| 3942-150-7-SL-10P | 7314150364534 | 10 | 1 | 150 | 1,1 | 7 | SL | 190 | |
| 3942-150-7-SL-5P | 7314150364527 | 5 | 5 | 150 | 1,1 | 7 | SL | 115 | |
| 3942-228-7-SL-2P | 7314150364480 | 2 | 5 | 228 | 1,1 | 7 | SL | 76 | |
| 3942-228-7-SL-5P | 7314150364497 | 5 | 5 | 228 | 1,1 | 7 | SL | 190 | |

| 3942-228-7-SL-10P | 7314150364503 | 10 | 1 | 228 | 1,1 | 7 | SL | 360 | |
|-------------------|---------------|----|---|-----|-----|---|----|-----|--|
| 3942-300-7-SL-2P | 7314150364596 | 2 | 5 | 300 | 1,1 | 7 | SL | 112 | |
| 3942-300-7-SL-5P | 7314150364602 | 5 | 5 | 300 | 1,1 | 7 | SL | 280 | |
| 3942-300-7-SL-10P | 7314150364619 | 10 | 1 | 300 | 1,1 | 7 | SL | 525 | |

SABRE SAW BLADES FOR SPECIAL APPLICATIONS



7 PRODUCTS



**CARBIDE TIPPED FOR CUTTING
STONES AND BRICKS**

IMPROVED BLADE DESIGN
BASED ON THE APPLICATION

SIMPLE SAW BLADE SELECTION
THANKS TO THE PRINTED
MATERIAL INFORMATION

CARBIDE TIPPED TEETH ARE IDEAL
FOR DEMANDING APPLICATIONS

FOR FAST AND AGGRESSIVE
STRAIGHT CUTS

3946-CT

SABRE SAW CARBIDE TIPPED BLADES FOR STONE MATERIALS



FEATURES:

- A new wide range of 3 and 6 TPI carbide tipped blades for cutting of non-ferrous materials such as lightweight concrete, bricks, fibreglass
- Comes in two shapes, Slope (SL) shape for various types of cuts and Standard (ST) shape for fast and aggressive straight cuts


ASSORTMENT:

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 | Icon 9 |
|------------------|---------------|--------|--------|--------|--------|--------|--------|--------|
| 3946-150-6-SL-1P | 7314150364916 | 1 | 5 | 150 | 0,9 | 6 | SL | 45 |
| 3946-228-3-ST-1P | 7314150364886 | 1 | 5 | 228 | 0,9 | 3 | ST | 60 |
| 3946-228-6-ST-1P | 7314150402748 | 1 | 5 | 228 | 1,3 | 6 | ST | 95 |

| Icon 1 | Icon 2 | Icon 3 | Icon 4 | Icon 5 | Icon 6 | Icon 7 | Icon 8 | Icon 9 |
|------------------|---------------|--------|--------|--------|--------|--------|--------|--------|
| 3946-300-3-ST-1P | 7314150364879 | 1 | 5 | 300 | 1,5 | 3 | ST | 100 |
| 3946-300-6-ST-1P | 7314150364923 | 1 | 5 | 300 | 1,3 | 6 | ST | 120 |

3946-CG

SABRE SAW CARBIDE GRIT BLADES FOR TILE & GLASS



FEATURES:

- Carbide Grit for cutting hard materials such as tiles, ceramics and glass|Shape Standard (ST)

ASSORTMENT:

| | | | | | | | | |
|------------------|---------------|---|---|-----|-----|------|----|----|
| | | | | | | | | |
| 3946-100-G-ST-2P | 7314150364930 | 2 | 5 | 100 | 0,9 | Grit | ST | 45 |

| | | | | | | | | |
|------------------|---------------|---|---|-----|-----|------|----|-----|
| | | | | | | | | |
| 3946-150-G-ST-2P | 7314150364947 | 2 | 5 | 150 | 0,9 | Grit | ST | 120 |

3944

SABRE SAW STAINLESS STEEL BLADES FOR MEAT & ICE



FEATURES:

- Reciprocating blade made for cutting meat/bone and frozen materials
- 3 TPI blade made in stainless steel

ASSORTMENT:

| | | | | | | | | |
|--------------------|---------------|---|----|-----|------|---|----|----|
| | | | | | | | | |
| 3944-300-3-MEAT-1P | 7314150364862 | 1 | 10 | 300 | 1,25 | 3 | ST | 60 |

SABRE SAW BLADE SETS

5 PRODUCTS

**ALWAYS THE RIGHT
BLADE TO HAND**

3940-METAL-SET-5P

SABRE SAW BI-METAL BLADE SET FOR METAL



FEATURES:

- Metal blade set with five blades for cutting metal and fine metal
- A virtually unbreakable Sandflex® bi-metal blade for all materials and type of cut
- The standard-shaped (ST) blades with high performance and precision-ground teeth
- Standard (ST) shape for fast and aggressive straight cuts but still flexible for narrow cutting

ASSORTMENT:

| | | | | |
|-------------------|---------------|---|---|-----|
| | | | | |
| 3940-METAL-SET-5P | 7314150401673 | 1 | 5 | 125 |

3940-HDD-SET-5P

SABRE SAW BI-METAL BLADE SET FOR HEAVY METAL & DEMOLITION



FEATURES:

- Set of five demolition bi-metal blades, all extra thick and wide for demolition and heavy-duty work
- Perfect for all jobs from demolition of walls with nail-embedded wood to thick steel beams
- A virtually unbreakable Sandflex® bi-metal blade for all materials and type of cut
- Three slope-shaped (SL) and two Heavy metal blades (HSL) for various types of cuts

ASSORTMENT:

| | | | | |
|-----------------|---------------|---|---|-----|
| | | | | |
| 3940-HDD-SET-5P | 7314150401703 | 1 | 5 | 222 |

3940-MIX-SET-5P

SABRE SAW BLADE SET FOR WOOD & METAL



FEATURES:

- Mixed set of five blades with metal blades for cutting metal and fine metal as well as demanding cutting in wood with embedded nails
- Three blades for metal, one for wood and metal, and one for wood

ASSORTMENT:

| | | | | |
|-----------------|---------------|---|---|-----|
| | | | | |
| 3940-MIX-SET-5P | 7314150401659 | 1 | 5 | 150 |

3940-MIX-SET-10P

SABRE SAW BLADE SET FOR PLASTER, WOOD & METAL



FEATURES:

- Mixed set of ten blades for cutting metal and fine metal as well as demanding cutting in wood, even with embedded nails
- Six blades for metal, one for wood and metal, two for wood and one for plaster and boards

ASSORTMENT:

| | | | | |
|------------------|---------------|---|----|-----|
| | | | | |
| 3940-MIX-SET-10P | 7314150401666 | 1 | 10 | 245 |

3942-WOOD-SET-5P

SABRE SAW BLADE SET FOR WOOD




FEATURES:

- Set of five blades for wood cutting
- Four blades in HCS for pure in-wood and plastic materials
- One blade for wood with embedded nails

ASSORTMENT:

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| 3942-WOOD-SET-5P | 7314150401680 | 1 | 5 | 191 |



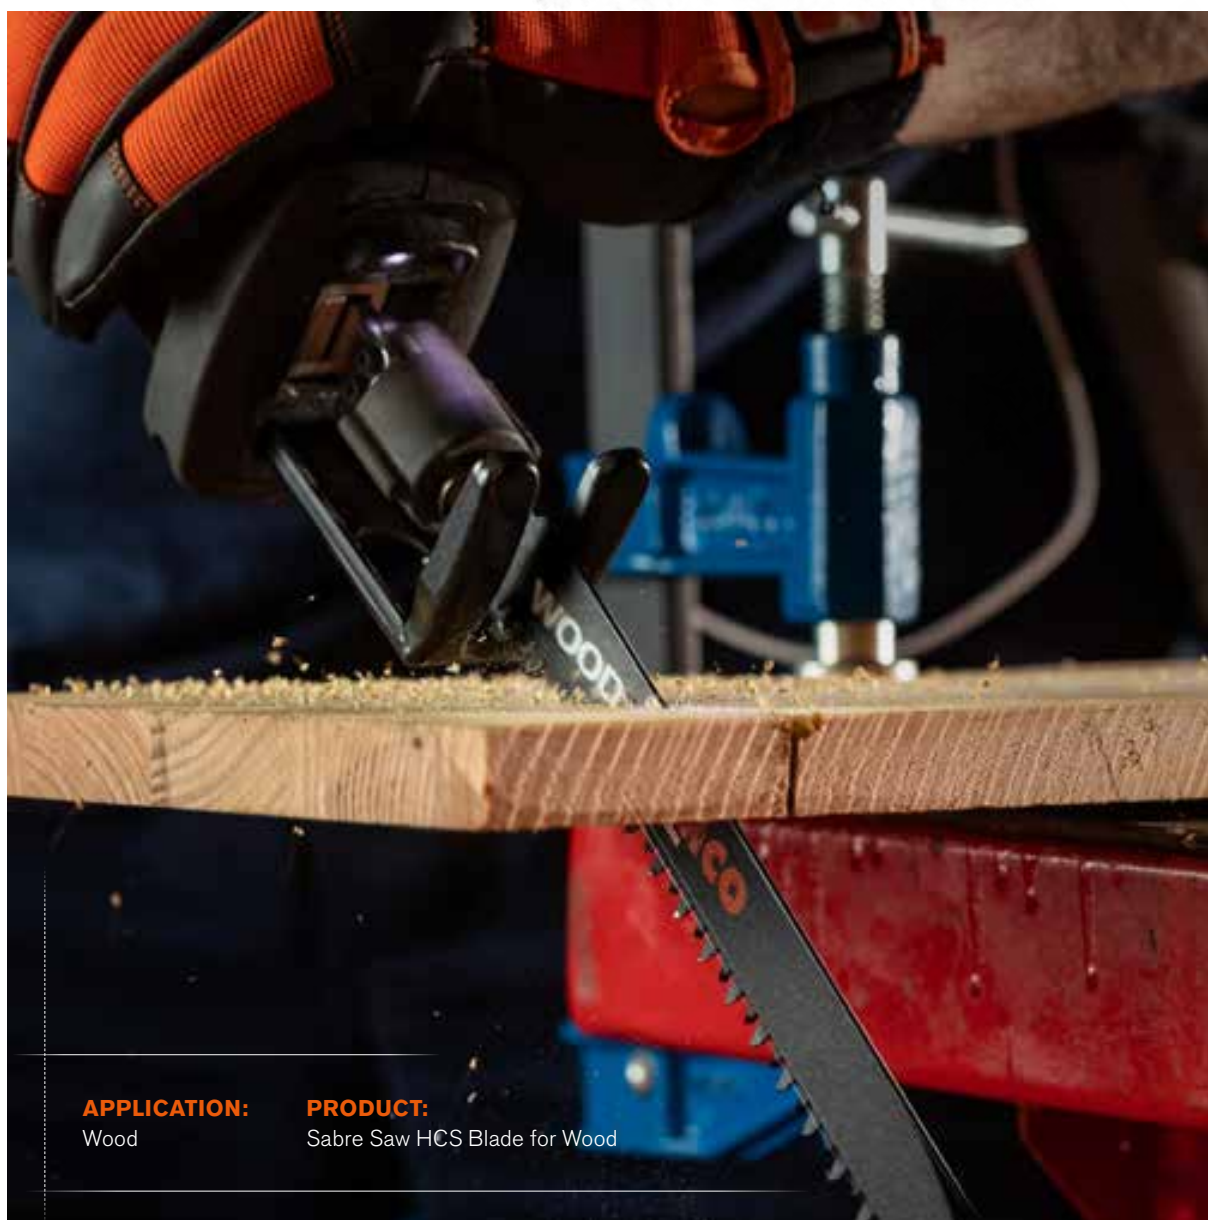


APPLICATION:

Wood

PRODUCT:

Sabre Saw HCS Blade for Wood



30






JIGSAW BLADES

30
PRODUCTS

PRODUCT INDEX

| | |
|---|----|
| <i>JIGSAW BLADES FOR METAL</i> | 54 |
| <i>JIGSAW BLADES FOR WOOD & METAL</i> | 55 |
| <i>JIGSAW BLADES FOR WOOD</i> | 56 |

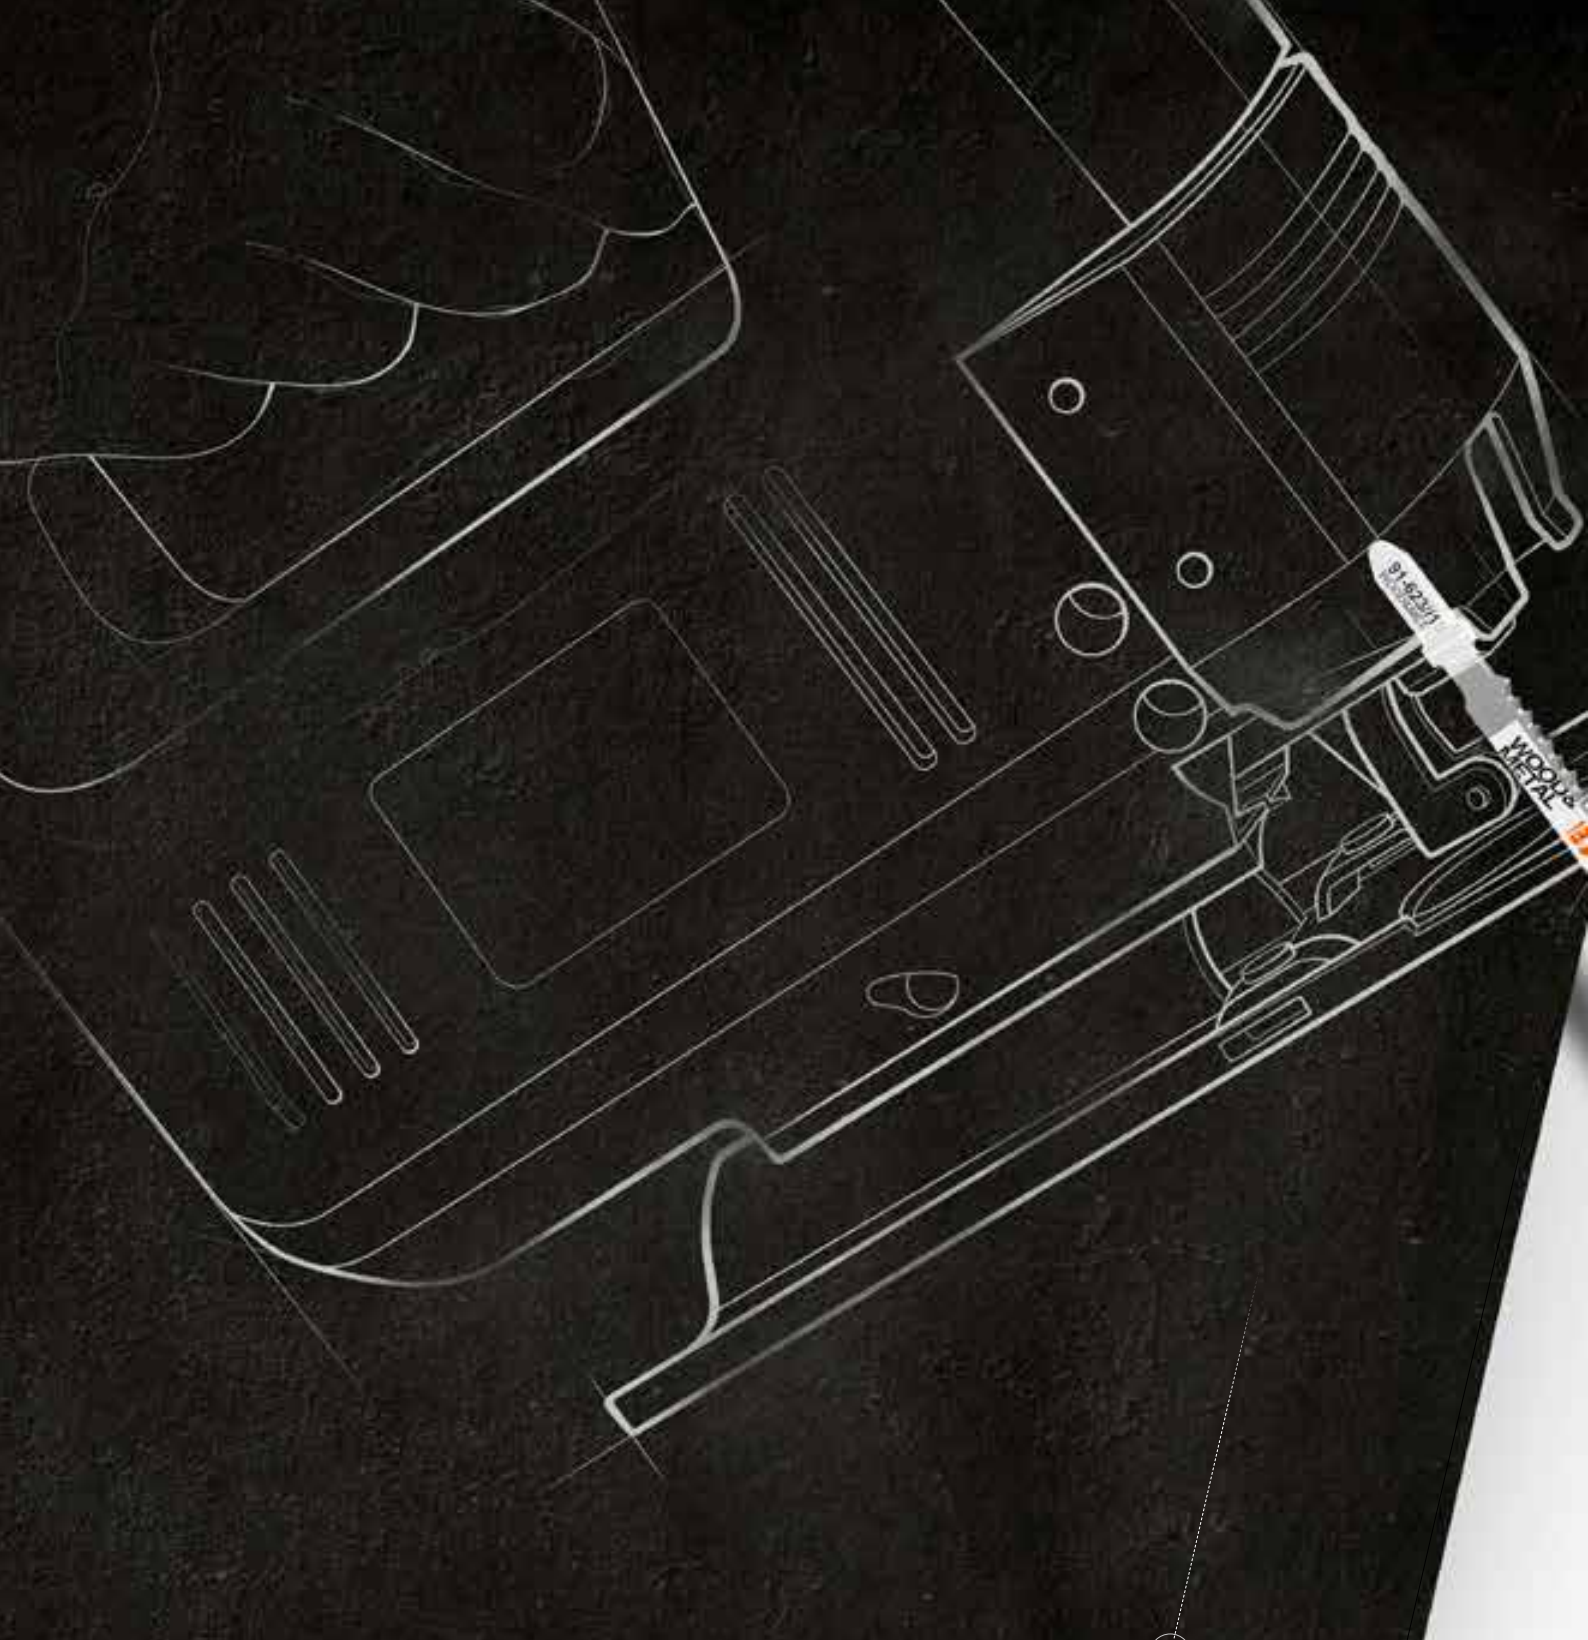

SAFE, PRODUCTIVE AND VIRTUALLY UNBREAKABLE BLADES

30



**MADE OF VIRTUALLY
UNBREAKABLE BI-METAL**



**PROGRESSIVE TOOTHING FOR
FAST AND CLEAN CUTS**



**UNIVERSAL T-SHANK FITS ALL COMMON
JIGSAW MACHINE BRANDS**

FULL OF POWER

Bahco Jigsaw Blades are easy to select and the best choice for you. For metal and wood, or aluminium and plastic, you will find a virtually unbreakable blade for every common application.

Our range of Bi-Metal blades provide the toughness of high-speed steel with the flexibility of spring steel. These blades maintain their sharpness for a long time and can withstand immense strain. The high-speed steel (HSS) blades are ideal for cutting metal, aluminium and non-ferrous metal. The excellent high-carbon steel (HCS) blades are specially made for softer materials such as wood, laminate and plastics.

FULL SUPPORT



SELECT THE RIGHT TOOTHING (TPI)




Teeth per inch

| Material thickness | ≤ 3 mm | 3-10 mm | 11-20 mm | 21-50 mm | ≥ 50 mm |
|--|---------|--------------------|---------------|-------------|-------------|
|  Jigsaw Blades for metal | 36 - 24 | 10/14 or Prog. | 14 or Prog. | 8 or Prog. | |
|  Jigsaw Blades for wood & metal | | 10 or Prog. | 10 or Prog. | 10 or Prog. | 10 or Prog. |
|  Jigsaw Blades for wood | 20 | 13 - 10 or 10 Rev. | 10 or 10 Rev. | 8-6 | 5 |

PROGRESSIVE TOOTHING

The new progressive toothing is a bonus when cutting thin materials. The teeth then become coarser and more effective further out from the shank, allowing thicker material to be processed. The design offers a blade that works optimally in most work situations. And with a universal t-shank, the blades fit almost every jigsaw machine.



FULL RANGE

30
PRODUCTS

| | JIGSAW BLADES FOR METAL | JIGSAW BLADES FOR WOOD & METAL | JIGSAW BLADES FOR WOOD |
|--------------------|---|--|---|
| Range |  3-16 mm (Head Diameter) |  3-16 mm (Head Diameter) |  3-16 mm (Head Diameter) |
| Application |  |  |  |



JIGSAW BLADES FOR METAL


10 PRODUCTS



**SHATTERPROOF
BI-METAL BLADES**

91-M

JIGSAW BLADES FOR METAL



FEATURES:

- These blades fit AEG, Atlas Copco, Bosch, DeWalt, Hitachi, Makita, Metabo, Milwaukee and similar machines
- Standardised T-Shank (also referred to as Euro shank)
- Type of blades:
HSS: High Speed Steel is long lasting and will cut through most materials
BiM: Bi-metal combines the cutting performance of HSS with the flexibility of carbon steel, the saw blades are shatterproof and suitable for cutting through all types of material
CT: Carbide Tipped, for abrasive materials. Ceramics, reinforced plastic, marble, glass
HM: Hard Metal

- A new progressive toothing has been introduced on our universal progressive blade
- The progressivity gives many fine teeth close to the shank, good when cutting thin material, the teeth then become coarser and more effective further out from the shank, allowing thicker material to be processed
- Packaging: -5P = 5 blades packed on informative card -1P = 1 blade packed on informative card

ASSORTMENT:

| | | | | | | A | | | |
|-----------|---------------|---|---|------|-----|---|-----|----|--|
| 91-3PM-5P | 7311518260156 | 5 | 1 | Prog | 100 | 2 | HSS | 45 | |
| 91-433-5P | 7311518260101 | 5 | 1 | 8 | 100 | 2 | HSS | 45 | |
| 91-502-5P | 7311518032746 | 5 | 1 | 36 | 75 | 1 | HSS | 45 | |
| 91-512-5P | 7311518032753 | 5 | 1 | 24 | 75 | 2 | HSS | 45 | |
| 91-517-5P | 7311518032777 | 5 | 1 | 24 | 75 | 2 | HSS | 45 | |

| | | | | | | A | | | |
|-----------|---------------|---|---|-------|-----|---|-----|----|--|
| 91-522-5P | 7311518032784 | 5 | 1 | 14 | 75 | 2 | HSS | 45 | |
| 91-611-5P | 7311518260071 | 5 | 1 | 24 | 132 | 1 | BiM | 45 | |
| 91-612-5P | 7311518032814 | 5 | 1 | 24 | 75 | 2 | BiM | 45 | |
| 91-622-5P | 7311518260088 | 5 | 1 | 14 | 75 | 1 | BiM | 45 | |
| 91-7V1-5P | 7311518260118 | 5 | 1 | 10/14 | 132 | 2 | BiM | 45 | |

JIGSAW BLADES FOR WOOD & METAL

3 PRODUCTS



**BLADES FIT ALL COMMON
JIGSAW MACHINES**

POWERFUL LONG-LASTING
BI-METAL BLADES

IMPROVED BLADE DESIGN
BASED ON THE APPLICATION


UNIVERSAL T-SHANK FITS ALL COMMON
JIGSAW MACHINE BRANDS

SUITABLE FOR CUTTING
THROUGH ALL TYPES OF MATERIAL

SIMPLE SAW BLADE SELECTION THANKS
TO THE PRINTED MATERIAL INFORMATION

91-WM

JIGSAW BLADES FOR WOOD & METAL



FEATURES:

- These blades fit AEG, Atlas Copco, Bosch, DeWalt, Hitachi, Makita, Metabo, Milwaukee and similar machines
- Standardised T-Shank (also referred to as Euro shank)
- Type of blades:
HCS: Carbon Steel, is suitable for cutting through wood, plastic and other soft materials
BiM: Bi-metal combines the cutting performance of HSS with the flexibility of carbon steel, the saw blades are shatterproof and suitable for cutting through all types of material

- A new progressive toothing has been introduced on our universal progressive blade
- The progressivity offers many fine teeth close to the shank, good when cutting thin material, the teeth then become coarser and more effective further out from the shank, allowing thicker material to be processed
- Packaging:-5P = 5 blades packed on informative card

ASSORTMENT:

| Product Code | Barcode | 5P | 1P | Material | Length (mm) | Teeth | Material | Weight (g) |
|--------------|---------------|----|----|----------|-------------|-------|----------|------------|
| 91-2PW-5P | 7311518260163 | 5 | 1 | Prog | 116 | 2 | HCS | 45 |
| 91-4PWM-5P | 7311518260170 | 5 | 1 | Prog | 132 | 2 | BiM | 45 |

| Product Code | Barcode | 5P | 1P | Material | Length (mm) | Teeth | Material | Weight (g) |
|--------------|---------------|----|----|----------|-------------|-------|----------|------------|
| 91-623-5P | 7311518260064 | 5 | 1 | 10 | 116 | 2 | BiM | 45 |

JIGSAW BLADES FOR WOOD

12 PRODUCTS



DESIGNED FOR FAST
ALL-ROUND WOOD CUTTING

POWERFUL LONG-LASTING BLADES
MADE OF HIGH CARBON STEEL

IMPROVED BLADE DESIGN
BASED ON THE APPLICATION


SIMPLE SAW BLADE SELECTION THANKS
TO THE PRINTED MATERIAL INFORMATION

UNIVERSAL T-SHANK FITS ALL COMMON
JIGSAW MACHINE BRANDS

FAST WOOD CUTTING TOOTHING

91-W

JIGSAW BLADES FOR WOOD



FEATURES:



- These blades fit AEG, Atlas Copco, Bosch, DeWalt, Hitachi, Makita, Metabo, Milwaukee and similar machines
- Standardised T-Shank (also referred to as Euro shank)
- Type of blades:
HCS: Carbon Steel, is suitable for cutting through wood, plastic and other soft materials
BiM: Bi-metal combines the cutting performance of HSS with the flexibility of carbon steel, the saw blades are shatterproof and suitable for cutting through all types of material. A new progressive toothing has been introduced on our universal progressive blade

- The progressivity offers many fine teeth close to the shank, good when cutting thin material, the teeth then become coarser and more effective further out from the shank, allowing thicker material to be processed
- Packaging: -5P = 5 blades packed on informative card * reversed teeth




ASSORTMENT:

| | | | | | | | A | | | |
|-----------|---------------|---|---|----|-----|---|-----|----|--|--|
| 91-434-5P | 7311518260026 | 5 | 1 | 8 | 116 | 1 | BiM | 45 | | |
| 91-444-5P | 7311518260033 | 5 | 1 | 6 | 152 | 3 | BiM | 45 | | |
| 91-023-5P | 7311518032593 | 5 | 1 | 8 | 100 | 2 | HCS | 45 | | |
| 91-027-5P | 7311518032616 | 5 | 1 | 13 | 83 | 2 | HCS | 45 | | |
| 91-143-5P | 7311518032630 | 5 | 1 | 6 | 100 | 3 | HCS | 45 | | |
| 91-148-5P | 7311518032654 | 5 | 1 | 6 | 100 | 3 | HCS | 45 | | |

| | | | | | | | A | | | |
|-----------|---------------|---|---|----|-----|----|-----|----|--|--|
| 91-223-5P | 7311518032661 | 5 | 1 | 10 | 100 | 1 | HCS | 45 | | |
| 91-226-5P | 7311518032685 | 5 | 1 | 10 | 100 | *1 | HCS | 45 | | |
| 91-243-5P | 7311518032692 | 5 | 1 | 6 | 100 | 1 | HCS | 45 | | |
| 91-412-5P | 7311518260040 | 5 | 1 | 20 | 76 | 1 | BiM | 45 | | |
| 91-443-5P | 7311518032722 | 5 | 1 | 6 | 100 | 1 | BiM | 45 | | |
| 91-233-5P | 7311518260057 | 5 | 1 | 8 | 116 | 1 | HCS | 45 | | |



66

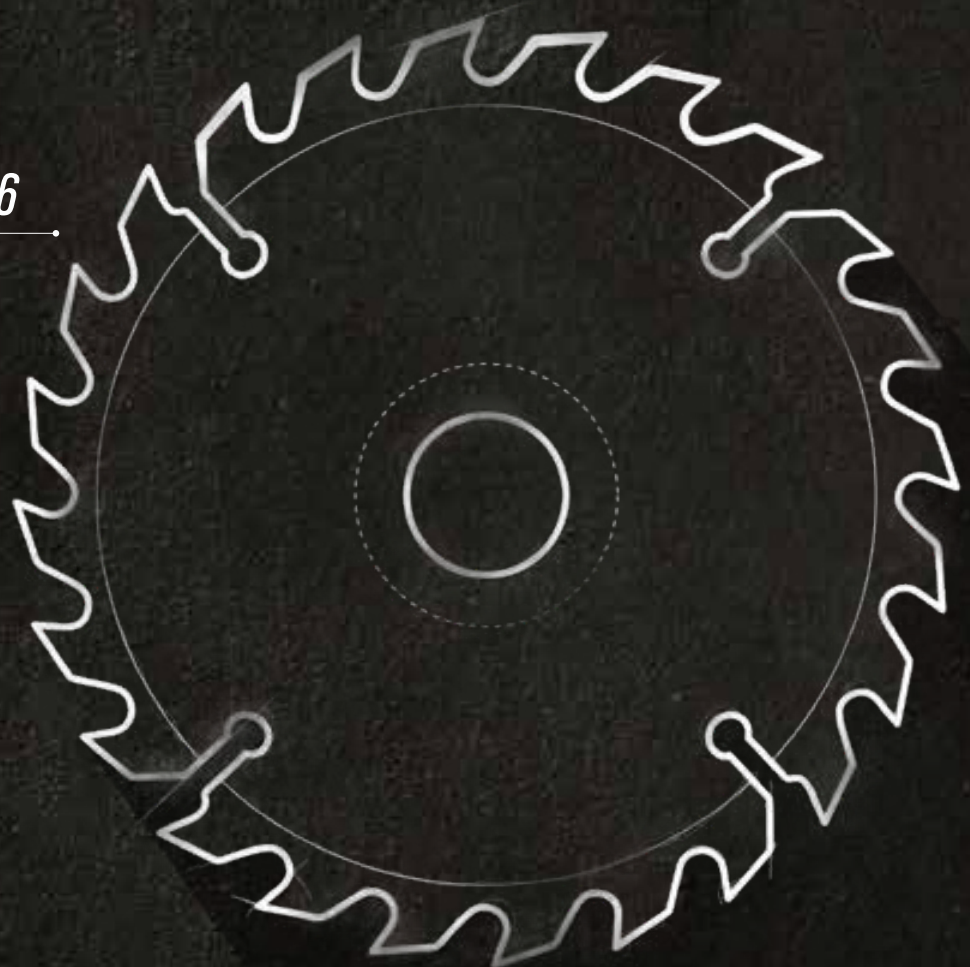



CIRCULAR SAW BLADES

PRODUCT INDEX

66
PRODUCTS

CIRCULAR SAW BLADES FOR WOOD 64

*CIRCULAR SAW BLADES
FOR ALUMINIUM AND PLASTIC* 67



POWERFUL BLADES MAKE WOOD CUTTING EASY AND PRECISE

66



THE CORDLESS BLADES HAVE AN ULTRA-THIN KERF TO CONSUME LESS POWER AND INCREASE EFFICIENCY WHILE CUTTING



HIGH-TECH PRECISION BRAZING PROCESS TO ENSURE ACCURATE AND STRONG FIXTURE OF THE CARBIDE TEETH



EXPANSION SLOTS KEEP THE BLADE FLAT AS THE BLADE WILL EXPAND AND CONTRACT DUE TO HEAT GENERATION

FULL OF POWER

We are committed to providing the best cutting tools for every application and machine. That's why our circular saw blades are built to last and give you strong performance every time.

Our assortment of circular saw blades has been designed to simplify the selection of blades for your needs. Depending on your machine, you can easily identify the correct blade to use. We have two well-known tooth shapes that are suitable for most applications.

FULL SUPPORT

GRINDING



Alternate Top Bevel (ATB)

ATB is the most common toothing for wood cutting. Suitable for all sorts of cutting and provides a clean finish.



Triple Chip Grind (TCG)

TCG/Trapezoidal blades provide balanced cutting force, low tooth drag and better chip clearance. This tooth shape prevents chipping in brittle materials. Use TCG blades when cutting plastics, aluminium and non-ferrous metals.

EASY SELECT:

THE TYPE OF MACHINE



BLADE DIMENSION

30mm Ø →

← 210mm Ø



MATERIAL TO CUT

MEDIUM
WOOD

HOOK (RAKER) ANGLES



**POSITIVE
HOOK ANGLE: 5-23°**

Portable and table saws require a positive angle to progress into the workpiece. A higher angle provides more aggressive cuts. Plunge saws have a 5° angle to be less aggressive when performing plunge cuts. ATB for wood cutting.



**NEUTRAL
HOOK ANGLE: 0°**

Machines that cut from above like mitre-and-chop saws have a neutral hook angle to avoid lifting the workpiece. With a neutral hook it will push the workpiece into the work surface. ATB for wood cutting.










**NEGATIVE
HOOK ANGLE: -5°**

The negative hook angle provides maximum control of the feed speed as it prevents self-feeding of materials. Use a negative hook angle when cutting metal. TCG in combination with a negative hook angle makes it perfect for cutting aluminium and other non-ferrous metals.

FULL RANGE

66
PRODUCTS



| | Blade size (A) | Bore size (B) | ● Coarse Wood | ● Medium Wood | ● Fine Wood | ● Alu. & Plastic |
|--|----------------|---------------|-----------------|------------------|------------------|------------------|
| Cordless saws 136-190mm  | 136 | 10 | | 8501-136-10-24C | | |
| | 136 | 20 | | 8501-136-20-24C | | |
| | 150 | 10 | | 8501-150-10-24C | | |
| | 160 | 20 | | 8501-160-20-24C | | |
| | 165 | 20 | | 8501-165-20-24C | | |
| | 184 | 20 | 8501-184-20-24C | | | |
| | 190 | 30 | 8501-190-30-24C | | | |
| Plunge saws 160-210mm  | 160 | 20 | | | 8501-160-20-48XF | |
| | 165 | 20 | | | 8501-165-20-48XF | |
| | 210 | 30 | | | 8501-210-30-60XF | |
| Portable saws 125-250mm  | 125 | 20 | 8501-2 | | | |
| | 130 | 20 | 8501-3 | | | |
| | 140 | 20 | 8501-4 | 8501-4F | 8501-4XF | |
| | 150 | 20 | 8501-5 | 8501-5F | | |
| | 160 | 20 | 8501-7 | 8501-7F | | |
| | 170 | 30 | 8501-10 | 8501-10F | | |
| | 180 | 30 | 8501-12 | 8501-12F | | |
| | 184 | 30 | 8501-184-16-24 | 8501-184-16-40 | | |
| | 184 | 16 | 8501-13 | 8501-13F | | |
| 190 | 30 | 8501-15 | 8501-15F | 8501-190-30-60XF | | |
| Table saws 200-250mm  | 200 | 30 | 8501-16 | 8501-16F | | |
| | 210 | 30 | 8501-17 | 8501-17F | 8501-210-30-60XF | |
| | 230 | 30 | 8501-22 | 8501-22F | 8501-230-30-60XF | |
| | 235 | 30 | 8501-23 | 8501-23F | 8501-235-30-60XF | |
| | 250 | 30 | 8501-28 | 8501-28F | 8501-28XF | |
| Site saws 300-400mm  | 300 | 30 | 8501-30 | 8501-30F | 8501-30XF | |
| | 315 | 30 | 8501-31 | 8501-31F | | |
| | 400 | 30 | 8501-40 | | | |
| Mitre saws 210-305mm  | 210 | 30 | | 8501-210-30-48SW | | 8501-17S |
| | 216 | 30 | 8501-16SW | 8501-18SW | 8501-216-60SW | 8501-18S |
| | 250 | 30 | | | 8501-28SW | 8501-28S |
| | 260 | 30 | 8501-260-24SW | 8501-260-40SW | 8501-260-60SW | 8501-260-30-80S |
| | 300 | 30 | | | 8501-30SW | 8501-30S |
| | 305 | 30 | | 8501-305-30-40SW | 8501-305-30-60SW | 8501-305-30-96S |

CIRCULAR SAW BLADES FOR WOOD

60 PRODUCTS



ALL SAW BLADES HAVE CLEAR USER COMMUNICATION

THE ATB TOOTH SHAPE PROVIDES A CLEAN FINISH FOR WOOD CUTTING

THE BLADES FOR CORDLESS ENSURE LONGER BATTERY LIFE THANKS TO THE ULTRA-THIN KERF DESIGN



THE CARBIDE-TIPPED TEETH ARE CEMENTED TO THE HARDENED COLD-ROLLED STEEL BLADE

REDUCING RINGS ARE SUPPLIED FOR SOME BLADES TO ENSURE THAT THE BLADES FIT SAFELY IN YOUR MACHINE WHEN THE BLADE BORE SIZE IS DIFFERENT.



8501-C

CIRCULAR SAW BLADES FOR WOOD IN CORDLESS SAWS



FEATURES:

- Carbide tipped circular saw blades for Cordless saw machines in wood applications
- An ultra-thin kerf provides less energy consumption for your cordless machine
- The thin blades give smooth and efficient cuts
- Positive hook angle

- Blades are made of hardened cold rolled steel
- Expansion slots to take up the expansion of the steel when in use
- Reducing rings (measurement D) are available for some blades to decrease the inner diameter if needed
- Packed in retail packaging

ASSORTMENT:

| | | | | | A | B | C | D | | |
|-----------------|---------------|---|---|-----|----|----|----|---|---|-----|
| 8501-136-10-24C | 7314150371471 | 1 | 1 | 136 | 10 | 24 | | | ● | 150 |
| 8501-136-20-24C | 7314150371488 | 1 | 1 | 136 | 20 | 24 | 16 | | ● | 149 |
| 8501-150-10-24C | 7314150403004 | 1 | 1 | 150 | 10 | 24 | | | ● | 177 |
| 8501-160-20-24C | 7314150403011 | 1 | 1 | 160 | 20 | 24 | 16 | | ● | 284 |

| | | | | | A | B | C | D | | |
|-----------------|---------------|---|---|-----|----|----|--------|---|---|-----|
| 8501-165-20-24C | 7314150403028 | 1 | 1 | 165 | 20 | 24 | 16, 10 | | ● | 240 |
| 8501-184-20-24C | 7314150403042 | 1 | 1 | 184 | 20 | 24 | | | ● | 277 |
| 8501-190-30-24C | 7314150403059 | 1 | 1 | 190 | 30 | 24 | | | ● | 302 |

8501-P/T

CIRCULAR SAW BLADES FOR WOOD IN PORTABLE & TABLE SAWS



FEATURES:

- Carbide tipped circular saw blades for Portable-/Table saw machines in wood applications
- Positive hook angle
- Blades are made of hardened cold rolled steel
- Expansion slots to take up the expansion of the steel when in use
- Reducing rings (measurement D) are available for some blades to decrease the inner diameter if needed
- Packed in retail packaging

ASSORTMENT:

| | | | | A | B | C | D | | |
|----------------|---------------|---|---|-----|----|----|--------------|---|-----|
| 8501-2 | 7311518004743 | 1 | 1 | 125 | 20 | 16 | 16, 13, 12,7 | ● | 120 |
| 8501-3 | 7311518004750 | 1 | 1 | 130 | 20 | 16 | 16, 13 | ● | 130 |
| 8501-4 | 7311518008079 | 1 | 1 | 140 | 20 | 16 | 16, 13 | ● | 155 |
| 8501-4F | 7311518220914 | 1 | 1 | 140 | 20 | 24 | 16, 13 | ● | 165 |
| 8501-4XF | 7311518281786 | 1 | 1 | 140 | 20 | 30 | 16, 13 | ● | 235 |
| 8501-5 | 7311518004774 | 1 | 1 | 150 | 20 | 18 | 16, 13 | ● | 180 |
| 8501-5F | 7311518220921 | 1 | 1 | 150 | 20 | 30 | 16, 13 | ● | 190 |
| 8501-7 | 7311518004798 | 1 | 1 | 160 | 20 | 18 | 16 | ● | 200 |
| 8501-7F | 7311518220938 | 1 | 1 | 160 | 20 | 30 | 16 | ● | 210 |
| 8501-10 | 7311518004828 | 1 | 1 | 170 | 30 | 18 | 20, 16 | ● | 215 |
| 8501-10F | 7311518220945 | 1 | 1 | 170 | 30 | 30 | 20, 16 | ● | 250 |
| 8501-12 | 7311518004842 | 1 | 1 | 180 | 30 | 20 | 20, 16 | ● | 250 |
| 8501-12F | 7311518220952 | 1 | 1 | 180 | 30 | 40 | 20, 16 | ● | 370 |
| 8501-13 | 7311518004859 | 1 | 1 | 184 | 30 | 24 | 28.6, 20 | ● | 275 |
| 8501-13F | 7311518220969 | 1 | 1 | 184 | 30 | 40 | 28.6, 20 | ● | 285 |
| 8501-184-16-24 | 7314150402946 | 1 | 1 | 184 | 16 | 24 | | ● | 366 |
| 8501-184-16-40 | 7314150402953 | 1 | 1 | 184 | 16 | 40 | | ● | 366 |

| | | | | A | B | C | D | | |
|------------------|---------------|---|---|-----|----|----|----------------|---|-----|
| 8501-15 | 7311518004873 | 1 | 1 | 190 | 30 | 20 | 20 | ● | 290 |
| 8501-15F | 7311518220976 | 1 | 1 | 190 | 30 | 40 | 20 | ● | 310 |
| 8501-190-30-60XF | 7314150402960 | 1 | 1 | 190 | 30 | 60 | 20 | ● | 428 |
| 8501-16 | 7311518004880 | 1 | 1 | 200 | 30 | 20 | 25, 20, 18, 16 | ● | 320 |
| 8501-16F | 7311518220983 | 1 | 1 | 200 | 30 | 40 | 25, 20, 18, 16 | ● | 335 |
| 8501-17 | 7311518004897 | 1 | 1 | 210 | 30 | 20 | 25, 20, 16 | ● | 350 |
| 8501-17F | 7311518220990 | 1 | 1 | 210 | 30 | 40 | 25, 20, 16 | ● | 385 |
| 8501-210-30-60XF | 7314150402977 | 1 | 1 | 210 | 30 | 60 | 25, 20, 16 | ● | 562 |
| 8501-22 | 7311518178888 | 1 | 1 | 230 | 30 | 20 | 25, 16 | ● | 500 |
| 8501-22F | 7311518221003 | 1 | 1 | 230 | 30 | 40 | 25, 16 | ● | 530 |
| 8501-230-30-60XF | 7314150402984 | 1 | 1 | 230 | 30 | 60 | 25, 16 | ● | 712 |
| 8501-23 | 7311518004958 | 1 | 1 | 235 | 30 | 30 | 25, 16 | ● | 560 |
| 8501-23F | 7311518018887 | 1 | 1 | 235 | 30 | 40 | 25, 16 | ● | 560 |
| 8501-235-30-60XF | 7314150402991 | 1 | 1 | 235 | 30 | 60 | 25, 16 | ● | 701 |
| 8501-28 | 7311518018894 | 1 | 1 | 250 | 30 | 24 | 25, 20, 16 | ● | 650 |
| 8501-28F | 7311518221010 | 1 | 1 | 250 | 30 | 40 | 25, 20, 16 | ● | 650 |
| 8501-28XF | 7311518281946 | 1 | 1 | 250 | 30 | 60 | 25, 20, 16 | ● | 795 |

8501-S

CIRCULAR SAW BLADES FOR WOOD IN SITE SAWS



FEATURES:

- Carbide tipped circular saw blades for Site saw machines in wood applications
- Positive hook angle
- Blades are made of hardened cold rolled steel
- Expansion slots to take up the expansion of the steel when in use
- Reducing rings (measurement D) are available for some blades to decrease the inner diameter if needed
- Packed in retail packaging


ASSORTMENT:

| | | | | A | B | C | D | | |
|-----------|---------------|---|---|-----|----|----|----|---|------|
| 8501-30 | 7311518237479 | 1 | 1 | 300 | 30 | 30 | 20 | ● | 1445 |
| 8501-30F | 7311518237462 | 1 | 1 | 300 | 30 | 40 | 20 | ● | 1100 |
| 8501-30XF | 7311518281984 | 1 | 1 | 300 | 30 | 60 | 20 | ● | 1470 |

| | | | | A | B | C | D | | |
|----------|---------------|---|---|-----|----|----|----|---|------|
| 8501-31 | 7311518237455 | 1 | 1 | 315 | 30 | 30 | 25 | ● | 1570 |
| 8501-31F | 7311518237448 | 1 | 1 | 315 | 30 | 40 | 20 | ● | 1300 |
| 8501-40 | 7311518282042 | 1 | 1 | 400 | 30 | 40 | 25 | ● | 2760 |

8501-P

CIRCULAR SAW BLADES FOR WOOD IN PLUNGE SAWS



FEATURES:

- Carbide tipped circular saw blades for Plunge saw machines in wood applications
- 5° Positive hook angle
- Blades are made of hardened cold rolled steel
- Expansion slots to take up the expansion of the steel when in use
- Reducing rings (measurement D) are available for some blades to decrease the inner diameter if needed
- Packed in retail packaging

ASSORTMENT:

| Icon | Icon | Icon | Icon | A | B | C | D | Icon | Icon |
|------------------|---------------|------|------|-----|----|----|---|------|------|
| 8501-160-20-48XF | 7314150402892 | 1 | 1 | 160 | 20 | 48 | | | 303 |

| Icon | Icon | Icon | Icon | A | B | C | D | Icon | Icon |
|------------------|---------------|------|------|-----|----|----|---|------|------|
| 8501-165-20-48XF | 7314150402908 | 1 | 1 | 165 | 20 | 48 | | | 311 |

8501-M

CIRCULAR SAW BLADES FOR WOOD IN MITRE SAWS



FEATURES:

- Carbide tipped circular saw blades for Mitre saw machines in wood applications
- 0° Neutral hook angle
- Blades are made of hardened cold rolled steel
- Expansion slots to take up the expansion of the steel when in use
- Reducing rings (measurement D) are available for some blades to decrease the inner diameter if needed
- Packed in retail packaging

ASSORTMENT:

| Icon | Icon | Icon | Icon | A | B | C | D | Icon | Icon |
|------------------|---------------|------|------|-----|----|----|------------|------|------|
| 8501-210-30-48SW | 7314150403066 | 1 | 1 | 210 | 30 | 48 | | | 569 |
| 8501-16SW | 7314150258642 | 1 | 1 | 216 | 30 | 24 | 25 | | 550 |
| 8501-18SW | 7311518221058 | 1 | 1 | 216 | 30 | 48 | 25 | | 635 |
| 8501-216-60SW | 7314150359448 | 1 | 1 | 216 | 30 | 60 | | | 597 |
| 8501-28SW | 7311518221065 | 1 | 1 | 250 | 30 | 60 | 25, 20, 16 | | 795 |
| 8501-260-24SW | 7314150359479 | 1 | 1 | 260 | 30 | 24 | | | 868 |

| Icon | Icon | Icon | Icon | A | B | C | D | Icon | Icon |
|------------------|---------------|------|------|-----|----|----|----|------|------|
| 8501-260-40SW | 7314150359462 | 1 | 1 | 260 | 30 | 40 | | | 873 |
| 8501-260-60SW | 7314150359455 | 1 | 1 | 260 | 30 | 60 | | | 866 |
| 8501-30SW | 7311518282196 | 1 | 1 | 300 | 30 | 60 | 20 | | 1400 |
| 8501-305-30-40SW | 7314150403073 | 1 | 1 | 305 | 30 | 40 | | | 1340 |
| 8501-305-30-60SW | 7314150403080 | 1 | 1 | 305 | 30 | 60 | | | 1340 |

CIRCULAR SAW BLADES FOR ALUMINIUM AND PLASTIC



6 PRODUCTS



A 5° NEGATIVE HOOK ANGLE WITH TRAPEZOIDAL TOOTHING FOR MAXIMUM CONTROL

A 5° NEGATIVE HOOK ANGLE WITH TRAPEZOIDAL TOOTHING

THE CARBIDE-TIPPED TEETH ARE CEMENTED TO THE HARDENED COLD ROLLED STEEL BLADE

LASER-CUT EXPANSION SLOTS DISPERSE HEAT AND PREVENT THE BLADE FROM WARPING



8501-AP

CIRCULAR SAW BLADES FOR ALUMINIUM & PLASTIC IN MITRE SAWS





FEATURES:

- Carbide tipped circular saw blades for Mitre saw machines in aluminium and plastic applications
- 5° Negative hook angle
- Trapezoidal grinding for cutting aluminium and plastics
- Blades are made of hardened cold rolled steel
- Expansion slots to take up the expansion of the steel when in use
- Reducing rings (measurement D) are available for some blades to decrease the inner diameter if needed
- Packed in retail packaging

ASSORTMENT:

| | | X | | A | B | C | D | | g |
|----------|---------------|---|---|-----|----|----|------------|---|-----|
| 8501-17S | 7311518221027 | 1 | 1 | 210 | 30 | 48 | 25 | ● | 580 |
| 8501-18S | 7311518221034 | 1 | 1 | 216 | 30 | 48 | 25 | ● | 595 |
| 8501-28S | 7311518221041 | 1 | 1 | 250 | 30 | 80 | 25, 20, 16 | ● | 770 |

| | | X | | A | B | C | D | | g |
|-----------------|---------------|---|---|-----|----|----|----|---|------|
| 8501-260-30-80S | 7314150403097 | 1 | 1 | 260 | 30 | 80 | 25 | ● | 866 |
| 8501-30S | 7311518282240 | 1 | 1 | 300 | 30 | 96 | 20 | ● | 1370 |
| 8501-305-30-96S | 7314150403103 | 1 | 1 | 305 | 30 | 96 | | ● | 1340 |



5





PORTABLE BAND SAW BLADES


PRODUCT INDEX

EASY-CUT PORTABAND

73

5

PRODUCTS

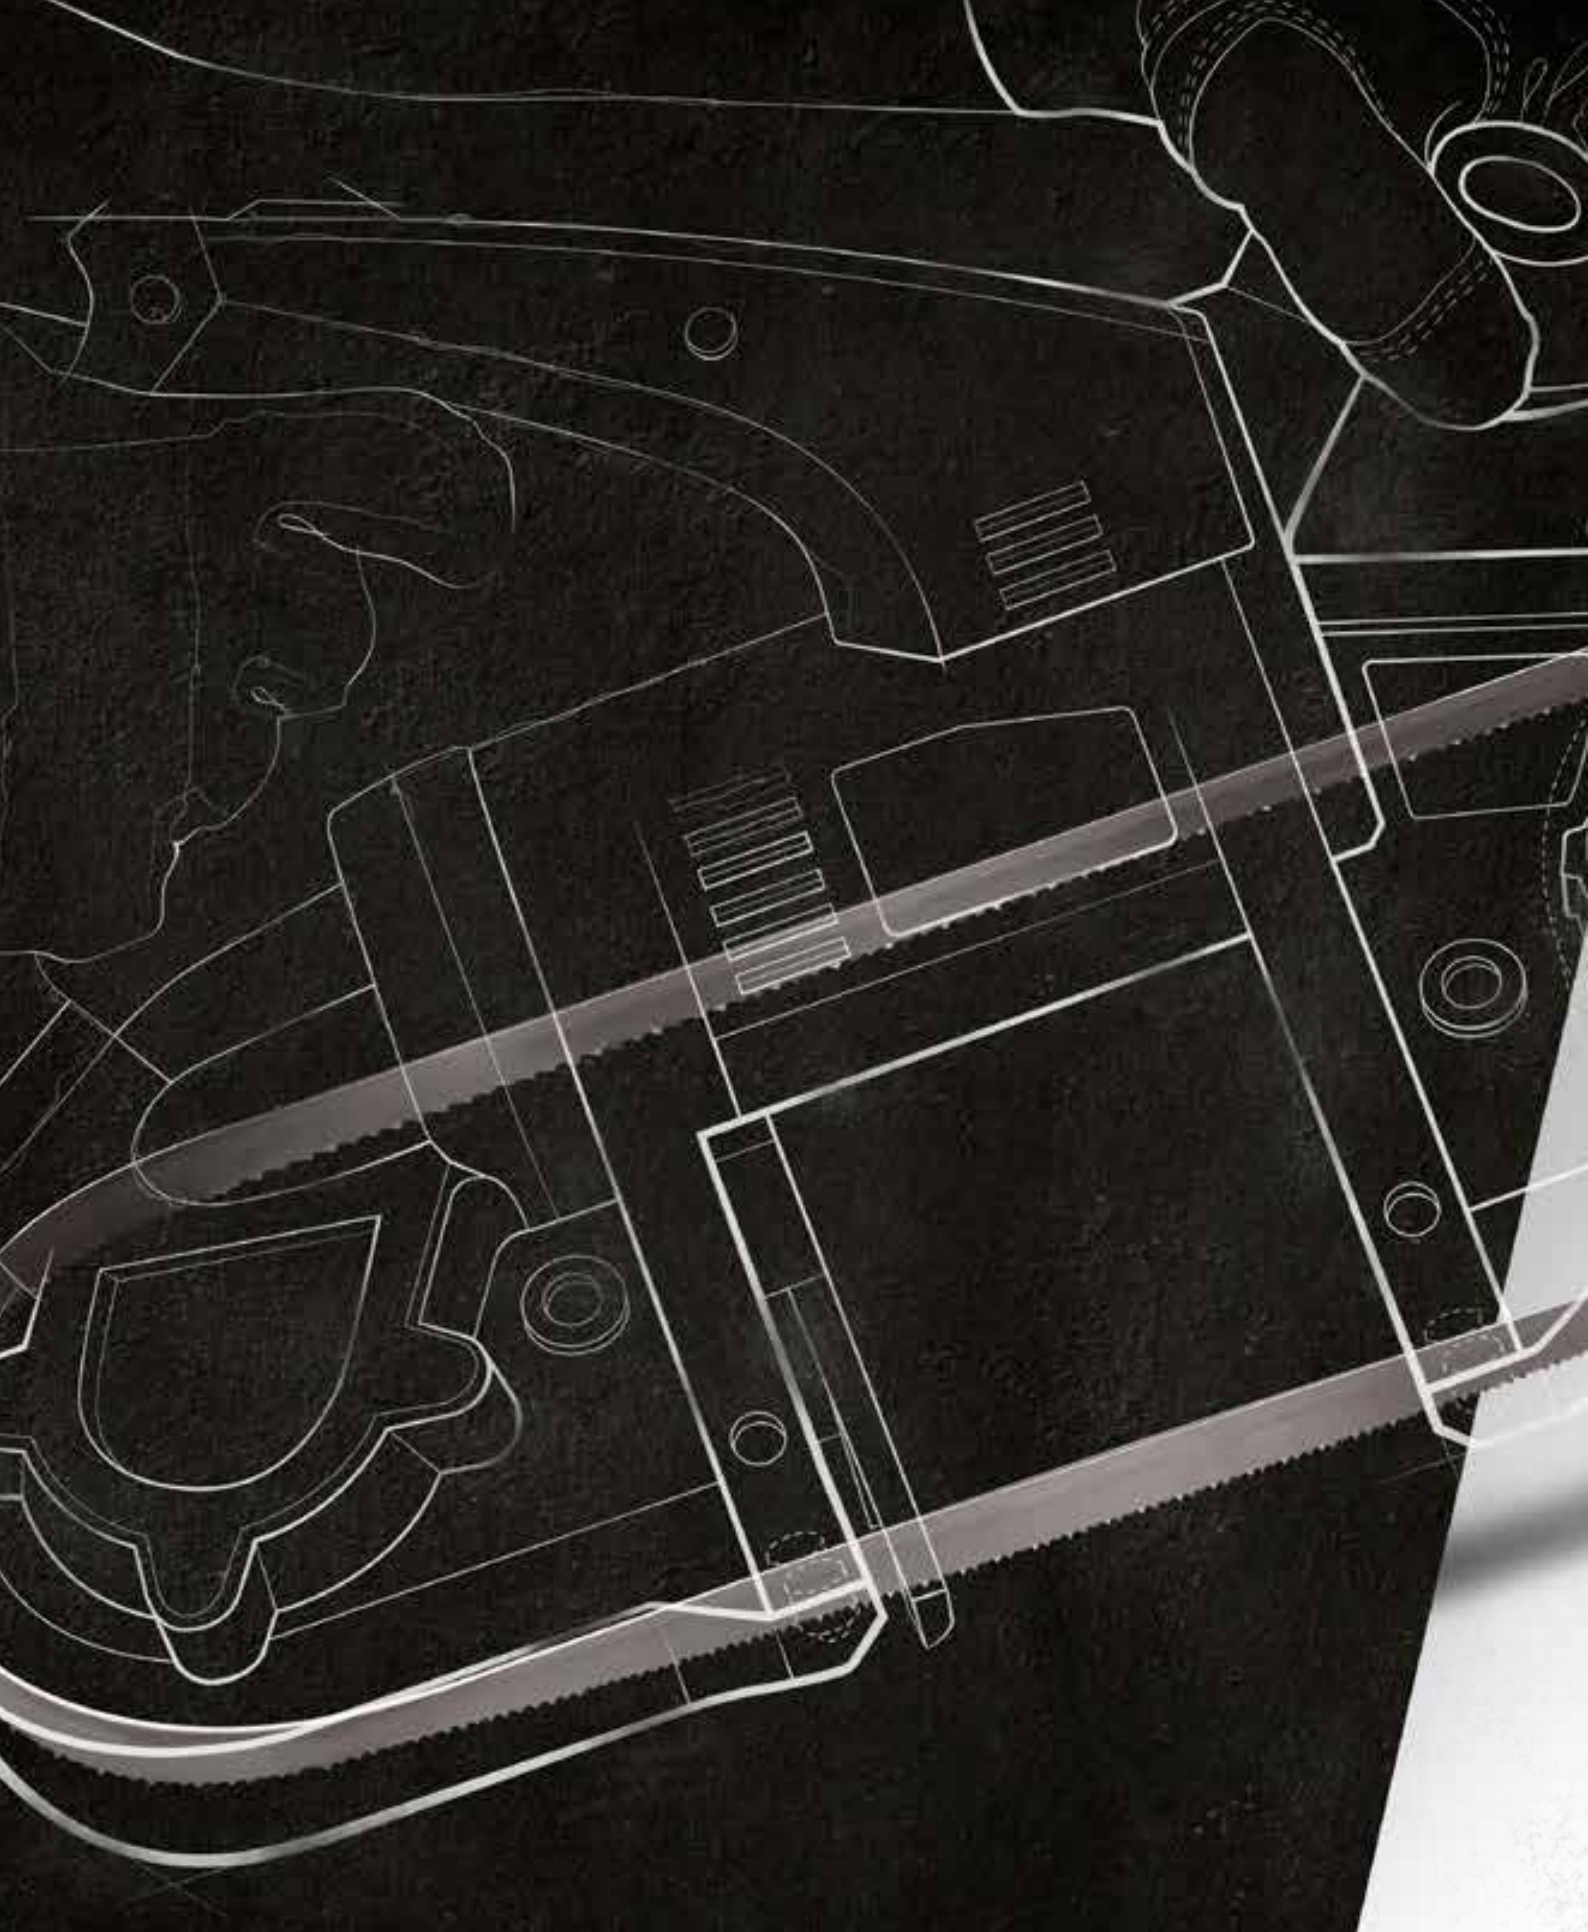

ONE BLADE **CUTS ALL!**

5



**ONE BLADE FOR A WIDE
RANGE OF MATERIALS, SHAPES
AND DIAMETERS**



**PATENTED ANTI-TOOTH-
STRIPPING DESIGN**



**FIT ALL COMMON PORTABLE
BAND SAW MACHINES**

FULL OF POWER



The Bi-Metal Portable Band Saw Blade is based on the idea of one blade cuts all. This easy-cut geometry provides a wider operating range than a conventional blade of similar TPI. This allows a smaller number of blades which still cover all material types and sizes.


Our Band Saw blades are made of Bi-Metal; High-Speed Steel tooth tips combined with flexible alloy-steel backing material. This gives you the most cost-effective band saw blades for most metal sawing applications.

We produce these Bi-Metal blades in our own factories in Europe – both the Bi-Metal and the saw itself. Even the testing takes place in our own R&D centre. That's why our cutting heritage is respected by professionals and is famous for its high-quality and 'time-per-cut'.

FULL SUPPORT

CUT IT ALL!

Easy-cut blades cut anything without changing blades.



- Wood
- Plastic
- Pipe
- Tubing
- Channel


- Sheet Metal
- Mild Steel
- Tool Steel
- Angle Iron
- Stainless steel

- Copper
- Brass
- Aluminium
- Drill rods
- Beams

- H and I beams
- Solids
- Bundles

EZ (EASY-CUT) TOOTHING

This patented design gives a very versatile blade, able to cut all common materials in addition to being highly resistant to tooth stripping. In combination with the multi-purpose tooth shape, it is ideal for small workshops cutting different sizes in different materials. Now you can spend more time cutting and less time changing saw blades!

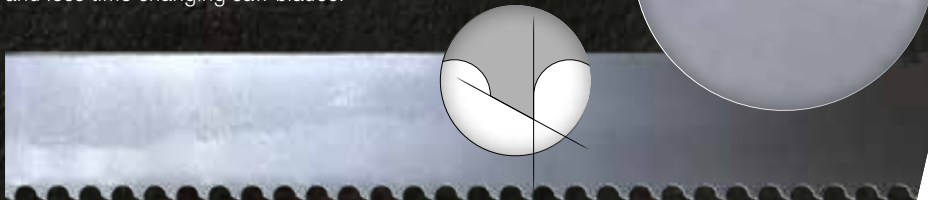

BI-METAL BLADE; HIGH-SPEED STEEL TOOTH TIPS COMBINED WITH FLEXIBLE ALLOY-STEEL BACKING MATERIAL

3857 EASY-CUT PORTABAND EASY-CUT PORTABAND





FEATURES:

- The Easy-Cut is a new generation of General Purpose Bandsaw Blade
- The same blade will cut a much wider range of materials and shapes
- Specially designed for cutting ferrous, non-ferrous materials, solids, pipes, profiles or bundles
- When also cutting solid materials, we recommend (M) medium tothing for the best results
- New and unique, innovative tooth design, which allows a much wider operating range than a conventional tooth type
- Available lengths in MM: 1140 - 900 - 835 - 730 - 690
- Just choose the blade according to your work-piece size
- 3 blades are packed in each box

ASSORTMENT:

| 3857-13-0.6-EZ-S-3P690 | 7314150345694 | 3 | 1 | 13 | 0,6 | S | EZ | 690 | 54,7 |
|-------------------------|---------------|---|---|----|-----|---|----|------|------|
| 3857-13-0.6-EZ-S-3P730 | 7314150345700 | 3 | 1 | 13 | 0,6 | S | EZ | 730 | 54,7 |
| 3857-13-0.6-EZ-S-3P835 | 7314150345717 | 3 | 1 | 13 | 0,6 | S | EZ | 835 | 54,7 |
| 3857-13-0.6-EZ-S-3P900 | 7314150345724 | 3 | 1 | 13 | 0,6 | S | EZ | 900 | 54,7 |
| 3857-13-0.6-EZ-S-3P1140 | 7314150345731 | 3 | 1 | 13 | 0,6 | S | EZ | 1140 | 54,7 |



384






ROTARY BURRS

384
PRODUCTS

PRODUCT INDEX

| | |
|---|----|
| <i>CARBIDE ROTARY BURRS</i> | 82 |
| <i>CARBIDE ROTARY BURRS FOR ALUMINIUM</i> | 90 |
| <i>HIGH-SPEED STEEL ROTARY BURRS</i> | 93 |

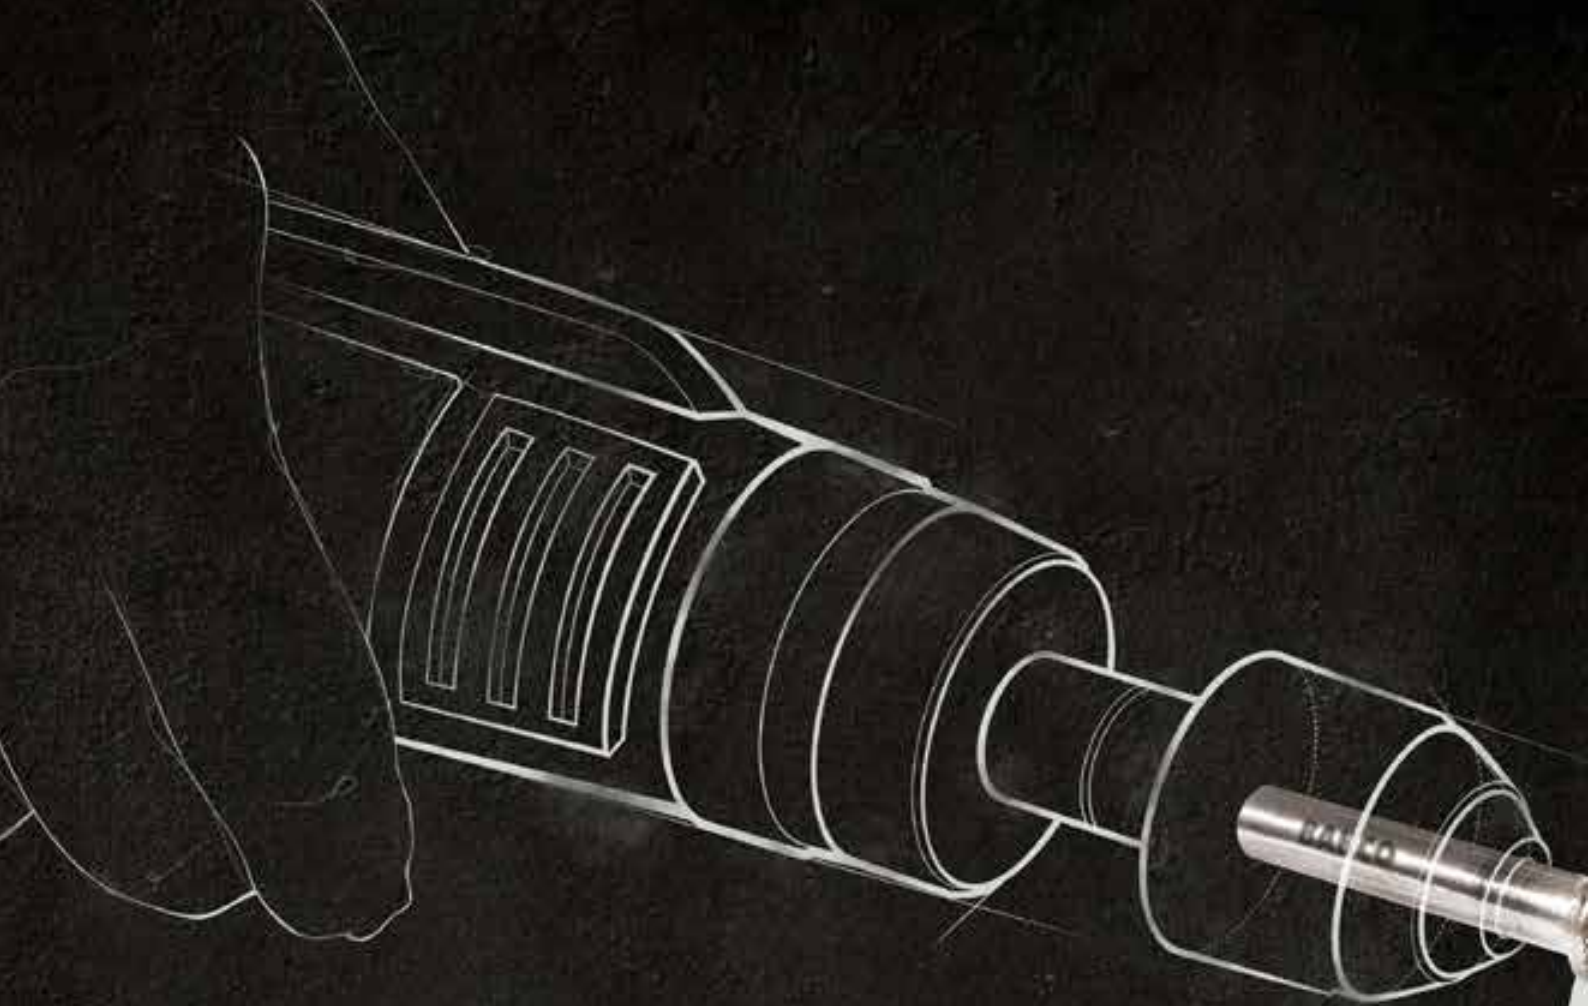

CONSISTENT HIGH PERFORMANCE



**LONG-LIFE, PREMIUM QUALITY
CARBIDE ROTARY BURRS**



**MADE IN OUR
SWEDISH PLANT**



**WIDE RANGE COVERING
ALMOST ALL APPLICATIONS**

FULL OF POWER

Bahco's range of rotary burrs represents the accumulated knowledge of more than 160 years of file production. Drawing on this experience, Bahco has developed and improved the design of this critical product, applying state-of-the-art manufacturing methods to its production. Rigorous quality control is built into the product, from ensuring the highest grade raw material to a finished product that delivers consistent performance.

Our carbide rotary burrs are indispensable in industry sectors such as aviation, shipping, automotive and chemicals. Their application areas include machining cast iron, cast steel, carbon steel, alloy steel, stainless steel, hardened steel, copper and aluminium.

Our high-speed steel (HSS) rotary burrs are primarily used for deburring soft steel, bronze and brass. Our large range of shapes, sizes and fluting styles ensures that you'll find the right burr for your needs.

FULL SUPPORT

CUTTING SPEED RECOMMENDATIONS

To get maximum result out of each rotary burr, we recommend the following cutting speeds (RPM x 1.000).

CARBIDE

| Head diameter |  FE |  18/8 |  Cast iron |  CuZn |  Alu |
|---------------|--|--|---|--|---|
| 3 mm: | 40-80 | 50-90 | 50-90 | 50-100 | 50-100 |
| 6 mm: | 25-60 | 30-60 | 30-60 | 30-70 | 30-70 |
| 8 mm: | 20-45 | 25-50 | 25-50 | 25-50 | 25-50 |
| 10 mm: | 17-40 | 20-40 | 20-40 | 20-40 | 20-40 |
| 12 mm: | 15-30 | 17-30 | 17-30 | 17-35 | 17-35 |
| 16 mm: | 12-25 | 15-25 | 15-25 | 15-30 | 15-30 |






HIGH SPEED STEEL

| Head diameter |  18/8 |  Cast iron |  CuZn |  Alu |
|---------------|--|---|--|---|
| 3 mm: | | | | |
| 6 mm: | 5-20 | 5-20 | 20-40 | 20-40 |
| 8 mm: | | | | |
| 10 mm: | 3-10 | 3-10 | 10-30 | 10-30 |
| 12 mm: | 1-10 | 1-10 | 10-30 | 10-30 |
| 16 mm: | 1-8 | 1-8 | 10-25 | 10-25 |



BURR SELECTION


384
PRODUCTS

| | CARBIDE ROTARY BURRS | CARBIDE ROTARY BURRS FOR ALUMINIUM | HIGH-SPEED STEEL ROTARY BURRS |
|--------------------|--|--|---|
| Range |  3-16 mm (Head Diameter) |  3-16 mm (Head Diameter) |  6-12 mm (Head Diameter) |
| Application |  Made for various industrial applications, like aviation, marine, automotive or chemical. |  Specially designed for deburring aluminium and other soft materials. |  Primarily designed for machining soft steel, aluminium, bronze and brass. |


TYPE OF TOOTHING




Fine
F




Medium
M




Coarse
C




Aluminium
AL



X-cut
X



Diamond-cut
D



End-cut
E



FULL RANGE

PRODUCT IDENTIFICATION SYSTEM

PRODUCT CODE

| | | |
|-----------|---------------------|-------------------|
| E | Type of cut | (E = End-Cut) |
| 03 | Burr shank diameter | (3 mm) |
| F | Type of tothing | (F = Fine) |
| 13 | Burr head length | (13 mm) |
| 03 | Burr head diameter | (3 mm) |
| A | Burr head shape | (A = Cylindrical) |



A = Cylindrical



C = Cylindrical round nose



D = Spherical



E = Oval



F = Tree round nose



CARBIDE ROTARY BURRS

Coarse

A0313C03
A0616C06
A0820C06
A1020C06
A1225C06
A1225C08
A1625C06
A1625C08

C0313C03
C0616C06
C0820C06
C1020C06
C1225C06
C1225C08
C1625C06
C1625C08

D0303C03
D0606C06
D0807C06
D1009C06
D1211C06
D1614C06
D1614C08

E0308C03
E0614C06
E0816C06
E1018C06
E1222C06
E1222C08
E1625C06
E1625C08

F0313C03
F0612C04
F0618C06
F0820C06
F1020C06
F1225C06
F1225C08
F1625C06
F1625C08

Medium

A0313M03
A0313M03E
A0313M03X
A0313M03XE
A0313M03XE-60
A0313M03XE-80
A0613M03X
A0616M06
A0616M06DE
A0616M06E
A0616M06X
A0616M06XE
A0820M06
A0820M06E
A0820M06X
A0820M06XE
A1020M06
A1020M06E
A1020M06X

A1020M06XE
A1040M06X
A1050M06X
A1225M06
A1225M06DE
A1225M06E
A1225M06X
A1225M06XE
A1225M08
A1225M08E
A1225M08X
A1225M08XE
A1625M06
A1625M06X
A1625M06XE
A1625M08
A1625M08E
A1625M08X
A1625M08XE

C0313M03
C0313M03X
C0613M03X
C0616M03X
C0616M06
C0616M06D
C0616M06X
C0820M06
C0820M06X
C1020M06
C1020M06X
C1225M06
C1225M06X
C1225M08
C1225M08X
C1625M06
C1625M06X
C1625M08
C1625M08X

D0303M03
D0303M03X
D0605M03X
D0606M06
D0606M06X
D0807M06
D0807M06X
D1009M06
D1009M06X
D1211M06
D1211M06X
D1614M06
D1614M06X
D1614M08
D1614M08X

E0308M03
E0308M03X
E0614M06
E0816M06
E0816M06X
E1018M06
E1018M06X
E1222M06
E1222M08
E1222M08X
E1625M06
E1625M06X
E1625M08
E1625M08X

F0313M03
F0313M03X
F0612M04
F0612M04X
F0613M03X
F0618M06
F0618M06X
F0820M06
F0820M06X
F1020M06
F1020M06X
F1225M06
F1225M06X
F1225M08
F1225M08X
F1625M06
F1625M06X
F1625M08
F1625M08X

Fine

A0313F03
A0313F03E
A0616F06
A0820F06
A0820F06E
A1020F06
A1225F06
A1225F06E
A1225F08
A1625F06
A1625F08

C0313F03
C0616F06
C0820F06
C1020F06
C1225F06
C1225F08
C1625F06
C1625F08

D0303F03
D0606F06
D0807F06
D1009F06
D1211F06
D1211F06D
D1614F06
D1614F08

E0308F03
E0614F06
E0816F06
E1018F06
E1222F06
E1222F08
E1625F06
E1625F08

F0313F03
F0612F04
F0618F06
F0820F06
F1020F06
F1225F06
F1225F08
F1625F06
F1625F08

CARBIDE ROTARY BURRS FOR ALUMINIUM

A0616AL06E
A1225AL06E
A1225AL08E

C0616AL06
C1225AL06
C1225AL08

D1211AL06
D1211AL08

F0618AL06
F1225AL06
F1225AL08

HIGH-SPEED STEEL ROTARY BURRS

Extra Coarse

HSSG-A1225EC

HSSG-C1225EC

HSSG-D1211EC

HSSG-E1222EC

Medium

HSSG-A0616M
HSSG-A1020M
HSSG-A1225M

HSSG-C0616M
HSSG-C1020M
HSSG-C1225M

HSSG-D0606M
HSSG-D0807M
HSSG-D1009M
HSSG-D1211M

HSSG-E0614M
HSSG-E1222M

HSSG-F0618M
HSSG-F1225M

ADAPT TO EACH SITUATION FOR MAXIMUM RESULTS



G = Arch pointed nose



H = Flame



J = 60° cone



K = 90° cone



L = Conical round nose



M = Conical pointed nose



N = Inverted cone



G0313C03
G0618C06
G0820C06
G1020C06
G1225C06
G1225C08
G1625C06
G1625C08

H1025C06
H1635C06
H1635C08

J0604C06
J1010C06
J1616C06
J1616C08

K0602C06
K1008C06
K1210C06
K1612C06
K1612C08

L1020C06
L1230C06
L1630C06
L1630C08

M0310C03
M0618C06
M1022C06
M1227C06
M1227C08
M1630C06
M1630C08

N0306C03
N0607C06
N1213C06
N1613C06
N1613C08

G0313M03
G0313M03X
G0618M03X
G0618M06
G0618M06X
G0820M06
G0820M06X
G1020M06
G1020M06X
G1225M06
G1225M06X
G1225M08
G1225M08X
G1625M06
G1625M06X
G1625M08
G1625M08X

H0613M03X
H1025M06
H1025M08
H1025M06X
H1232M06
H1232M06X
H1635M06X
H1635M06
H1635M08
H1635M08X

J0604M06
J1010M06
J1212M06
J1616M06
J1616M08

K0602M06
K1008M06
K1210M06
K1612M06
K1612M08

L1020M06
L1020M06X
L1225M06
L1225M06X
L1230M06
L1230M06X
L1630M06
L1630M06X
L1630M08
L1630M08X

M0310M03
M0310M03X
M0618M03X
M0618M06
M0618M06X
M1022M06
M1022M06D
M1022M06X
M1227M06
M1227M06X
M1227M08
M1227M08X
M1630M06
M1630M06X
M1630M08
M1630M08X

N0306M03
N0306M03E
N0607M06
N0607M06E
N1213M06
N1213M06E
N1613M06
N1613M06E
N1613M06X
N1613M08
N1613M08E

G0313F03
G0618F06
G0820F06
G1020F06
G1225F06
G1225F08
G1625F06
G1625F08

H1025F06
H1635F06
H1635F08

J0604F06
J1010F06
J1616F06
J1616F08

K0602F06
K1008F06
K1210F06
K1612F06
K1612F08

L1020F06
L1225F06
L1230F06
L1630F06
L1630F08

M0310F03
M0618F06
M1022F06
M1227F06
M1227F08
M1630F06
M1630F08

N0306F03
N0607F06
N1213F06
N1613F06
N1613F08

L1230AL06
L1230AL08

HSSG-G1225EC

HSSG-G0618M
HSSG-G1220M
HSSG-G1225M

HSSG-M0618M
HSSG-M1227M

CARBIDE ROTARY BURRS



351 PRODUCTS



LARGE RANGE OF
ISO-STANDARD HEAD SHAPES




CONSISTENT CUTTING PERFORMANCE
ALL AROUND THE BURR HEAD

STRONG SHANK CAN HANDLE SPEEDS
FROM 1,000 UP TO 100,000 RPM

MADE OF POWERFUL
LONG-LASTING CARBIDE

A CARBIDE ROTARY BURRS WITH CYLINDRICAL HEAD



FEATURES:

- DIN: ZYA
- Deburring of edges and plane surfaces

- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes

ASSORTMENT


| | | | | | A | B | C | D | | | | |
|---------------|---------------|---|---|---|----|---|----|------|-------|---|----|--|
| A0313C03 | 7311518023713 | 1 | 1 | 3 | 13 | 3 | 40 | C | 14 | x | 10 | |
| A0313F03 | 7311518023690 | 1 | 1 | 3 | 13 | 3 | 40 | F | 18 | x | 10 | |
| A0313F03E | 7311518212780 | 1 | 1 | 3 | 13 | 3 | 40 | F* | 18 | | 10 | |
| A0313M03 | 7311518023706 | 1 | 1 | 3 | 13 | 3 | 40 | M | 14 | x | 10 | |
| A0313M03E | 7311518192150 | 1 | 1 | 3 | 13 | 3 | 40 | M* | 14 | | 10 | |
| A0313M03X | 7311518182038 | 1 | 1 | 3 | 13 | 3 | 40 | M | 14,7 | x | 10 | |
| A0313M03XE | 7311518181475 | 1 | 1 | 3 | 13 | 3 | 40 | M XE | 14,7 | x | 10 | |
| A0313M03XE-60 | 7311518184513 | 1 | 1 | 3 | 13 | 3 | 60 | M* | 14,7 | | 15 | |
| A0313M03XE-80 | 7311518201357 | 1 | 1 | 3 | 13 | 3 | 80 | M | 14,7 | x | 15 | |
| A0613M03X | 7311518197872 | 1 | 1 | 6 | 13 | 3 | 48 | M X | 16,8 | x | 15 | |
| A0616C06 | 7311518023782 | 1 | 1 | 6 | 16 | 6 | 50 | C | 10 | x | 20 | |
| A0616F06 | 7311518023720 | 1 | 1 | 6 | 16 | 6 | 50 | F | 24 | x | 20 | |
| A0616M06 | 7311518023737 | 1 | 1 | 6 | 16 | 6 | 50 | M | 16 | x | 20 | |
| A0616M06DE | 7311518212629 | 1 | 1 | 6 | 16 | 6 | 50 | M* | 16,16 | | 20 | |
| A0616M06E | 7311518023751 | 1 | 1 | 6 | 16 | 6 | 50 | M | 18 | x | 20 | |
| A0616M06X | 7311518023768 | 1 | 1 | 6 | 16 | 6 | 50 | M | 16,8 | x | 20 | |
| A0616M06XE | 7311518181468 | 1 | 1 | 6 | 16 | 6 | 50 | M | 16,8 | x | 20 | |
| A0820F06 | 7311518023799 | 1 | 1 | 8 | 20 | 6 | 60 | F | 28 | | 30 | |

| | | | | | A | B | C | D | | | | |
|------------|---------------|---|---|----|----|---|----|----|-------|---|----|--|
| A0820F06E | 7311518212803 | 1 | 1 | 8 | 20 | 6 | 60 | F* | 28 | | 30 | |
| A0820M06 | 7311518023805 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18 | x | 30 | |
| A0820M06E | 7311518023829 | 1 | 1 | 8 | 20 | 6 | 60 | M* | 18 | | 30 | |
| A0820M06X | 7311518023836 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18,9 | x | 30 | |
| A0820M06XE | 7311518181994 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18,9 | x | 30 | |
| A0820C06 | 7311518023850 | 1 | 1 | 8 | 20 | 6 | 60 | C* | 12 | | 30 | |
| A1020F06 | 7311518023867 | 1 | 1 | 10 | 20 | 6 | 60 | F* | 32 | | 30 | |
| A1020M06 | 7311518023874 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20 | x | 30 | |
| A1020M06E | 7311518023898 | 1 | 1 | 10 | 20 | 6 | 60 | M* | 20 | | 30 | |
| A1020M06X | 7311518023904 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20,10 | x | 30 | |
| A1020M06XE | 7311518182007 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20,10 | x | 30 | |
| A1020C06 | 7311518023928 | 1 | 1 | 10 | 20 | 6 | 60 | C* | 14 | | 30 | |
| A1040M06X | 7311518233129 | 1 | 1 | 10 | 40 | 6 | 60 | x* | 20,10 | | 55 | |
| A1050M06X | 7311518233136 | 1 | 1 | 10 | 50 | 6 | 60 | x* | 20,10 | | 65 | |
| A1225F06 | 7311518023935 | 1 | 1 | 12 | 25 | 6 | 65 | F* | 36 | | 50 | |
| A1225F06E | 7311518212810 | 1 | 1 | 12 | 25 | 6 | 65 | F* | 36 | | 50 | |
| A1225M06 | 7311518023942 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24 | x | 50 | |
| A1225M06DE | 7311518212636 | 1 | 1 | 12 | 25 | 6 | 65 | M* | 24,24 | | 50 | |

| A1225M06E | 7311518023966 | 1 | 1 | 12 | 25 | 6 | 65 | M* | 24 | | 50 |
|------------|---------------|---|---|----|----|---|----|----|--------|---|----|
| A1225M06X | 7311518023973 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24, 12 | x | 50 |
| A1225M06XE | 7311518182014 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24, 12 | x | 50 |
| A1225C06 | 7311518023997 | 1 | 1 | 12 | 25 | 6 | 65 | C | 16 | x | 50 |
| A1225F08 | 7311518024000 | 1 | 1 | 12 | 25 | 8 | 65 | F* | 36 | | 55 |
| A1225M08 | 7311518100506 | 1 | 1 | 12 | 25 | 8 | 65 | M | 24 | x | 55 |
| A1225M08E | 7311518100520 | 1 | 1 | 12 | 25 | 8 | 65 | M* | 24 | | 55 |
| A1225M08X | 7311518187989 | 1 | 1 | 12 | 25 | 8 | 65 | M* | 24 | | 55 |
| A1225M08XE | 7311518192174 | 1 | 1 | 12 | 25 | 8 | 65 | M* | 24, 12 | | 55 |
| A1225C08 | 7311518100544 | 1 | 1 | 12 | 25 | 8 | 65 | C* | 16 | | 55 |
| A1625F06 | 7311518192198 | 1 | 1 | 16 | 25 | 6 | 65 | F* | 40 | | 70 |

| A1625M06 | 7311518192181 | 1 | 1 | 16 | 25 | 6 | 65 | M* | 28 | | 70 |
|------------|---------------|---|---|----|----|---|----|----|--------|---|----|
| A1625M06X | 7311518187361 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28 | x | 70 |
| A1625M06XE | 7311518187354 | 1 | 1 | 16 | 25 | 6 | 65 | M* | 28, 14 | | 70 |
| A1625C06 | 7311518192204 | 1 | 1 | 16 | 25 | 6 | 65 | C* | 18 | | 70 |
| A1625F08 | 7311518100551 | 1 | 1 | 16 | 25 | 8 | 65 | F* | 40 | | 70 |
| A1625M08 | 7311518100568 | 1 | 1 | 16 | 25 | 8 | 65 | M | 28 | x | 70 |
| A1625M08E | 7311518100582 | 1 | 1 | 16 | 25 | 8 | 65 | M* | 28 | | 70 |
| A1625M08X | 7311518100599 | 1 | 1 | 16 | 25 | 8 | 65 | M | 28, 14 | x | 70 |
| A1625M08XE | 7311518182021 | 1 | 1 | 16 | 25 | 8 | 65 | M | 28, 14 | x | 70 |
| A1625C08 | 7311518100612 | 1 | 1 | 16 | 25 | 8 | 65 | C* | 18 | | 70 |

C CARBIDE ROTARY BURRS WITH CYLINDRICAL ROUND NOSE HEAD



FEATURES:

- DIN: WRC
- Deburring of surfaces with round edges and surfaces

- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes


ASSORTMENT

| C0313C03 | 7311518100643 | 1 | 1 | 3 | 13 | 3 | 40 | C | 10 | x | 10 |
|-----------|---------------|---|---|----|----|---|----|----|--------|---|----|
| C0313F03 | 7311518100629 | 1 | 1 | 3 | 13 | 3 | 40 | F | 18 | x | 10 |
| C0313M03 | 7311518100636 | 1 | 1 | 3 | 13 | 3 | 40 | M | 14 | x | 10 |
| C0313M03X | 7311518182045 | 1 | 1 | 3 | 13 | 3 | 40 | M | 14, 7 | x | 10 |
| C0613M03X | 7311518197889 | 1 | 1 | 6 | 13 | 3 | 48 | M | 16, 8 | x | 15 |
| C0616C06 | 7311518100698 | 1 | 1 | 6 | 16 | 6 | 50 | C | 10 | x | 20 |
| C0616F06 | 7311518100650 | 1 | 1 | 6 | 16 | 6 | 50 | F | 24 | x | 20 |
| C0616M03X | 7311518204679 | 1 | 1 | 6 | 16 | 3 | 53 | M | 16, 8 | x | 20 |
| C0616M06 | 7311518100667 | 1 | 1 | 6 | 16 | 6 | 50 | M | 16 | x | 20 |
| C0616M06D | 7311518215262 | 1 | 1 | 6 | 16 | 6 | 50 | M* | 16, 16 | | 20 |
| C0616M06X | 7311518100681 | 1 | 1 | 6 | 16 | 6 | 50 | M | 16, 8 | x | 20 |
| C0820F06 | 7311518100704 | 1 | 1 | 8 | 20 | 6 | 60 | F | 32 | x | 30 |
| C0820M06 | 7311518100711 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18 | x | 30 |
| C0820M06X | 7311518100735 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18, 9 | x | 30 |
| C0820C06 | 7311518100742 | 1 | 1 | 8 | 20 | 6 | 60 | C* | 12 | | 30 |
| C1020F06 | 7311518100759 | 1 | 1 | 10 | 20 | 6 | 60 | F* | 32 | | 30 |
| C1020M06 | 7311518100766 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20 | x | 30 |
| C1020M06X | 7311518100780 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20, 10 | x | 30 |

| C1020C06 | 7311518100797 | 1 | 1 | 10 | 20 | 6 | 60 | C | 14 | x | 30 |
|-----------|---------------|---|---|----|----|---|----|----|--------|---|----|
| C1225F06 | 7311518100803 | 1 | 1 | 12 | 25 | 6 | 65 | F | 32 | x | 50 |
| C1225M06 | 7311518100810 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24 | x | 50 |
| C1225M06X | 7311518100834 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24, 12 | x | 50 |
| C1225C06 | 7311518100841 | 1 | 1 | 12 | 25 | 6 | 65 | C | 16 | x | 50 |
| C1225F08 | 7311518100858 | 1 | 1 | 12 | 25 | 8 | 65 | F* | 36 | | 55 |
| C1225M08 | 7311518100865 | 1 | 1 | 12 | 25 | 8 | 65 | M | 24 | x | 55 |
| C1225M08X | 7311518187996 | 1 | 1 | 12 | 25 | 8 | 65 | M | 24, 12 | x | 55 |
| C1225C08 | 7311518100889 | 1 | 1 | 12 | 25 | 8 | 65 | C* | 16 | | 55 |
| C1625F06 | 7311518192259 | 1 | 1 | 16 | 25 | 6 | 65 | F* | 40 | | 70 |
| C1625M06 | 7311518192266 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28 | x | 70 |
| C1625M06X | 7311518187378 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28, 14 | x | 70 |
| C1625C06 | 7311518192273 | 1 | 1 | 16 | 25 | 6 | 65 | C* | 18 | | 70 |
| C1625F08 | 7311518100896 | 1 | 1 | 16 | 25 | 8 | 65 | F* | 40 | | 70 |
| C1625M08 | 7311518100902 | 1 | 1 | 16 | 25 | 8 | 65 | M | 28 | x | 70 |
| C1625M08X | 7311518100926 | 1 | 1 | 16 | 25 | 8 | 65 | M | 28, 14 | x | 70 |
| C1625C08 | 7311518100933 | 1 | 1 | 16 | 25 | 8 | 65 | C* | 18 | | 70 |

D

CARBIDE ROTARY BURRS WITH SPHERICAL HEAD



FEATURES:

- DIN: KUD
- Deburring of welds and holes. To make oil canals in narrow places

- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|---|---|----|----|------|---|----|--|
| D0303F03 | 7311518100940 | 1 | 1 | 3 | 3 | 3 | 40 | F | 18 | x | 10 | |
| D0303M03 | 7311518100957 | 1 | 1 | 3 | 3 | 3 | 40 | M | 14 | x | 10 | |
| D0303M03X | 7311518182052 | 1 | 1 | 3 | 3 | 3 | 40 | M | 14,7 | x | 10 | |
| D0303C03 | 7311518100964 | 1 | 1 | 3 | 3 | 3 | 40 | C* | 10 | | 10 | |
| D0605M03X | 7311518197896 | 1 | 1 | 6 | 5 | 3 | 40 | M | 16,8 | x | 15 | |
| D0606F06 | 7311518100971 | 1 | 1 | 6 | 6 | 6 | 50 | F* | 24 | | 20 | |
| D0606M06 | 7311518100988 | 1 | 1 | 6 | 6 | 6 | 50 | M | 16 | x | 20 | |
| D0606M06X | 7311518101008 | 1 | 1 | 6 | 6 | 6 | 50 | M | 16,8 | x | 20 | |
| D0606C06 | 7311518043872 | 1 | 1 | 6 | 6 | 6 | 50 | C | 12 | x | 20 | |
| D0807F06 | 7311518043889 | 1 | 1 | 8 | 7 | 6 | 47 | F* | 28 | | 20 | |
| D0807M06 | 7311518043896 | 1 | 1 | 8 | 7 | 6 | 47 | M | 18 | x | 20 | |
| D0807M06X | 7311518043919 | 1 | 1 | 8 | 7 | 6 | 47 | M | 18,9 | x | 20 | |
| D0807C06 | 7311518043933 | 1 | 1 | 8 | 7 | 6 | 47 | C* | 14 | | 20 | |
| D1009F06 | 7311518043926 | 1 | 1 | 10 | 9 | 6 | 49 | F* | 32 | | 20 | |
| D1009M06 | 7311518035280 | 1 | 1 | 10 | 9 | 6 | 49 | M | 20 | x | 20 | |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|----|--|
| D1009M06X | 7311518035297 | 1 | 1 | 10 | 9 | 6 | 49 | M | 20,10 | x | 20 | |
| D1009C06 | 7311518035310 | 1 | 1 | 10 | 9 | 6 | 49 | C | 14 | x | 20 | |
| D1211F06 | 7311518035327 | 1 | 1 | 12 | 11 | 6 | 51 | F | 36 | x | 30 | |
| D1211F06D | 7311518266424 | 1 | 1 | 12 | 11 | 6 | 51 | D* | 36 | | 30 | |
| D1211M06 | 7311518035334 | 1 | 1 | 12 | 11 | 6 | 51 | M | 24 | x | 30 | |
| D1211M06X | 7311518035358 | 1 | 1 | 12 | 11 | 6 | 51 | M | 24,12 | x | 30 | |
| D1211C06 | 7311518035365 | 1 | 1 | 12 | 11 | 6 | 51 | C | 16 | x | 30 | |
| D1614F06 | 7311518192334 | 1 | 1 | 16 | 14 | 6 | 54 | F* | 40 | | 50 | |
| D1614M06 | 7311518192327 | 1 | 1 | 16 | 14 | 6 | 54 | M | 28 | x | 50 | |
| D1614M06X | 7311518187385 | 1 | 1 | 16 | 14 | 6 | 54 | M | 28,14 | x | 50 | |
| D1614C06 | 7311518192341 | 1 | 1 | 16 | 14 | 6 | 54 | C* | 18 | | 50 | |
| D1614F08 | 7311518035372 | 1 | 1 | 16 | 14 | 8 | 54 | F* | 40 | | 50 | |
| D1614M08 | 7311518035389 | 1 | 1 | 16 | 14 | 8 | 54 | M* | 28 | | 50 | |
| D1614M08X | 7311518035402 | 1 | 1 | 16 | 14 | 8 | 54 | M* | 28,14 | | 50 | |
| D1614C08 | 7311518035419 | 1 | 1 | 16 | 14 | 8 | 65 | C* | 18 | | 50 | |

E

CARBIDE ROTARY BURRS WITH OVAL HEAD



FEATURES:

- DIN: TRE
- Shaping and deburring in, for example, cylinder blocks and tools with complicated forms

- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes

ASSORTMENT

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|---|----|---|----|----|------|---|----|--|
| E0308F03 | 7311518035426 | 1 | 1 | 3 | 8 | 3 | 40 | F* | 18 | | 10 | |
| E0308M03 | 7311518035433 | 1 | 1 | 3 | 8 | 3 | 40 | M | 14 | x | 10 | |
| E0308M03X | 7311518192372 | 1 | 1 | 3 | 8 | 3 | 40 | M* | 14,7 | | 10 | |
| E0308C03 | 7311518035440 | 1 | 1 | 3 | 8 | 3 | 40 | C* | 10 | | 10 | |
| E0614F06 | 7311518035457 | 1 | 1 | 6 | 14 | 6 | 50 | F* | 24 | | 20 | |
| E0614M06 | 7311518035464 | 1 | 1 | 6 | 14 | 6 | 50 | M | 16 | x | 20 | |
| E0614C06 | 7311518035495 | 1 | 1 | 6 | 14 | 6 | 50 | C* | 12 | | 20 | |
| E0816F06 | 7311518035501 | 1 | 1 | 8 | 16 | 6 | 60 | F* | 24 | | 30 | |
| E0816M06 | 7311518035518 | 1 | 1 | 8 | 16 | 6 | 60 | M | 18 | x | 30 | |
| E0816M06X | 7311518035532 | 1 | 1 | 8 | 16 | 6 | 60 | M | 18,9 | x | 30 | |


| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|----|--|
| E0816C06 | 7311518035549 | 1 | 1 | 8 | 16 | 6 | 60 | C* | 12 | | 30 | |
| E1018F06 | 7311518035556 | 1 | 1 | 10 | 18 | 6 | 60 | F* | 32 | | 30 | |
| E1018M06 | 7311518035563 | 1 | 1 | 10 | 18 | 6 | 60 | M | 20 | x | 30 | |
| E1018M06X | 7311518035587 | 1 | 1 | 10 | 18 | 6 | 60 | M | 20,10 | x | 30 | |
| E1018C06 | 7311518035594 | 1 | 1 | 10 | 18 | 6 | 60 | C* | 14 | | 30 | |
| E1222F06 | 7311518035600 | 1 | 1 | 12 | 22 | 6 | 60 | F* | 36 | | 40 | |
| E1222M06 | 7311518035617 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24 | x | 40 | |
| E1222M06X | 7311518035631 | 1 | 1 | 12 | 22 | 6 | 65 | M | 24,12 | x | 40 | |
| E1222C06 | 7311518035648 | 1 | 1 | 12 | 22 | 6 | 60 | C* | 16 | | 40 | |
| E1222F08 | 7311518035655 | 1 | 1 | 12 | 22 | 8 | 65 | F* | 36 | | 40 | |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|--------|---|----|--|
| E1222M08 | 7311518172558 | 1 | 1 | 12 | 22 | 8 | 65 | M* | 24 | | 40 | |
| E1222M08X | 7311518199302 | 1 | 1 | 12 | 22 | 8 | 65 | M* | 24, 12 | | 40 | |
| E1222C08 | 7311518035686 | 1 | 1 | 12 | 22 | 8 | 65 | C* | 16 | | 40 | |
| E1625F06 | 7311518192457 | 1 | 1 | 16 | 25 | 6 | 65 | F* | 40 | | 70 | |
| E1625M06 | 7311518192440 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28 | x | 70 | |
| E1625M06X | 7311518187392 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28, 14 | x | 70 | |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|--------|---|----|--|
| E1625C06 | 7311518192464 | 1 | 1 | 16 | 25 | 6 | 65 | C* | 18 | | 70 | |
| E1625F08 | 7311518035693 | 1 | 1 | 16 | 25 | 8 | 65 | F* | 40 | | 70 | |
| E1625M08 | 7311518035709 | 1 | 1 | 16 | 25 | 8 | 65 | M* | 28 | | 70 | |
| E1625M08X | 7311518035723 | 1 | 1 | 16 | 25 | 8 | 65 | M | 28, 14 | x | 70 | |
| E1625C08 | 7311518035730 | 1 | 1 | 16 | 25 | 8 | 65 | C* | 16 | | 70 | |

F

CARBIDE ROTARY BURRS WITH ROUND NOSE TREE HEAD



FEATURES:

- DIN: TRE
- Shaping and deburring in, for example, cylinder blocks and tools with complicated forms
- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|----|--|
| F0313F03 | 7311518035747 | 1 | 1 | 3 | 13 | 3 | 40 | F | 24 | x | 15 | |
| F0313M03 | 7311518035754 | 1 | 1 | 3 | 13 | 3 | 40 | M | 14 | x | 15 | |
| F0313M03X | 7311518192495 | 1 | 1 | 3 | 13 | 3 | 40 | M | 14, 7 | x | 15 | |
| F0313C03 | 7311518035761 | 1 | 1 | 3 | 13 | 3 | 40 | C* | 10 | | 15 | |
| F0612F04 | 7311518192518 | 1 | 1 | 6 | 12 | 4 | 45 | F* | 24 | | 10 | |
| F0612M04 | 7311518035778 | 1 | 1 | 6 | 12 | 4 | 45 | M* | 16 | | 10 | |
| F0612M04X | 7311518188474 | 1 | 1 | 6 | 12 | 4 | 45 | M* | 16, 8 | | 10 | |
| F0612C04 | 7311518192525 | 1 | 1 | 6 | 12 | 4 | 45 | C* | 10 | | 10 | |
| F0613M03X | 7311518196608 | 1 | 1 | 6 | 13 | 3 | 48 | M | 16, 8 | x | 10 | |
| F0618F06 | 7311518035785 | 1 | 1 | 6 | 18 | 6 | 50 | F* | 24 | | 20 | |
| F0618M06 | 7311518035792 | 1 | 1 | 6 | 18 | 6 | 50 | M | 16 | x | 20 | |
| F0618M06X | 7311518035815 | 1 | 1 | 6 | 18 | 6 | 50 | M | 16, 8 | x | 20 | |
| F0618C06 | 7311518035822 | 1 | 1 | 6 | 18 | 6 | 50 | C | 10 | x | 20 | |
| F0820F06 | 7311518035846 | 1 | 1 | 8 | 20 | 6 | 60 | F* | 28 | | 30 | |
| F0820M06 | 7311518035839 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18 | x | 30 | |
| F0820M06X | 7311518035860 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18, 9 | x | 30 | |
| F0820C06 | 7311518035877 | 1 | 1 | 8 | 20 | 6 | 60 | C* | 12 | | 30 | |
| F1020F06 | 7311518035884 | 1 | 1 | 10 | 20 | 6 | 60 | F* | 32 | | 30 | |
| F1020M06 | 7311518035891 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20 | x | 30 | |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|--------|---|----|--|
| F1020M06X | 7311518035914 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20, 10 | x | 30 | |
| F1020C06 | 7311518035921 | 1 | 1 | 10 | 20 | 6 | 60 | C* | 14 | | 30 | |
| F1225F06 | 7311518035938 | 1 | 1 | 12 | 25 | 6 | 65 | F | 36 | x | 40 | |
| F1225M06 | 7311518035945 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24 | x | 40 | |
| F1225M06X | 7311518036003 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24, 12 | x | 40 | |
| F1225C06 | 7311518035969 | 1 | 1 | 12 | 25 | 6 | 65 | C | 16 | x | 40 | |
| F1225F08 | 7311518035976 | 1 | 1 | 12 | 25 | 8 | 65 | F* | 36 | | 45 | |
| F1225M08 | 7311518035983 | 1 | 1 | 12 | 25 | 8 | 65 | M | 24 | x | 45 | |
| F1225M08X | 7311518192563 | 1 | 1 | 12 | 25 | 8 | 65 | M | 24, 12 | x | 45 | |
| F1225C08 | 7311518036010 | 1 | 1 | 12 | 25 | 8 | 65 | C* | 16 | | 45 | |
| F1625F06 | 7311518192587 | 1 | 1 | 16 | 25 | 6 | 65 | F* | 40 | | 70 | |
| F1625M06 | 7311518192570 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28 | x | 70 | |
| F1625M06X | 7311518187408 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28, 14 | x | 70 | |
| F1625C06 | 7311518192594 | 1 | 1 | 16 | 25 | 6 | 65 | C* | 18 | | 70 | |
| F1625F08 | 7311518036027 | 1 | 1 | 16 | 25 | 8 | 65 | F* | 40 | | 70 | |
| F1625M08 | 7311518036034 | 1 | 1 | 16 | 25 | 8 | 65 | M* | 28 | | 70 | |
| F1625M08X | 7311518036058 | 1 | 1 | 16 | 25 | 8 | 65 | M* | 28, 14 | | 70 | |
| F1625C08 | 7311518036065 | 1 | 1 | 16 | 25 | 8 | 65 | C* | 18 | | 70 | |

G

CARBIDE ROTARY BURRS WITH POINTED TREE HEAD



FEATURES:

- DIN: SPG
- Is useful in confined spaces due to the pointed nose

- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|----|--|--|
| G0313F03 | 7311518036072 | 1 | 1 | 3 | 13 | 3 | 40 | F | 18 | x | 10 | | |
| G0313M03 | 7311518036089 | 1 | 1 | 3 | 13 | 3 | 40 | M | 14 | x | 10 | | |
| G0313M03X | 7311518182069 | 1 | 1 | 3 | 13 | 3 | 40 | M | 14,7 | x | 10 | | |
| G0313C03 | 7311518036096 | 1 | 1 | 3 | 13 | 3 | 40 | C | 12 | x | 10 | | |
| G0613M03X | 7311518196592 | 1 | 1 | 6 | 13 | 3 | 48 | M | 16,8 | x | 15 | | |
| G0618F06 | 7311518036102 | 1 | 1 | 6 | 18 | 6 | 50 | F | 24 | x | 20 | | |
| G0618M06 | 7311518036119 | 1 | 1 | 6 | 18 | 6 | 50 | M | 16 | x | 20 | | |
| G0618M06X | 7311518036133 | 1 | 1 | 6 | 18 | 6 | 50 | M | 16,8 | x | 20 | | |
| G0618C06 | 7311518036140 | 1 | 1 | 6 | 18 | 6 | 50 | C | 10 | x | 20 | | |
| G0820F06 | 7311518036157 | 1 | 1 | 8 | 20 | 6 | 60 | F* | 28 | | 30 | | |
| G0820M06 | 7311518036164 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18 | x | 30 | | |
| G0820M06X | 7311518036188 | 1 | 1 | 8 | 20 | 6 | 60 | M | 18,9 | x | 30 | | |
| G0820C06 | 7311518172572 | 1 | 1 | 8 | 20 | 6 | 60 | C* | 12 | | 30 | | |
| G1020F06 | 7311518036201 | 1 | 1 | 10 | 20 | 6 | 60 | F* | 32 | | 30 | | |
| G1020M06 | 7311518036218 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20 | x | 30 | | |
| G1020M06X | 7311518036232 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20,10 | x | 30 | | |
| G1020C06 | 7311518036249 | 1 | 1 | 10 | 20 | 6 | 60 | C* | 14 | | 30 | | |

| | | | | | A | B | C | D | | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|----|--|--|
| G1225F06 | 7311518036300 | 1 | 1 | 12 | 25 | 6 | 65 | F | 36 | x | 40 | | |
| G1225M06 | 7311518036317 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24 | x | 40 | | |
| G1225M06X | 7311518036331 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24,12 | x | 40 | | |
| G1225C06 | 7311518036348 | 1 | 1 | 12 | 25 | 6 | 65 | C | 16 | x | 40 | | |
| G1225F08 | 7311518036355 | 1 | 1 | 12 | 25 | 8 | 65 | F* | 36 | | 40 | | |
| G1225M08 | 7311518036362 | 1 | 1 | 12 | 25 | 8 | 65 | M | 24 | x | 40 | | |
| G1225M08X | 7311518188009 | 1 | 1 | 12 | 25 | 8 | 65 | M | 24,12 | x | 40 | | |
| G1225C08 | 7311518036386 | 1 | 1 | 12 | 25 | 8 | 65 | C* | 16 | | 40 | | |
| G1625F06 | 7311518192655 | 1 | 1 | 16 | 25 | 6 | 65 | F* | 40 | | 70 | | |
| G1625M06 | 7311518192648 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28 | x | 70 | | |
| G1625M06X | 7311518187415 | 1 | 1 | 16 | 25 | 6 | 65 | M | 28,14 | x | 70 | | |
| G1625C06 | 7311518192662 | 1 | 1 | 16 | 25 | 6 | 65 | C* | 18 | | 70 | | |
| G1625F08 | 7311518036393 | 1 | 1 | 16 | 25 | 8 | 65 | F* | 40 | | 70 | | |
| G1625M08 | 7311518036409 | 1 | 1 | 16 | 25 | 8 | 65 | M* | 28 | | 70 | | |
| G1625M08X | 7311518036423 | 1 | 1 | 16 | 25 | 8 | 65 | M | 28,14 | x | 70 | | |
| G1625C08 | 7311518036430 | 1 | 1 | 16 | 25 | 8 | 65 | C* | 18 | | 70 | | |

H

CARBIDE ROTARY BURRS WITH FLAME HEAD



FEATURES:

- DIN: FLH
- Deburring of large curved surfaces and inside tubes

- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|----|--|--|
| H0613M03X | 7311518196615 | 1 | 1 | 6 | 13 | 3 | 48 | M | 16,8 | x | 20 | | |
| H1025F06 | 7311518182335 | 1 | 1 | 10 | 25 | 6 | 65 | F* | 32 | | 30 | | |
| H1025M06 | 7311518182304 | 1 | 1 | 10 | 25 | 6 | 65 | M | 20 | x | 30 | | |
| H1025M08 | 7311518273439 | 1 | 1 | 10 | 25 | 8 | 65 | M* | 20 | | 42 | | |
| H1025M06X | 7311518182311 | 1 | 1 | 10 | 25 | 6 | 65 | M | 20,10 | x | 30 | | |
| H1025C06 | 7311518182328 | 1 | 1 | 10 | 25 | 6 | 65 | C* | 14 | | 30 | | |
| H1232M06 | 7311518182076 | 1 | 1 | 12 | 32 | 6 | 72 | M | 24 | x | 40 | | |
| H1232M06X | 7311518181758 | 1 | 1 | 12 | 32 | 6 | 72 | M | 24,12 | x | 40 | | |

| | | | | | A | B | C | D | | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|----|--|--|
| H1635F06 | 7311518192747 | 1 | 1 | 16 | 35 | 6 | 75 | F* | 40 | | 70 | | |
| H1635M06X | 7311518187422 | 1 | 1 | 16 | 35 | 6 | 75 | M | 28,14 | x | 70 | | |
| H1635M06 | 7311518192730 | 1 | 1 | 16 | 35 | 6 | 75 | M* | 28 | | 70 | | |
| H1635C06 | 7311518192754 | 1 | 1 | 16 | 35 | 6 | 75 | C* | 18 | | 70 | | |
| H1635F08 | 7311518192778 | 1 | 1 | 16 | 35 | 8 | 75 | F* | 40 | | 70 | | |
| H1635M08 | 7311518182083 | 1 | 1 | 16 | 35 | 8 | 75 | M* | 28 | | 70 | | |
| H1635M08X | 7311518182090 | 1 | 1 | 16 | 35 | 8 | 75 | M* | 28,14 | | 70 | | |
| H1635C08 | 7311518192785 | 1 | 1 | 16 | 35 | 8 | 75 | C* | 18 | | 70 | | |

J

CARBIDE ROTARY BURRS WITH 60° CONE HEAD



FEATURES:

- DIN: KSJ
- Smoothing edges in 30°
- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes


ASSORTMENT

| | | X | A | B | C | D | | | | | |
|----------|---------------|---|---|----|----|---|----|----|----|---|----|
| J0604F06 | 7311518036492 | 1 | 1 | 6 | 4 | 6 | 55 | F* | 24 | | 20 |
| J0604M06 | 7311518036508 | 1 | 1 | 6 | 4 | 6 | 55 | M | 16 | x | 20 |
| J0604C06 | 7311518036515 | 1 | 1 | 6 | 4 | 6 | 55 | C* | 10 | | 20 |
| J1010F06 | 7311518036522 | 1 | 1 | 10 | 10 | 6 | 50 | F* | 30 | | 25 |
| J1010M06 | 7311518172473 | 1 | 1 | 10 | 10 | 6 | 50 | M | 21 | x | 25 |
| J1010C06 | 7311518036553 | 1 | 1 | 10 | 10 | 6 | 50 | C* | 15 | | 25 |
| J1212M06 | 7311518036577 | 1 | 1 | 12 | 12 | 6 | 52 | M | 24 | x | 30 |

| | | X | A | B | C | D | | | | | |
|----------|---------------|---|---|----|----|---|----|----|----|---|----|
| J1616F06 | 7311518192815 | 1 | 1 | 16 | 16 | 6 | 56 | F* | 39 | | 40 |
| J1616M06 | 7311518187439 | 1 | 1 | 16 | 16 | 6 | 56 | M | 27 | x | 40 |
| J1616C06 | 7311518192822 | 1 | 1 | 16 | 16 | 6 | 56 | C* | 21 | | 40 |
| J1616F08 | 7311518036607 | 1 | 1 | 16 | 16 | 8 | 56 | F* | 39 | | 40 |
| J1616M08 | 7311518036614 | 1 | 1 | 16 | 16 | 8 | 56 | M* | 27 | | 40 |
| J1616C08 | 7311518036638 | 1 | 1 | 16 | 16 | 8 | 56 | C* | 21 | | 40 |

K

CARBIDE ROTARY BURRS WITH 90° CONE HEAD



FEATURES:


- DIN: KSK
- Smoothing edges at 45°
- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes

ASSORTMENT

| | | X | A | B | C | D | | | | | |
|----------|---------------|---|---|----|----|---|----|----|----|---|----|
| K0602F06 | 7311518036645 | 1 | 1 | 6 | 2 | 6 | 55 | F* | 24 | | 20 |
| K0602M06 | 7311518036652 | 1 | 1 | 6 | 2 | 6 | 55 | M | 16 | x | 20 |
| K0602C06 | 7311518036669 | 1 | 1 | 6 | 2 | 6 | 55 | C* | 10 | | 20 |
| K1008F06 | 7311518036676 | 1 | 1 | 10 | 8 | 6 | 48 | F* | 30 | | 30 |
| K1008M06 | 7311518036683 | 1 | 1 | 10 | 8 | 6 | 48 | M | 21 | x | 30 |
| K1008C06 | 7311518036706 | 1 | 1 | 10 | 8 | 6 | 48 | C* | 15 | | 30 |
| K1210F06 | 7311518036713 | 1 | 1 | 12 | 10 | 6 | 50 | F* | 36 | | 30 |
| K1210M06 | 7311518036720 | 1 | 1 | 12 | 10 | 6 | 50 | M | 24 | x | 30 |

| | | X | A | B | C | D | | | | | |
|----------|---------------|---|---|----|----|---|----|----|----|---|----|
| K1210C06 | 7311518036744 | 1 | 1 | 12 | 10 | 6 | 50 | C* | 18 | | 30 |
| K1612F06 | 7311518193966 | 1 | 1 | 16 | 12 | 6 | 52 | F* | 39 | | 40 |
| K1612M06 | 7311518193959 | 1 | 1 | 16 | 12 | 6 | 52 | M* | 27 | | 40 |
| K1612C06 | 7311518193973 | 1 | 1 | 16 | 12 | 6 | 52 | C* | 21 | | 40 |
| K1612M08 | 7311518036768 | 1 | 1 | 16 | 12 | 8 | 52 | M | 27 | x | 40 |
| K1612F08 | 7311518036751 | 1 | 1 | 16 | 12 | 8 | 52 | F* | 39 | | 40 |
| K1612C08 | 7311518036782 | 1 | 1 | 16 | 12 | 8 | 52 | C* | 21 | | 40 |

L CARBIDE ROTARY BURRS WITH ROUND NOSE CONICAL HEAD



FEATURES:

- DIN: KEL
- Long burr head for work in confined spaces with round corners


- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes

ASSORTMENT

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|--|----|
| L1020F06 | 7311518182106 | 1 | 1 | 10 | 20 | 6 | 60 | F* | 32 | | | 30 |
| L1020M06 | 7311518133665 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20 | x | | 30 |
| L1020M06X | 7311518136369 | 1 | 1 | 10 | 20 | 6 | 60 | M | 20,10 | x | | 30 |
| L1020C06 | 7311518182113 | 1 | 1 | 10 | 20 | 6 | 60 | C* | 14 | | | 30 |
| L1225F06 | 7311518192860 | 1 | 1 | 12 | 25 | 6 | 65 | F* | 36 | | | 30 |
| L1225M06 | 7311518132774 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24 | x | | 30 |
| L1225M06X | 7311518136857 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24,12 | x | | 30 |
| L1230F06 | 7311518182137 | 1 | 1 | 12 | 30 | 6 | 70 | F* | 36 | | | 50 |
| L1230M06 | 7311518182168 | 1 | 1 | 12 | 30 | 6 | 70 | M | 24 | x | | 50 |
| L1230M06X | 7311518182175 | 1 | 1 | 12 | 30 | 6 | 70 | M | 24 | x | | 50 |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|--|----|
| L1230C06 | 7311518182120 | 1 | 1 | 12 | 30 | 6 | 70 | C* | 16 | | | 50 |
| L1630F06 | 7311518192921 | 1 | 1 | 16 | 30 | 6 | 70 | F* | 40 | | | 70 |
| L1630M06 | 7311518192914 | 1 | 1 | 16 | 30 | 6 | 70 | M* | 28 | | | 70 |
| L1630M06X | 7311518187446 | 1 | 1 | 16 | 30 | 6 | 70 | M | 28,14 | x | | 70 |
| L1630C06 | 7311518192938 | 1 | 1 | 16 | 30 | 6 | 70 | C* | 18 | | | 70 |
| L1630M08 | 7311518182205 | 1 | 1 | 16 | 30 | 8 | 70 | M | 28 | x | | 70 |
| L1630M08X | 7311518136833 | 1 | 1 | 16 | 30 | 8 | 70 | M | 28,14 | x | | 70 |
| L1630F08 | 7311518182151 | 1 | 1 | 16 | 30 | 8 | 70 | F* | 40 | | | 70 |
| L1630C08 | 7311518182144 | 1 | 1 | 16 | 30 | 8 | 70 | C* | 18 | | | 70 |

M CARBIDE ROTARY BURRS WITH POINTED NOSE CONICAL HEAD



FEATURES:

- DIN: SKM
- Deburring holes and in confined spaces

- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|--|----|
| M0310F03 | 7311518036799 | 1 | 1 | 3 | 10 | 3 | 40 | F | 18 | x | | 10 |
| M0310M03 | 7311518036805 | 1 | 1 | 3 | 10 | 3 | 40 | M | 14 | x | | 10 |
| M0310M03X | 7311518187063 | 1 | 1 | 3 | 10 | 3 | 40 | M | 14,7 | x | | 10 |
| M0310C03 | 7311518036812 | 1 | 1 | 3 | 10 | 3 | 40 | C* | 10 | | | 10 |
| M0613M03X | 7311518196622 | 1 | 1 | 6 | 13 | 3 | 48 | M | 16,8 | x | | 15 |
| M0618F06 | 7311518036829 | 1 | 1 | 6 | 18 | 6 | 50 | F | 30 | x | | 20 |
| M0618M06 | 7311518036836 | 1 | 1 | 6 | 18 | 6 | 50 | M | 16 | x | | 20 |
| M0618M06X | 7311518036850 | 1 | 1 | 6 | 18 | 6 | 50 | M | 16,8 | x | | 20 |
| M0618C06 | 7311518036867 | 1 | 1 | 6 | 18 | 6 | 50 | C | 10 | x | | 20 |
| M1022F06 | 7311518036874 | 1 | 1 | 10 | 20 | 6 | 60 | F* | 36 | | | 30 |
| M1022M06 | 7311518036881 | 1 | 1 | 10 | 20 | 6 | 60 | M | 21 | x | | 30 |
| M1022M06D | 7311518210762 | 1 | 1 | 10 | 20 | 6 | 60 | M* | 21,21 | | | 30 |
| M1022M06X | 7311518036904 | 1 | 1 | 10 | 20 | 6 | 60 | M | 21,11 | x | | 30 |
| M1022C06 | 7311518036911 | 1 | 1 | 10 | 20 | 6 | 60 | C* | 18 | | | 30 |
| M1227F06 | 7311518036935 | 1 | 1 | 12 | 25 | 6 | 65 | F* | 36 | | | 40 |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|-------|---|--|----|
| M1227M06 | 7311518036928 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24 | x | | 40 |
| M1227M06X | 7311518036959 | 1 | 1 | 12 | 25 | 6 | 65 | M | 24,12 | x | | 40 |
| M1227C06 | 7311518036966 | 1 | 1 | 12 | 25 | 6 | 65 | C* | 18 | | | 40 |
| M1227F08 | 7311518036973 | 1 | 1 | 12 | 25 | 8 | 65 | F* | 36 | | | 40 |
| M1227M08 | 7311518036980 | 1 | 1 | 12 | 25 | 8 | 65 | M* | 24 | | | 40 |
| M1227M08X | 7311518192990 | 1 | 1 | 12 | 25 | 8 | 65 | M* | 24,12 | | | 40 |
| M1227C08 | 7311518192983 | 1 | 1 | 12 | 25 | 8 | 65 | C* | 18 | | | 40 |
| M1630F06 | 7311518193027 | 1 | 1 | 16 | 30 | 6 | 70 | F* | 39 | | | 70 |
| M1630M06 | 7311518193010 | 1 | 1 | 16 | 30 | 6 | 70 | M | 27 | x | | 70 |
| M1630M06X | 7311518187453 | 1 | 1 | 16 | 30 | 6 | 70 | M | 27,14 | x | | 70 |
| M1630C06 | 7311518193034 | 1 | 1 | 16 | 30 | 6 | 70 | C* | 21 | | | 70 |
| M1630F08 | 7311518037055 | 1 | 1 | 16 | 30 | 8 | 70 | F* | 39 | | | 70 |
| M1630M08 | 7311518037062 | 1 | 1 | 16 | 30 | 8 | 70 | M | 27 | x | | 70 |
| M1630M08X | 7311518037086 | 1 | 1 | 16 | 30 | 8 | 70 | M | 27,14 | x | | 70 |
| M1630C08 | 7311518037093 | 1 | 1 | 16 | 30 | 8 | 70 | C* | 21 | | | 70 |

N

CARBIDE ROTARY BURRS WITH INVERTED CONE HEAD



FEATURES:

- DIN: WKN
- Deburring holes and in confined spaces
- Type of cut: F = Fine, M = Medium, C = Coarse
- Stock standard: X = yes

ASSORTMENT

| | | X | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|----|------|
| N0306F03 | 7311518193058 | 1 | 1 | 3 | 6 | 3 | 40 | F* | 18 | 10 |
| N0306M03 | 7311518182212 | 1 | 1 | 3 | 6 | 3 | 40 | M | 14 | x 10 |
| N0306M03E | 7311518182229 | 1 | 1 | 3 | 6 | 3 | 40 | M* | 14 | 10 |
| N0306C03 | 7311518193065 | 1 | 1 | 3 | 6 | 3 | 40 | C* | 10 | 10 |
| N0607F06 | 7311518193072 | 1 | 1 | 6 | 7 | 6 | 50 | F* | 24 | 20 |
| N0607M06 | 7311518182236 | 1 | 1 | 6 | 7 | 6 | 50 | M* | 16 | 20 |
| N0607M06E | 7311518182243 | 1 | 1 | 6 | 7 | 6 | 50 | M* | 24 | 20 |
| N0607C06 | 7311518193089 | 1 | 1 | 6 | 7 | 6 | 50 | C* | 10 | 20 |
| N1213F06 | 7311518193096 | 1 | 1 | 12 | 13 | 6 | 53 | F* | 36 | 30 |
| N1213M06 | 7311518134570 | 1 | 1 | 12 | 13 | 6 | 53 | M | 24 | x 30 |
| N1213M06E | 7311518182250 | 1 | 1 | 12 | 13 | 6 | 53 | M* | 24 | 30 |

| | | X | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|--------|------|
| N1213M06X | 7311518237172 | 1 | 1 | 12 | 13 | 6 | 53 | x | 24 | x 30 |
| N1213C06 | 7311518193102 | 1 | 1 | 12 | 13 | 6 | 53 | C* | 16 | 30 |
| N1613F06 | 7311518193126 | 1 | 1 | 16 | 13 | 6 | 53 | F* | 40 | 50 |
| N1613M06 | 7311518136000 | 1 | 1 | 16 | 13 | 6 | 53 | M* | 28 | 50 |
| N1613M06E | 7311518193119 | 1 | 1 | 16 | 13 | 6 | 53 | M* | 28 | 50 |
| N1613M06X | 7311518204525 | 1 | 1 | 16 | 13 | 6 | 53 | M* | 28, 14 | 50 |
| N1613C06 | 7311518193133 | 1 | 1 | 16 | 13 | 6 | 53 | C* | 18 | 50 |
| N1613F08 | 7311518193140 | 1 | 1 | 16 | 13 | 8 | 53 | F* | 40 | 50 |
| N1613M08 | 7311518182267 | 1 | 1 | 16 | 13 | 8 | 53 | M | 28 | x 50 |
| N1613M08E | 7311518182274 | 1 | 1 | 16 | 13 | 8 | 53 | M* | 28 | 50 |
| N1613C08 | 7311518193157 | 1 | 1 | 16 | 13 | 8 | 53 | C | 18 | 50 |

CARBIDE ROTARY BURRS FOR ALUMINIUM



13 PRODUCTS



CONSISTENT CUTTING PERFORMANCE
ALL AROUND THE BURR HEAD


STRONG SHANK CAN HANDLE SPEEDS
FROM 1,000 UP TO 100,000 RPM

MADE OF POWERFUL
LONG-LASTING CARBIDE

DESIGNED FOR ALUMINIUM
AND OTHER SOFT MATERIALS

A-AL

CARBIDE ROTARY BURRS WITH CYLINDRICAL HEAD FOR ALUMINIUM



FEATURES:

- Deburring aluminium and other soft materials
- Use wax to avoid chip build-up
- Special cutting edge suitable for soft materials
- Type of cut: AL = AL-cut
- Stock standard: X = yes


ASSORTMENT

| | | | | A | B | C | D | | | | | | | | |
|------------|---------------|---|---|----|----|---|----|----|---|---|----|--|--|--|--|
| A0616AL06E | 7311518181802 | 1 | 1 | 6 | 16 | 6 | 51 | AL | 5 | x | 20 | | | | |
| A1225AL06E | 7311518187620 | 1 | 1 | 12 | 25 | 6 | 70 | AL | 6 | x | 50 | | | | |

| | | | | A | B | C | D | | | | | | | | |
|------------|---------------|---|---|----|----|---|----|----|---|---|----|--|--|--|--|
| A1225AL08E | 7311518181819 | 1 | 1 | 12 | 25 | 8 | 76 | AL | 6 | x | 50 | | | | |

C-AL

CARBIDE ROTARY BURRS WITH ROUND NOSE CYLINDRICAL HEAD FOR ALUMINIUM



FEATURES:

- Deburring aluminium and other soft materials
- Use wax to avoid chip build-up
- Special cutting edge suitable for soft materials
- Type of cut: AL = AL-cut
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|---|---|----|--|
| CO616AL06 | 7311518181826 | 1 | 1 | 6 | 16 | 6 | 51 | AL | 5 | x | 20 | |
| C1225AL06 | 7311518187637 | 1 | 1 | 12 | 25 | 6 | 70 | AL | 6 | x | 50 | |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|---|---|----|--|
| C1225AL08 | 7311518181833 | 1 | 1 | 12 | 25 | 8 | 76 | AL | 6 | x | 50 | |

D-AL

CARBIDE ROTARY BURRS WITH SPHERICAL HEAD FOR ALUMINIUM



FEATURES:

- Deburring aluminium and other soft materials
- Use wax to avoid chip build-up
- Special cutting edge suitable for soft materials
- Type of cut: AL = AL-cut
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|---|---|----|--|
| D1211AL06 | 7311518187644 | 1 | 1 | 12 | 11 | 6 | 56 | AL | 6 | x | 50 | |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|-----|---|--|----|--|
| D1211AL08 | 7311518181840 | 1 | 1 | 12 | 11 | 8 | 62 | AL* | 6 | | 60 | |

F-AL

CARBIDE ROTARY BURRS WITH ROUND NOSE TREE HEAD FOR ALUMINIUM



FEATURES:

- Deburring aluminium and other soft materials
- Use wax to avoid chip build-up
- Special cutting edge for soft materials
- Type of cut: AL = AL-cut
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|---|---|----|--|
| F0618AL06 | 7311518181857 | 1 | 1 | 6 | 18 | 6 | 51 | AL | 5 | x | 20 | |
| F1225AL06 | 7311518187651 | 1 | 1 | 12 | 25 | 6 | 70 | AL | 6 | x | 50 | |

| | | | | | A | B | C | D | | | | |
|-----------|---------------|---|---|----|----|---|----|----|---|---|----|--|
| F1225AL08 | 7311518181864 | 1 | 1 | 12 | 25 | 8 | 70 | AL | 6 | x | 50 | |

L-AL

CARBIDE ROTARY BURRS WITH ROUND NOSE CONICAL HEAD FOR ALUMINIUM



FEATURES:

- Deburring aluminium and other soft materials
- Use wax to avoid chip build-up
- Special cutting edge suitable for soft materials
- Type of cut: AL = AL-cut
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | | |
|-----------|---------------|---|---|----|----|---|----|----|---|---|--|--|----|
| L1230AL06 | 7311518187668 | 1 | 1 | 12 | 30 | 6 | 76 | AL | 6 | x | | | 50 |

| | | | | | A | B | C | D | | | | | |
|-----------|---------------|---|---|----|----|---|----|-----|---|--|--|--|----|
| L1230AL08 | 7311518181871 | 1 | 1 | 12 | 30 | 8 | 82 | AL* | 6 | | | | 50 |

A-INT

CARBIDE ROTARY BURRS WITH CYLINDRICAL HEAD - LONG



FEATURES:

- Internal toolpost grinding for centre lathe
- Special cutting edge for high finish
- Type of cut: D = Diamond
- Stock standard: X = yes


ASSORTMENT

| | | | | | A | B | C | D | | | | | |
|-----------|---------------|---|---|---|----|---|----|----|--------|--|--|--|----|
| A0408F03D | 7311518197926 | 1 | 1 | 4 | 8 | 3 | 50 | D* | 20, 20 | | | | 6 |
| A0610F06D | 7311518197933 | 1 | 1 | 6 | 10 | 6 | 65 | D* | 24, 24 | | | | 15 |

| | | | | | A | B | C | D | | | | | |
|-----------|---------------|---|---|---|----|---|----|---|--------|---|--|--|----|
| A0810F06D | 7311518197957 | 1 | 1 | 8 | 10 | 6 | 65 | D | 28, 28 | x | | | 20 |

A/G

CARBIDE ROTARY BURRS WITH NEEDLE HEAD FOR TYRE REPAIR



FEATURES:

- Cleaning and reaming for repairs of tyres
- Maximum speed 1500 r.p.m. Speeds exceeding 1500 r.p.m. generates heat which destroys the bond between the rubber and the steel reinforcement
- Burrs marked with "T" in column "Shank mm" have a triangular shank
- Type of cut: X = X-cut
- Stock standard: X = yes

ASSORTMENT

| | | | | | A | B | C | D | | | | | |
|------------|---------------|---|---|---|----|-------|----|----|-------|---|--|--|----|
| A0320M03X | 7311518197773 | 1 | 1 | 3 | 20 | 3 | 40 | x | 14, 7 | x | | | 10 |
| A0625M06X | 7311518197780 | 1 | 1 | 6 | 25 | 6 | 65 | x | 16, 8 | x | | | 20 |
| G0645M4.9X | 7311518195380 | 1 | 1 | 6 | 45 | T 4.9 | 75 | x* | 12, 6 | | | | 50 |

| | | | | | A | B | C | D | | | | | |
|--------------|---------------|---|---|----|----|-------|-----|----|--------|--|--|--|----|
| G0845M6.6X | 7311518195403 | 1 | 1 | 8 | 45 | T 6.6 | 90 | x* | 16, 8 | | | | 60 |
| G1050M8.3X | 7311518195397 | 1 | 1 | 10 | 50 | T 8.3 | 110 | x* | 20, 10 | | | | 70 |
| HSSG-G0645MX | 7311518195496 | 1 | 1 | 6 | 45 | 6 | 75 | x* | 12, 6 | | | | 50 |

HIGH-SPEED STEEL **ROTARY BURRS**



20 PRODUCTS



**BEST CHOICE WHEN THE RISK
OF IMPACT SHOCK IS HIGH**




USE HSS BURRS WHEN OPTIMAL MACHINING CONDITIONS CAN'T BE MAINTAINED OR WHEN THE RISK OF VIBRATION AND IMPACT SHOCK IS HIGH

PERFECT GEOMETRY BURR HEAD

MADE FROM ONE PIECE:
REDUCES THE RISK OF BREAKAGE

HSSG-A

HSS ROTARY BURRS WITH CYLINDRICAL HEAD



FEATURES:

- Rotary burrs, HSS
- High-speed steel burrs are used primarily for machining soft steel, aluminium, bronze, brass, etc.
- High-speed steel burrs are a better choice when optimal machining conditions cannot be maintained or, when the risk of vibration and impact shock are high
- Also usable with low cutting speeds

- Type of cut:
M: Medium, for machining unhardened steel and other moderately hard materials under normal conditions
EC: Extra coarse, for soft materials when good stock removal is required, counteracts chip build-up between teeth
- Packaging: Plastic box - Individually packed in boxes of 5


ASSORTMENT

| | | | | | A | B | C | | |
|-------------|---------------|---|---|----|----|---|---|----|--|
| HSSG-A0616M | 7311518023379 | 5 | 1 | 6 | 16 | 6 | M | 20 | |
| HSSG-A1020M | 7311518023386 | 5 | 1 | 10 | 20 | 6 | M | 30 | |

| | | | | | A | B | C | | |
|--------------|---------------|---|---|----|----|---|----|----|--|
| HSSG-A1225EC | 7311518023409 | 5 | 1 | 12 | 25 | 6 | EC | 40 | |
| HSSG-A1225M | 7311518023393 | 5 | 1 | 12 | 25 | 6 | M | 40 | |

HSSG-C

HSS ROTARY BURRS WITH CYLINDRICAL ROUND NOSE HEAD



FEATURES:

- Rotary burrs, HSS
- High-speed steel burrs are used primarily for machining soft steel, aluminium, bronze, brass, etc.
- High-speed steel burrs are a better choice when optimal machining conditions cannot be maintained or, when the risk of vibration and impact shock are high
- Also usable with low cutting speeds

- Type of cut:
 - M: Medium, for machining unhardened steel and other moderately hard materials under normal conditions
 - EC: Extra coarse, for soft materials when good stock removal is required, counteracts chip build-up between teeth
- Packaging: Plastic box - Individually packed in boxes of 5


ASSORTMENT

| | | | | A | B | C | | |
|-------------|---------------|---|---|----|----|---|---|----|
| HSSG-C0616M | 7311518023423 | 5 | 1 | 6 | 16 | 6 | M | 20 |
| HSSG-C1020M | 7311518023430 | 5 | 1 | 10 | 20 | 6 | M | 20 |

| | | | | A | B | C | | |
|--------------|---------------|---|---|----|----|---|----|----|
| HSSG-C1225EC | 7311518023454 | 5 | 1 | 12 | 25 | 6 | EC | 40 |
| HSSG-C1225M | 7311518023447 | 5 | 1 | 12 | 25 | 6 | M | 40 |

HSSG-D

HSS ROTARY BURRS WITH SPHERICAL HEAD



FEATURES:

- Rotary burrs, HSS
- High-speed steel burrs are used primarily for machining soft steel, aluminium, bronze, brass, etc.
- High-speed steel burrs are a better choice when optimal machining conditions cannot be maintained or, when the risk of vibration and impact shock are high
- Also usable with low cutting speeds

- Type of cut:
 - M: Medium, for machining unhardened steel and other moderately hard materials under normal conditions
 - EC: Extra coarse, for soft materials when good stock removal is required. Counteracts chip build-up between teeth
- Packaging: Plastic box - Individually packed in boxes of 5


ASSORTMENT

| | | | | A | B | C | | |
|-------------|---------------|---|---|----|---|---|---|----|
| HSSG-D0606M | 7311518023461 | 5 | 1 | 6 | 6 | 6 | M | 20 |
| HSSG-D0807M | 7311518023478 | 5 | 1 | 8 | 7 | 6 | M | 20 |
| HSSG-D1009M | 7311518023485 | 5 | 1 | 10 | 9 | 6 | M | 20 |

| | | | | A | B | C | | |
|--------------|---------------|---|---|----|----|---|----|----|
| HSSG-D1211EC | 7311518023508 | 5 | 1 | 12 | 11 | 6 | EC | 20 |
| HSSG-D1211M | 7311518023492 | 5 | 1 | 12 | 11 | 6 | M | 20 |

HSSG-E

HSS ROTARY BURRS WITH OVAL HEAD



FEATURES:

- Rotary burrs, HSS
- High-speed steel burrs are used primarily for machining soft steel, aluminium, bronze, brass, etc.
- High-speed steel burrs are a better choice when optimal machining conditions cannot be maintained or, when the risk of vibration and impact shock are high
- Also usable with low cutting speeds

- Type of cut:
 - M: Medium, for machining unhardened steel and other moderately hard materials under normal conditions
 - EC: Extra coarse, for soft materials when good stock removal is required. Counteracts chip build-up between teeth
- Packaging: Plastic box - Individually packed in boxes of 5


ASSORTMENT

| | | | | A | B | C | | |
|--------------|---------------|---|---|----|----|---|----|----|
| HSSG-E0614M | 7311518023522 | 5 | 1 | 6 | 14 | 6 | M | 20 |
| HSSG-E1222EC | 7311518023546 | 5 | 1 | 12 | 22 | 6 | EC | 30 |

| | | | | A | B | C | | |
|-------------|---------------|---|---|----|----|---|---|----|
| HSSG-E1222M | 7311518023539 | 5 | 1 | 12 | 22 | 6 | M | 30 |

HSSG-F

HSS ROTARY BURRS WITH ROUND NOSE TREE HEAD



FEATURES:

- Rotary burrs, HSS
- High-speed steel burrs are used primarily for machining soft steel, aluminium, bronze, brass, etc.
- High-speed steel burrs are a better choice when optimal machining conditions cannot be maintained or, when the risk of vibration and impact shock are high

- Also usable with low cutting speeds
- Type of cut:
 - M: Medium, for machining unhardened steel and other moderately hard materials under normal conditions
- Packaging: Plastic box - Individually packed in boxes of 5


ASSORTMENT

| | | | | A | B | C | | |
|-------------|---------------|---|---|---|----|---|---|----|
| HSSG-F0618M | 7311518023560 | 5 | 1 | 6 | 18 | 6 | M | 20 |

| | | | | A | B | C | | |
|-------------|---------------|---|---|----|----|---|---|----|
| HSSG-F1225M | 7311518023577 | 5 | 1 | 12 | 25 | 6 | M | 30 |

HSSG-G

HSS ROTARY BURRS WITH POINTED TREE HEAD



FEATURES:

- Rotary burrs, HSS
- High-speed steel burrs are used primarily for machining soft steel, aluminium, bronze, brass, etc.
- High-speed steel burrs are a better choice when optimal machining conditions cannot be maintained or, when the risk of vibration and impact shock are high
- Also usable with low cutting speeds

- Type of cut:
 - M: Medium, for machining unhardened steel and other moderately hard materials under normal conditions
 - EC: Extra Coarse, for soft materials when good stock removal is required, counteracts chip build-up between teeth
- Packaging: Plastic box - Individually packed in boxes of 5


ASSORTMENT

| | | | | | A | B | C | | |
|-------------|---------------|---|---|----|----|---|---|----|--|
| HSSG-G0618M | 7311518023591 | 5 | 1 | 6 | 18 | 6 | M | 20 | |
| HSSG-G1220M | 7311518023607 | 5 | 1 | 12 | 20 | 6 | M | 30 | |

| | | | | | A | B | C | | |
|--------------|---------------|---|---|----|----|---|----|----|--|
| HSSG-G1225EC | 7311518023621 | 5 | 1 | 12 | 25 | 6 | EC | 30 | |
| HSSG-G1225M | 7311518023614 | 5 | 1 | 12 | 25 | 6 | M | 30 | |

HSSG-M

HSS ROTARY BURRS WITH POINTED NOSE CONICAL HEAD



FEATURES:




- Rotary burrs, HSS
- High-speed steel burrs are used primarily for machining soft steel, aluminium, bronze, brass, etc.
- High-speed steel burrs are a better choice when optimal machining conditions cannot be maintained or, when the risk of vibration and impact shock are high

- Also usable with low cutting speeds
- Type of cut:
 - M: Medium, for machining unhardened steel and other moderately hard materials under normal conditions
- Packaging: Plastic box - Individually packed in boxes of 5

ASSORTMENT

| | | | | | A | B | C | | |
|-------------|---------------|---|---|---|----|---|---|----|--|
| HSSG-M0618M | 7311518023638 | 5 | 1 | 6 | 18 | 6 | M | 20 | |

| | | | | | A | B | C | | |
|-------------|---------------|---|---|----|----|---|---|----|--|
| HSSG-M1227M | 7311518023645 | 5 | 1 | 12 | 27 | 6 | M | 30 | |



563






DRILL BITS

PRODUCT INDEX

| | |
|---|-----|
| <i>DRILL BITS FOR REINFORCED CONCRETE</i> | 104 |
| <i>CHISELS FOR REINFORCED CONCRETE</i> | 109 |
| <i>DRILL BITS FOR WOOD</i> | 112 |
| <i>DRILL BITS FOR METAL</i> | 114 |
| <i>STEP DRILL BITS</i> | 120 |

563
PRODUCTS

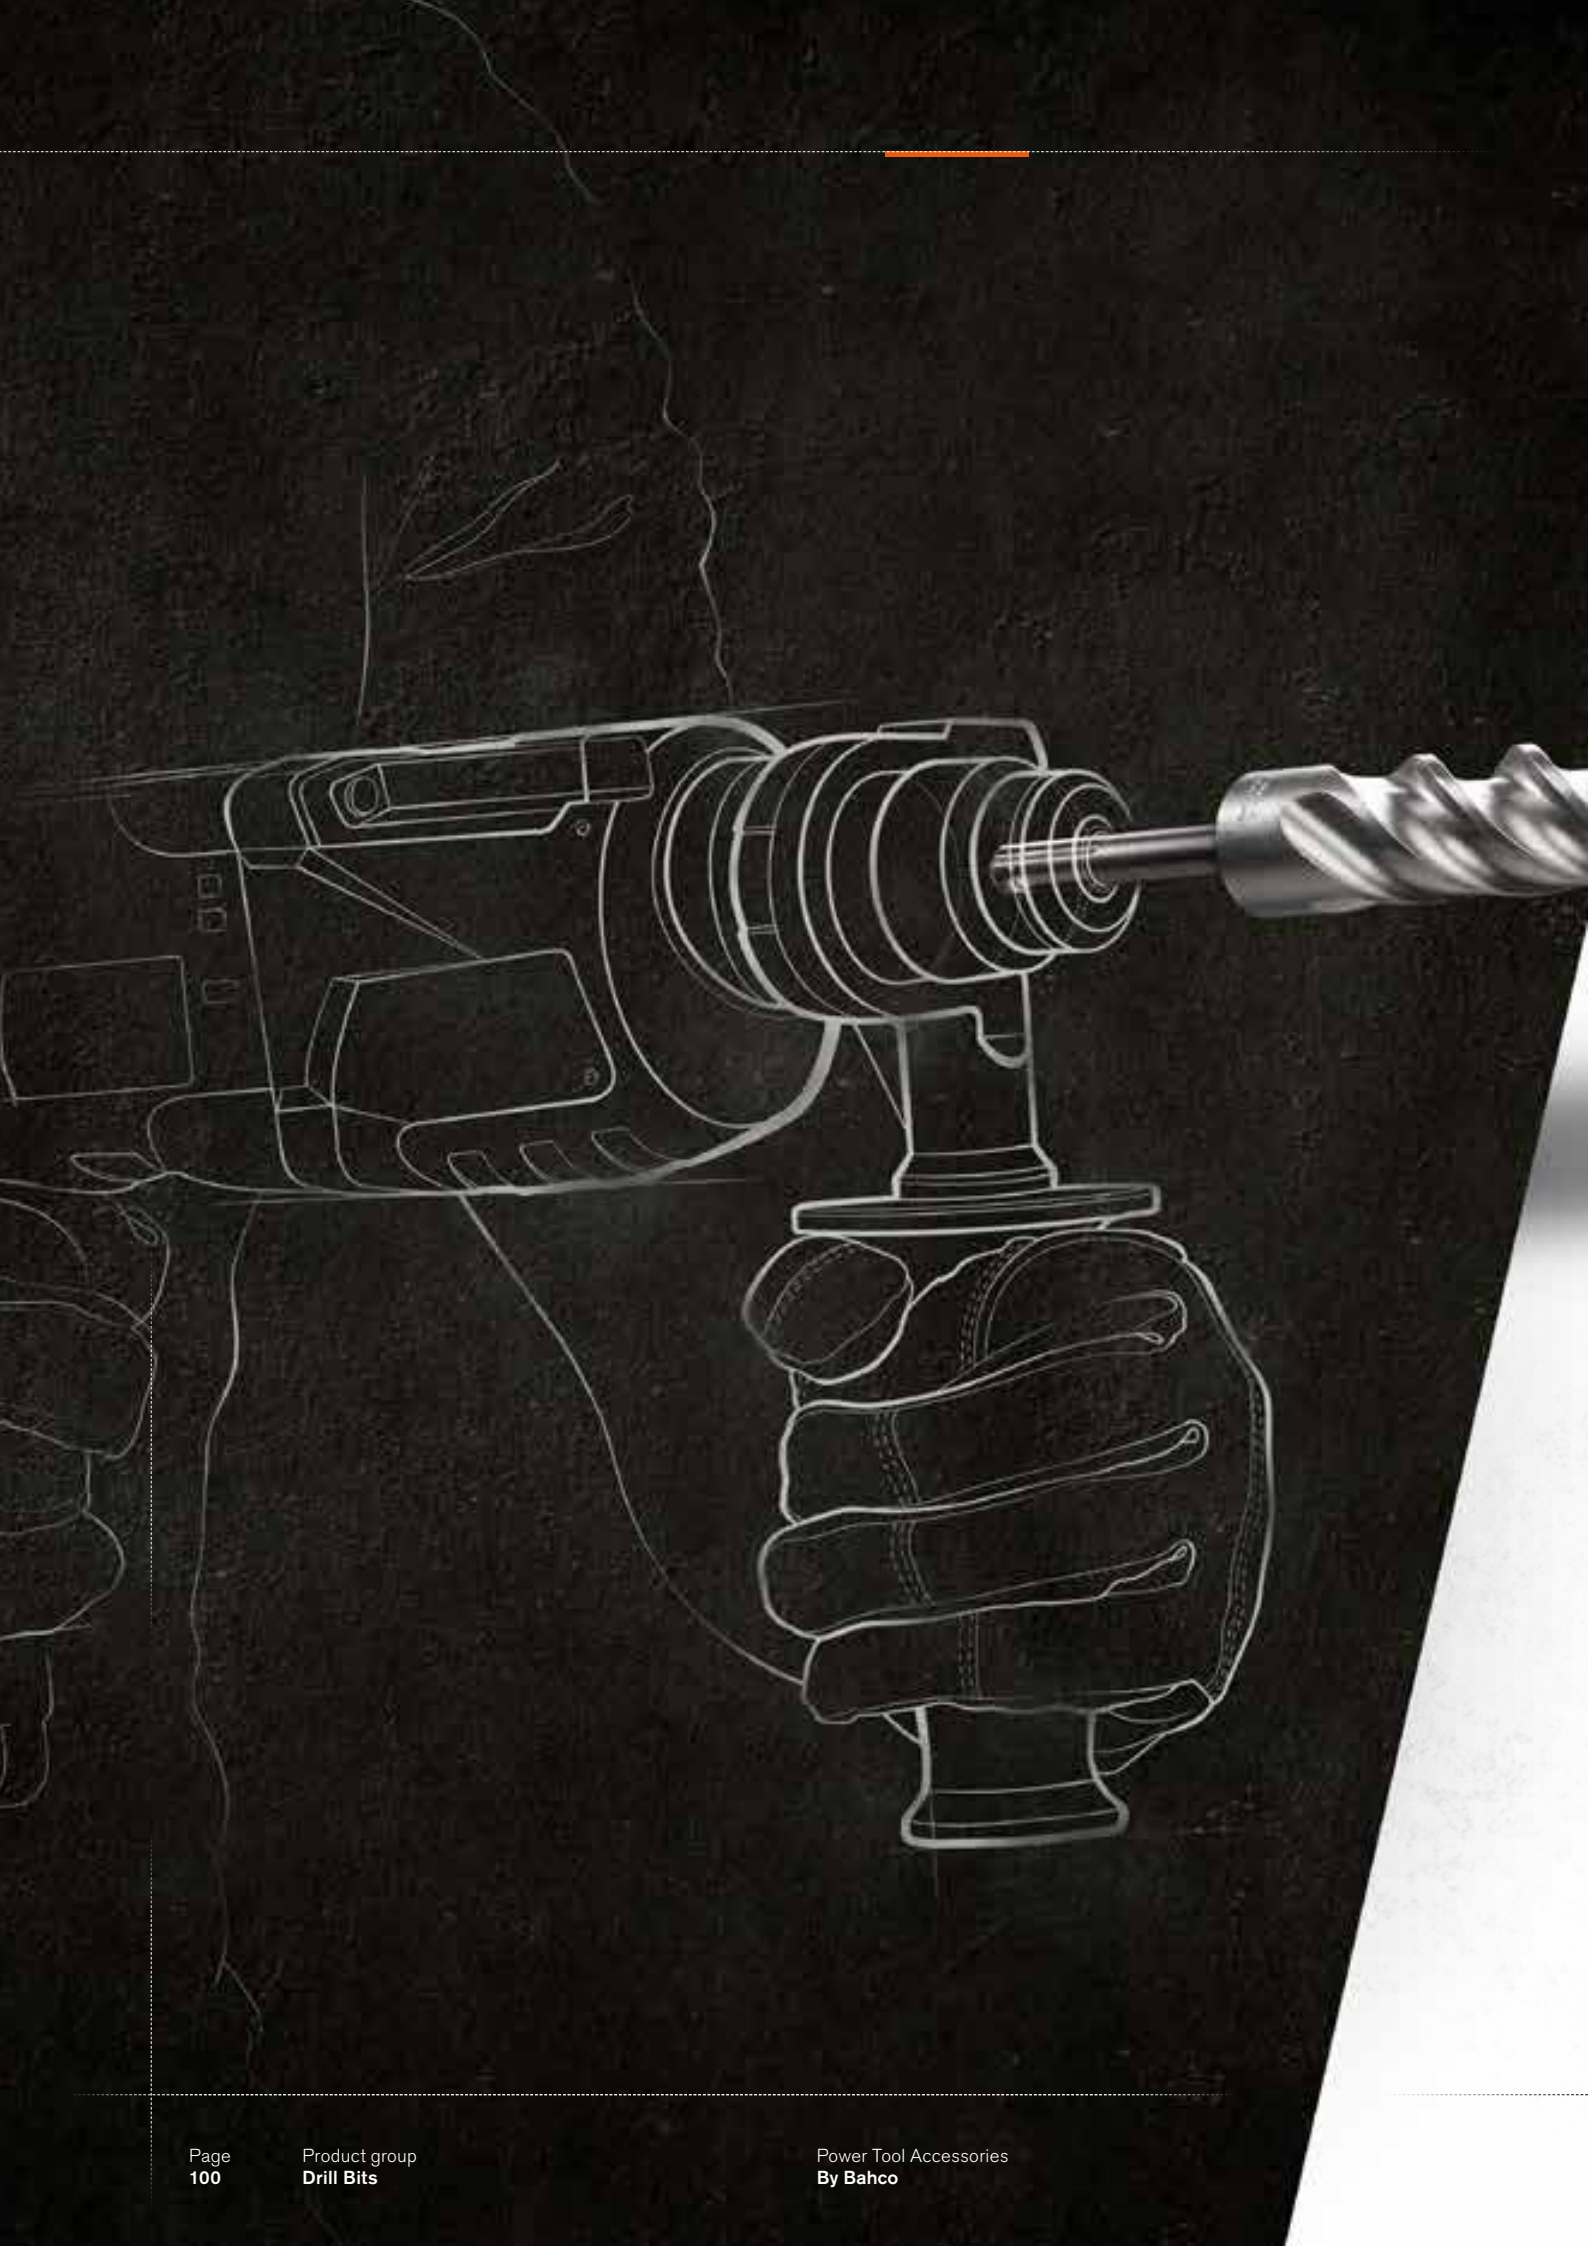

A GROUND-BREAKING SOLUTION FOR EVERY APPLICATION



***SDS-PLUS AND SDS-MAX DRILL BITS WITH
CARBIDE SELF-CENTRING SPLIT POINT***



***HEAT-TREATED AND TEMPERED
WOOD DRILL BITS FOR LONG LIFE***



***HSS-E METAL DRILL BITS
WITH 5% COBALT FOR HIGH DURABILITY***

563

FULL OF POWER

Bahco provides a wide range of professional, high-quality drills bits for use in most applications, and in almost any conditions.

SDS DRILL BITS FOR REINFORCED CONCRETE

When you need ultimate power our SDS-Plus and SDS-Max drill bits are up to the job. The carbide head ensures a long lifetime, while the self-centring tip provides you with optimum guidance and control when drilling, even in reinforced concrete.

DRILL BITS FOR WOOD

We offer a wide selection of drill bits for wood to fit every need. Crafted from heat-treated and tempered high-carbon steel, our range of drill bits for wood feature a positive cutting angle for faster drilling and aggressive chip extraction.

5% COBALT HSS-E DRILL BITS FOR METAL

Our professional HSS-E drill bits are manufactured with a 5% cobalt content for increased heat resistance and cutting performance. The top angle of 135° with self-centring split-point tip ensures quick drilling and perfect centring. With the innovative Speed Point, you don't need to pre-punch or use a pilot drill.

FULL SUPPORT

SDS DRILL BITS FOR REINFORCED CONCRETE




SDS-PLUS AND SDS-MAX DRILL BITS

The strong carbide head ensures a long lifetime, even in reinforced concrete.



MASONRY DRILL BITS

The carbide tip makes this drill suitable for rotary drilling in concrete, lightweight concrete, brick, stone, hollow block, ceramics, marble etc.



SDS-PLUS AND SDS-MAX CHISELS

Need even more power? Choose one of the 18 SDS-Plus or SDS-Max chisels for extreme demolition work!

DRILL BITS FOR WOOD



AUGER DRILL BITS

Used to drill a high-precision splinter-free hole in all kinds of grained timber. The full screw tip generates a pull, making drilling easier with less manual power.



FLAT DRILL BITS

These bits are ideal for fast, effective drilling in all grains, in soft and hardwood end-grained timber.



TWIST DRILL BITS

Recommended for drilling in solid wood, chip-board and wooden fibre boards.

5% COBALT HSS-E DRILL BITS FOR METAL



HSS-E COBALT DRILL BITS

The 135° self-centring split-point tip ensures quick drilling, perfect centring and less drilling pressure. Manufactured with 5% cobalt!



HSS DRILL BITS

High-Speed Steel drills are suitable for drilling holes in brass, bronze, carbon steel, cast iron, steel alloys and stainless steel.



STEP DRILLS

Designed for drilling thinner metal sheet, the Bahco step drills with their titanium-nitride surface last four to five times longer than ordinary step drills.



FULL RANGE

563 PRODUCTS

| |  |  |  |  |  |  |  |  |  |  |  |  | |
|---|---|---|---|---|---|--|---|---|---|---|---|---|---|
| Concrete Drills  3-25 mm 60-600 mm | ✓ | ✓ | | | | | | | | | | | |
| SDS-Plus Concrete  4-26 mm 110-1000 mm | ✓ | ✓ | | | | | | | | | | | |
| SDS-Plus Reinforced Concrete  5-32 mm 110-1000 mm | ✓ | ✓ | ✓ | | | | | | | | | | |
| SDS-Max Reinforced Concrete  12-52 mm 340-1320 mm | ✓ | ✓ | ✓ | | | | | | | | | | |
| SDS-Plus Chisels  20-60 mm 200-250 mm | ✓ | ✓ | ✓ | | | | | | | | | | |
| SDS-Max Chisels  24-115 mm 240-600 mm | ✓ | ✓ | ✓ | | | | | | | | | | |
| Twist Drills  3-20 mm 61-250 mm | | | | ✓ | ✓ | | | | | | | | |
| Flat Bit Drills  6-40 mm 152-400 mm | | | | ✓ | ✓ | | | | | | | | |
| Auger Bit Drills  6-32 mm 230-460 mm | | | | ✓ | ✓ | | | | | | | | |
| HSS-R  1-13 mm 34-151 mm | | | | | | | ✓ | ✓ | ✓ | | | | |
| HSS-G  1-20 mm 34-205 mm | | | | | | | ✓ | ✓ | ✓ | | | ✓ | |
| HSS-E Cobalt  0,5-20 mm 22-205 mm | | | | | | | ✓ | ✓ | ✓ | ✓ | | ✓ | |
| Step Drill Bits  4-40,5 mm 76-100 mm | | | | | | | | ✓ | | | | | |

DRILL BITS FOR REINFORCED CONCRETE

DRILL BITS FOR WOOD

DRILL BITS FOR METAL

DRILL BITS FOR REINFORCED CONCRETE



217 PRODUCTS



**SDS-MAX DRILLS FOR
REINFORCED CONCRETE**



LONG LIFETIME,
HIGH-PERFORMANCE
HAMMER DRILL BIT

HIGH RESISTANCE TO WEAR
AND TORSION STRESSES

CANAL FLUTE FOR EFFECTIVE
DUST REMOVAL

AGGRESSIVE SOLID
CARBIDE HEAD

SELF-CENTRING
SPLIT POINT

UNRIVALLED POWER!

SDS-PLUS DRILLS FOR CONCRETE



SELF-CENTRING
SPLIT POINT


CONCRETE DRILLS FOR MASONRY



CARBIDE HEAD

4656

SDS MAX DRILLS FOR REINFORCED CONCRETE







FEATURES:





- Use/Application: Masonry, Reinforced Concrete, Natural Stone and Artificial Stone
- Specially designed head geometry for better centre drilling, faster drilling progress and precision drilling
- Canal flute provides effective dust removal for increased endurance and reduced heat friction
- To withstand wear the drills are made of high-alloy steel produced with optimised hardening temperatures
- Immediate centring tip, prevents skidding on smooth surfaces
- Specially designed cutting head with 4-cutting edges to enable better precision-drilling in reinforced concrete
- Optimised 4x90° symmetry makes all four carbide cutting edges work evenly and simultaneously
- Fits directly into all hammer drilling machines with SDS max holders

ASSORTMENT:

| | | | | A | B | D |
|-------------|---------------|---|---|----|-----|-----|
| 4656-12-340 | 7314150386932 | 1 | 1 | 12 | 340 | 200 |
| 4656-12-540 | 7314150387021 | 1 | 1 | 12 | 540 | 400 |
| 4656-12-690 | 7314150387045 | 1 | 1 | 12 | 690 | 550 |
| 4656-14-340 | 7314150387069 | 1 | 1 | 14 | 340 | 200 |
| 4656-14-540 | 7314150387076 | 1 | 1 | 14 | 540 | 400 |
| 4656-15-340 | 7314150387083 | 1 | 1 | 15 | 340 | 200 |
| 4656-15-540 | 7314150387090 | 1 | 1 | 15 | 540 | 400 |
| 4656-16-340 | 7314150387106 | 1 | 1 | 16 | 340 | 200 |


| | | | | A | B | D |
|--------------|---------------|---|---|----|------|------|
| 4656-16-540 | 7314150387113 | 1 | 1 | 16 | 540 | 400 |
| 4656-16-940 | 7314150387120 | 1 | 1 | 16 | 940 | 800 |
| 4656-16-1320 | 7314150387137 | 1 | 1 | 16 | 1320 | 1180 |
| 4656-18-340 | 7314150387144 | 1 | 1 | 18 | 340 | 200 |
| 4656-18-540 | 7314150387151 | 1 | 1 | 18 | 540 | 400 |
| 4656-18-940 | 7314150387168 | 1 | 1 | 18 | 940 | 800 |
| 4656-18-1320 | 7314150387175 | 1 | 1 | 18 | 1320 | 1180 |
| 4656-20-320 | 7314150387182 | 1 | 1 | 20 | 320 | 200 |

|  |  |  |  | A | B | D |
|---|---|---|---|----|------|------|
| 4656-20-520 | 7314150387199 | 1 | 1 | 20 | 520 | 400 |
| 4656-20-920 | 7314150387205 | 1 | 1 | 20 | 920 | 800 |
| 4656-20-1320 | 7314150387212 | 1 | 1 | 20 | 1320 | 1180 |
| 4656-22-320 | 7314150387229 | 1 | 1 | 22 | 320 | 200 |
| 4656-22-520 | 7314150387236 | 1 | 1 | 22 | 520 | 400 |
| 4656-22-920 | 7314150387243 | 1 | 1 | 22 | 920 | 800 |
| 4656-22-1320 | 7314150387250 | 1 | 1 | 22 | 1320 | 1200 |
| 4656-24-320 | 7314150387267 | 1 | 1 | 24 | 320 | 200 |
| 4656-24-520 | 7314150387274 | 1 | 1 | 24 | 520 | 400 |
| 4656-25-320 | 7314150387281 | 1 | 1 | 25 | 320 | 200 |
| 4656-25-520 | 7314150387298 | 1 | 1 | 25 | 520 | 400 |
| 4656-25-920 | 7314150387304 | 1 | 1 | 25 | 920 | 800 |
| 4656-25-1320 | 7314150387311 | 1 | 1 | 25 | 1320 | 1200 |
| 4656-26-520 | 7314150387328 | 1 | 1 | 26 | 520 | 400 |
| 4656-28-370 | 7314150387434 | 1 | 1 | 28 | 370 | 250 |
| 4656-28-570 | 7314150387458 | 1 | 1 | 28 | 570 | 450 |
| 4656-28-670 | 7314150387489 | 1 | 1 | 28 | 670 | 550 |
| 4656-28-920 | 7314150387526 | 1 | 1 | 28 | 920 | 800 |
| 4656-30-370 | 7314150387540 | 1 | 1 | 30 | 370 | 250 |
| 4656-30-570 | 7314150387571 | 1 | 1 | 30 | 570 | 450 |

|  |  |  |  | A | B | D |
|---|--|---|---|----|------|------|
| 4656-32-370 | 7314150387595 | 1 | 1 | 32 | 370 | 250 |
| 4656-32-570 | 7314150387618 | 1 | 1 | 32 | 570 | 450 |
| 4656-32-920 | 7314150387632 | 1 | 1 | 32 | 920 | 800 |
| 4656-32-1320 | 7314150387649 | 1 | 1 | 32 | 1320 | 1200 |
| 4656-35-370 | 7314150387656 | 1 | 1 | 35 | 370 | 250 |
| 4656-35-570 | 7314150387663 | 1 | 1 | 35 | 570 | 450 |
| 4656-35-670 | 7314150387670 | 1 | 1 | 35 | 670 | 550 |
| 4656-37-370 | 7314150387687 | 1 | 1 | 37 | 370 | 250 |
| 4656-37-570 | 7314150387694 | 1 | 1 | 37 | 570 | 450 |
| 4656-37-920 | 7314150387700 | 1 | 1 | 37 | 920 | 800 |
| 4656-38-370 | 7314150387717 | 1 | 1 | 38 | 370 | 250 |
| 4656-38-570 | 7314150387724 | 1 | 1 | 38 | 570 | 450 |
| 4656-40-370 | 7314150387731 | 1 | 1 | 40 | 370 | 250 |
| 4656-40-570 | 7314150387748 | 1 | 1 | 40 | 570 | 450 |
| 4656-40-920 | 7314150387755 | 1 | 1 | 40 | 920 | 800 |
| 4656-40-1320 | 7314150387762 | 1 | 1 | 40 | 1320 | 1200 |
| 4656-45-570 | 7314150387779 | 1 | 1 | 45 | 570 | 450 |
| 4656-45-920 | 7314150387786 | 1 | 1 | 45 | 920 | 800 |
| 4656-50-570 | 7314150387793 | 1 | 1 | 50 | 570 | 450 |
| 4656-52-570 | 7314150387809 | 1 | 1 | 52 | 570 | 450 |

4651





SDS+ DRILLS FOR REINFORCED CONCRETE










FEATURES:





- Use/Application: Masonry, Reinforced Concrete, Natural Stone, Artificial Stone
- Specially designed head geometry for better centre drilling, faster drilling progress, precision drilling
- Canal flute provides effective dust removal for increased endurance and reduced heat friction
- To withstand wear the drills are made of high-alloy steel produced with an optimised hardening temperature
- Immediate centring tip prevents skidding on smooth surfaces
- Specially designed cutting head with 4-cutting edges improves precision-drilling in reinforced concrete
- Optimised 4x90° symmetry makes all four carbide cutting edges work evenly and simultaneously
- Fits directly into all hammer drilling machines with SDS-plus and HILTI TE-C drive

ASSORTMENT:


|  |  |  |  | A | B | D |
|---|---|---|---|-----|-----|-----|
| 4651-5-110 | 7314150385683 | 1 | 1 | 5 | 110 | 50 |
| 4651-5-160 | 7314150385690 | 1 | 1 | 5 | 160 | 100 |
| 4651-5-210 | 7314150385706 | 1 | 1 | 5 | 210 | 150 |
| 4651-5-260 | 7314150385713 | 1 | 1 | 5 | 260 | 200 |
| 4651-5,5-110 | 7314150385720 | 1 | 1 | 5.5 | 110 | 50 |
| 4651-5,5-160 | 7314150385737 | 1 | 1 | 5.5 | 160 | 100 |
| 4651-6-110 | 7314150385744 | 1 | 1 | 6 | 110 | 50 |
| 4651-6-160 | 7314150385751 | 1 | 1 | 6 | 160 | 100 |
| 4651-6-210 | 7314150385768 | 1 | 1 | 6 | 210 | 150 |
| 4651-6-260 | 7314150385775 | 1 | 1 | 6 | 260 | 200 |
| 4651-6-310 | 7314150385782 | 1 | 1 | 6 | 310 | 250 |
| 4651-6,5-160 | 7314150385799 | 1 | 1 | 6.5 | 160 | 100 |
| 4651-6,5-210 | 7314150385805 | 1 | 1 | 6.5 | 210 | 150 |
| 4651-6,5-260 | 7314150385812 | 1 | 1 | 6.5 | 260 | 200 |
| 4651-6,5-310 | 7314150385829 | 1 | 1 | 6.5 | 310 | 250 |
| 4651-7-110 | 7314150385836 | 1 | 1 | 7 | 110 | 50 |
| 4651-7-160 | 7314150386253 | 1 | 1 | 7 | 160 | 100 |

|  |  |  |  | A | B | D |
|---|--|---|---|----|------|-----|
| 4651-8-110 | 7314150386277 | 1 | 1 | 8 | 110 | 50 |
| 4651-8-160 | 7314150386284 | 1 | 1 | 8 | 160 | 100 |
| 4651-8-210 | 7314150386291 | 1 | 1 | 8 | 210 | 150 |
| 4651-8-260 | 7314150386307 | 1 | 1 | 8 | 260 | 200 |
| 4651-8-310 | 7314150386314 | 1 | 1 | 8 | 310 | 250 |
| 4651-8-460 | 7314150386321 | 1 | 1 | 8 | 460 | 400 |
| 4651-9-160 | 7314150386338 | 1 | 1 | 9 | 160 | 100 |
| 4651-10-110 | 7314150386345 | 1 | 1 | 10 | 110 | 50 |
| 4651-10-160 | 7314150386352 | 1 | 1 | 10 | 160 | 100 |
| 4651-10-210 | 7314150386369 | 1 | 1 | 10 | 210 | 150 |
| 4651-10-260 | 7314150386376 | 1 | 1 | 10 | 260 | 200 |
| 4651-10-310 | 7314150386383 | 1 | 1 | 10 | 310 | 250 |
| 4651-10-450 | 7314150386390 | 1 | 1 | 10 | 450 | 390 |
| 4651-10-600 | 7314150386406 | 1 | 1 | 10 | 600 | 540 |
| 4651-10-1000 | 7314150386413 | 1 | 1 | 10 | 1000 | 940 |
| 4651-12-160 | 7314150386529 | 1 | 1 | 12 | 160 | 110 |
| 4651-12-210 | 7314150386536 | 1 | 1 | 12 | 210 | 160 |

|  |  |  |  | A | B | D |
|---|---|---|---|----|------|-----|
| 4651-12-260 | 7314150386543 | 1 | 1 | 12 | 260 | 210 |
| 4651-12-310 | 7314150386550 | 1 | 1 | 12 | 310 | 260 |
| 4651-12-450 | 7314150386567 | 1 | 1 | 12 | 450 | 400 |
| 4651-12-600 | 7314150386574 | 1 | 1 | 12 | 600 | 550 |
| 4651-12-1000 | 7314150386581 | 1 | 1 | 12 | 1000 | 950 |
| 4651-14-160 | 7314150386598 | 1 | 1 | 14 | 160 | 110 |
| 4651-14-210 | 7314150386604 | 1 | 1 | 14 | 210 | 160 |
| 4651-14-260 | 7314150386611 | 1 | 1 | 14 | 260 | 210 |
| 4651-14-310 | 7314150386628 | 1 | 1 | 14 | 310 | 260 |
| 4651-14-450 | 7314150386635 | 1 | 1 | 14 | 450 | 400 |
| 4651-14-600 | 7314150386642 | 1 | 1 | 14 | 600 | 550 |
| 4651-14-1000 | 7314150386659 | 1 | 1 | 14 | 1000 | 950 |
| 4651-15-160 | 7314150386666 | 1 | 1 | 15 | 160 | 110 |
| 4651-15-260 | 7314150386673 | 1 | 1 | 15 | 260 | 210 |
| 4651-15-450 | 7314150386680 | 1 | 1 | 15 | 450 | 400 |
| 4651-16-160 | 7314150386697 | 1 | 1 | 16 | 160 | 110 |
| 4651-16-210 | 7314150386710 | 1 | 1 | 16 | 210 | 160 |
| 4651-16-260 | 7314150386727 | 1 | 1 | 16 | 260 | 210 |
| 4651-16-310 | 7314150386734 | 1 | 1 | 16 | 310 | 260 |

|  |  |  |  | A | B | D |
|---|--|---|---|----|------|-----|
| 4651-16-450 | 7314150386741 | 1 | 1 | 16 | 450 | 400 |
| 4651-16-600 | 7314150386758 | 1 | 1 | 16 | 600 | 550 |
| 4651-16-1000 | 7314150386765 | 1 | 1 | 16 | 1000 | 950 |
| 4651-18-250 | 7314150386789 | 1 | 1 | 18 | 250 | 200 |
| 4651-18-450 | 7314150386796 | 1 | 1 | 18 | 450 | 400 |
| 4651-20-250 | 7314150386802 | 1 | 1 | 20 | 250 | 200 |
| 4651-20-450 | 7314150386819 | 1 | 1 | 20 | 450 | 400 |
| 4651-22-250 | 7314150386826 | 1 | 1 | 22 | 250 | 200 |
| 4651-22-450 | 7314150386833 | 1 | 1 | 22 | 450 | 400 |
| 4651-24-250 | 7314150386840 | 1 | 1 | 24 | 250 | 200 |
| 4651-24-450 | 7314150386857 | 1 | 1 | 24 | 450 | 400 |
| 4651-25-250 | 7314150386864 | 1 | 1 | 25 | 250 | 200 |
| 4651-25-450 | 7314150386871 | 1 | 1 | 25 | 450 | 400 |
| 4651-28-250 | 7314150386888 | 1 | 1 | 28 | 250 | 200 |
| 4651-28-450 | 7314150386895 | 1 | 1 | 28 | 450 | 400 |
| 4651-30-250 | 7314150386901 | 1 | 1 | 30 | 250 | 200 |
| 4651-30-450 | 7314150386918 | 1 | 1 | 30 | 450 | 400 |
| 4651-32-450 | 7314150386925 | 1 | 1 | 32 | 450 | 400 |

4652 SDS+ DRILLS FOR CONCRETE











FEATURES:

- Use/Application: Masonry, Concrete, Natural Stone, Artificial Stone
- Particularly suitable for drilling plug holes for fastenings
- Canal flute provides effective dust removal for increased endurance and reduced heat friction
- To withstand wear, the drills are made of high-alloy steel produced with optimised hardening temperatures

- Immediate centring tip prevents skidding on smooth surfaces
- Enlarged rebar chamfers (+35°) prevent side tip damages
- Fits directly into all hammer drilling machines with SDS-plus and HILTI TE-C drive

ASSORTMENT:

|  |  |  |  | A | B | D |
|---|---|---|---|-----|-----|-----|
| 4652-4-110 | 7314150384365 | 1 | 1 | 4 | 110 | 50 |
| 4652-4-160 | 7314150384372 | 1 | 1 | 4 | 160 | 100 |
| 4652-5-110 | 7314150384815 | 1 | 1 | 5 | 110 | 50 |
| 4652-5-160 | 7314150384839 | 1 | 1 | 5 | 160 | 100 |
| 4652-5-210 | 7314150384846 | 1 | 1 | 5 | 210 | 150 |
| 4652-5,5-110 | 7314150384853 | 1 | 1 | 5.5 | 110 | 50 |
| 4652-5,5-160 | 7314150384860 | 1 | 1 | 5.5 | 160 | 100 |
| 4652-6-110 | 7314150384877 | 1 | 1 | 6 | 110 | 50 |
| 4652-6-160 | 7314150384891 | 1 | 1 | 6 | 160 | 100 |
| 4652-6-210 | 7314150384907 | 1 | 1 | 6 | 210 | 150 |
| 4652-6-260 | 7314150384969 | 1 | 1 | 6 | 260 | 200 |
| 4652-6,5-110 | 7314150384976 | 1 | 1 | 6.5 | 110 | 50 |
| 4652-6,5-160 | 7314150384990 | 1 | 1 | 6.5 | 160 | 100 |
| 4652-7-110 | 7314150385003 | 1 | 1 | 7 | 110 | 50 |
| 4652-7-160 | 7314150391981 | 1 | 1 | 7 | 160 | 100 |
| 4652-8-110 | 7314150385034 | 1 | 1 | 8 | 110 | 50 |
| 4652-8-160 | 7314150385058 | 1 | 1 | 8 | 160 | 100 |
| 4652-8-210 | 7314150385065 | 1 | 1 | 8 | 210 | 150 |
| 4652-8-260 | 7314150385072 | 1 | 1 | 8 | 260 | 200 |


|  |  |  |  | A | B | D |
|---|--|---|---|----|-----|-----|
| 4652-8-460 | 7314150385089 | 1 | 1 | 8 | 460 | 400 |
| 4652-9-160 | 7314150385096 | 1 | 1 | 9 | 160 | 100 |
| 4652-9-210 | 7314150385102 | 1 | 1 | 9 | 210 | 150 |
| 4652-10-110 | 7314150385119 | 1 | 1 | 10 | 110 | 50 |
| 4652-10-160 | 7314150385126 | 1 | 1 | 10 | 160 | 100 |
| 4652-10-210 | 7314150385133 | 1 | 1 | 10 | 210 | 150 |
| 4652-10-260 | 7314150385140 | 1 | 1 | 10 | 260 | 200 |
| 4652-10-310 | 7314150385164 | 1 | 1 | 10 | 310 | 250 |
| 4652-10-450 | 7314150385171 | 1 | 1 | 10 | 450 | 400 |
| 4652-10-600 | 7314150385188 | 1 | 1 | 10 | 600 | 550 |
| 4652-11-160 | 7314150385195 | 1 | 1 | 11 | 160 | 100 |
| 4652-11-210 | 7314150385201 | 1 | 1 | 11 | 210 | 150 |
| 4652-11-260 | 7314150385218 | 1 | 1 | 11 | 260 | 200 |
| 4652-12-160 | 7314150385225 | 1 | 1 | 12 | 160 | 100 |
| 4652-12-210 | 7314150385232 | 1 | 1 | 12 | 210 | 150 |
| 4652-12-260 | 7314150385249 | 1 | 1 | 12 | 260 | 200 |
| 4652-12-310 | 7314150385256 | 1 | 1 | 12 | 310 | 250 |
| 4652-12-450 | 7314150385263 | 1 | 1 | 12 | 450 | 400 |
| 4652-12-600 | 7314150385270 | 1 | 1 | 12 | 600 | 550 |

| | | | | A | B | D |
|--------------|---------------|---|---|----|------|-----|
| 4652-12-1000 | 7314150385287 | 1 | 1 | 12 | 1000 | 950 |
| 4652-13-160 | 7314150385294 | 1 | 1 | 13 | 160 | 100 |
| 4652-13-310 | 7314150385300 | 1 | 1 | 13 | 310 | 250 |
| 4652-14-160 | 7314150385317 | 1 | 1 | 14 | 160 | 100 |
| 4652-14-210 | 7314150385324 | 1 | 1 | 14 | 210 | 150 |
| 4652-14-260 | 7314150385331 | 1 | 1 | 14 | 260 | 200 |
| 4652-14-310 | 7314150385348 | 1 | 1 | 14 | 310 | 250 |
| 4652-14-450 | 7314150385355 | 1 | 1 | 14 | 450 | 400 |
| 4652-14-600 | 7314150385362 | 1 | 1 | 14 | 600 | 550 |
| 4652-14-1000 | 7314150385379 | 1 | 1 | 14 | 1000 | 950 |
| 4652-15-160 | 7314150385386 | 1 | 1 | 15 | 160 | 100 |
| 4652-15-260 | 7314150385393 | 1 | 1 | 15 | 260 | 200 |
| 4652-16-160 | 7314150385409 | 1 | 1 | 16 | 160 | 100 |
| 4652-16-210 | 7314150385416 | 1 | 1 | 16 | 210 | 150 |
| 4652-16-260 | 7314150385423 | 1 | 1 | 16 | 260 | 200 |
| 4652-16-310 | 7314150385430 | 1 | 1 | 16 | 310 | 250 |
| 4652-16-450 | 7314150385447 | 1 | 1 | 16 | 450 | 400 |
| 4652-16-600 | 7314150385454 | 1 | 1 | 16 | 600 | 550 |
| 4652-16-800 | 7314150385461 | 1 | 1 | 16 | 800 | 750 |
| 4652-16-1000 | 7314150385478 | 1 | 1 | 16 | 1000 | 950 |

| | | | | A | B | D |
|--------------|---------------|---|---|----|------|-----|
| 4652-18-200 | 7314150385485 | 1 | 1 | 18 | 200 | 150 |
| 4652-18-300 | 7314150385492 | 1 | 1 | 18 | 300 | 250 |
| 4652-18-450 | 7314150385508 | 1 | 1 | 18 | 450 | 400 |
| 4652-18-1000 | 7314150385515 | 1 | 1 | 18 | 1000 | 950 |
| 4652-20-200 | 7314150385522 | 1 | 1 | 20 | 200 | 150 |
| 4652-20-300 | 7314150385539 | 1 | 1 | 20 | 300 | 250 |
| 4652-20-450 | 7314150385546 | 1 | 1 | 20 | 450 | 400 |
| 4652-20-600 | 7314150385553 | 1 | 1 | 20 | 600 | 550 |
| 4652-20-1000 | 7314150385560 | 1 | 1 | 20 | 1000 | 950 |
| 4652-22-250 | 7314150385577 | 1 | 1 | 22 | 250 | 200 |
| 4652-22-450 | 7314150385584 | 1 | 1 | 22 | 450 | 400 |
| 4652-22-600 | 7314150385591 | 1 | 1 | 22 | 600 | 550 |
| 4652-22-1000 | 7314150385607 | 1 | 1 | 22 | 1000 | 950 |
| 4652-24-250 | 7314150385614 | 1 | 1 | 24 | 250 | 200 |
| 4652-24-450 | 7314150385621 | 1 | 1 | 24 | 450 | 400 |
| 4652-25-250 | 7314150385638 | 1 | 1 | 25 | 250 | 200 |
| 4652-25-450 | 7314150385645 | 1 | 1 | 25 | 450 | 400 |
| 4652-25-1000 | 7314150385652 | 1 | 1 | 25 | 1000 | 950 |
| 4652-26-250 | 7314150385669 | 1 | 1 | 26 | 250 | 200 |
| 4652-26-450 | 7314150385676 | 1 | 1 | 26 | 450 | 400 |

4641

DRILLS FOR MASONRY



FEATURES:

- Masonry drill for percussion drilling in concrete, brick, stone, ceramic tiles and marble etc
- Shank of low-alloy, hardened and tempered tool steel
- Black-oxidised surface with ground diameter
- Carbide tip ensures high drilling capacity and long-life
- High resistance to wear and torsion stresses

ASSORTMENT

| | | | | A | B | C | D |
|--------------|---------------|---|---|-----|-----|-----|-----|
| 4641-3-60 | 7314150382859 | 1 | 1 | 3 | 60 | 3 | 35 |
| 4641-4-75 | 7314150382866 | 1 | 1 | 4 | 75 | 4 | 45 |
| 4641-5-85 | 7314150382873 | 1 | 1 | 5 | 85 | 5 | 40 |
| 4641-5-150 | 7314150382880 | 1 | 1 | 5 | 150 | 5 | 80 |
| 4641-5,5-85 | 7314150382897 | 1 | 1 | 5.5 | 85 | 5.5 | 40 |
| 4641-6-100 | 7314150383016 | 1 | 1 | 6 | 100 | 6 | 55 |
| 4641-6-150 | 7314150383023 | 1 | 1 | 6 | 150 | 6 | 85 |
| 4641-6,5-100 | 7314150383030 | 1 | 1 | 6.5 | 100 | 6.5 | 55 |
| 4641-7-100 | 7314150383047 | 1 | 1 | 7 | 100 | 7 | 55 |
| 4641-8-120 | 7314150383054 | 1 | 1 | 8 | 120 | 8 | 70 |
| 4641-8-200 | 7314150383061 | 1 | 1 | 8 | 200 | 8 | 130 |
| 4641-9-120 | 7314150383078 | 1 | 1 | 9 | 120 | 9 | 70 |
| 4641-10-120 | 7314150383085 | 1 | 1 | 10 | 120 | 10 | 70 |
| 4641-10-200 | 7314150383115 | 1 | 1 | 10 | 200 | 10 | 130 |
| 4641-11-150 | 7314150383122 | 1 | 1 | 11 | 150 | 10 | 90 |
| 4641-12-150 | 7314150383139 | 1 | 1 | 12 | 150 | 10 | 90 |
| 4641-12-200 | 7314150383146 | 1 | 1 | 12 | 200 | 10 | 130 |
| 4641-13-150 | 7314150383153 | 1 | 1 | 13 | 150 | 10 | 90 |
| 4641-14-150 | 7314150383160 | 1 | 1 | 14 | 150 | 11 | 90 |

| | | | | A | B | C | D |
|-------------|---------------|---|---|----|-----|----|-----|
| 4641-16-150 | 7314150383177 | 1 | 1 | 16 | 150 | 11 | 90 |
| 4641-6-400 | 7314150383184 | 1 | 1 | 6 | 400 | 6 | 300 |
| 4641-8-400 | 7314150383191 | 1 | 1 | 8 | 400 | 8 | 300 |
| 4641-10-400 | 7314150383207 | 1 | 1 | 10 | 400 | 10 | 300 |
| 4641-10-600 | 7314150383221 | 1 | 1 | 10 | 600 | 10 | 450 |
| 4641-12-400 | 7314150383238 | 1 | 1 | 12 | 400 | 10 | 300 |
| 4641-12-600 | 7314150383245 | 1 | 1 | 12 | 600 | 10 | 450 |
| 4641-14-400 | 7314150383252 | 1 | 1 | 14 | 400 | 11 | 300 |
| 4641-14-600 | 7314150383269 | 1 | 1 | 14 | 600 | 11 | 450 |
| 4641-16-400 | 7314150383276 | 1 | 1 | 16 | 400 | 11 | 300 |
| 4641-16-600 | 7314150383283 | 1 | 1 | 16 | 600 | 11 | 450 |
| 4641-18-400 | 7314150383290 | 1 | 1 | 18 | 400 | 11 | 300 |
| 4641-18-600 | 7314150383306 | 1 | 1 | 18 | 600 | 11 | 450 |
| 4641-20-400 | 7314150383313 | 1 | 1 | 20 | 400 | 11 | 300 |
| 4641-20-600 | 7314150383320 | 1 | 1 | 20 | 600 | 11 | 450 |
| 4641-22-400 | 7314150383337 | 1 | 1 | 22 | 400 | 11 | 300 |
| 4641-24-400 | 7314150383344 | 1 | 1 | 24 | 400 | 11 | 300 |
| 4641-25-400 | 7314150383351 | 1 | 1 | 25 | 400 | 11 | 300 |

4641-PB

DRILL SET FOR MASONRY



FEATURES:

- Masonry drill for percussion drilling in concrete, brick, stone, ceramic tiles and marble etc
- Shank of low-alloy, hardened and tempered tool steel
- Black-oxidised surface with ground diameter
- Carbide tip ensures high drilling capacity and long-life
- High resistance to wear and torsion stresses


ASSORTMENT:

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| 4641-PB | 7314150383368 | 1 | 5 | 130 |

CHISELS FOR REINFORCED CONCRETE




26 PRODUCTS

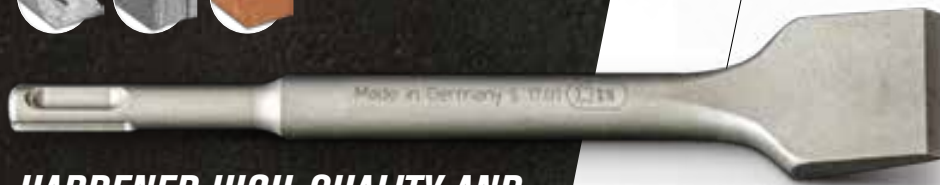


HARDENED HIGH-QUALITY AND WEAR-RESISTANT TOOL STEEL

CHISELS ARE AVAILABLE IN 10 DIFFERENT SHAPES FOR THE MOST DEMANDING APPLICATIONS

FITS DIRECTLY INTO THE MOST COMMON HAMMER MACHINES

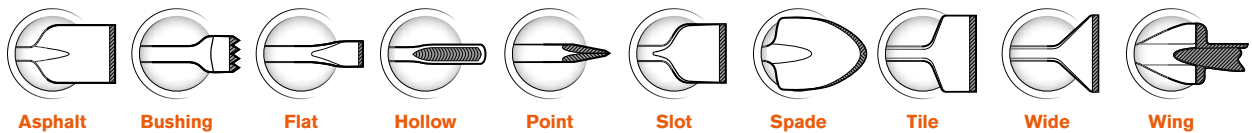

4659 SDS MAX CHISELS FOR REINFORCED CONCRETE



FEATURES:


- Use Application: Masonry, Reinforced Concrete, Natural Stone, Artificial Stone for light renovation and restoration chisel work
- Hardened high-quality and wear-resistant tool steel
- Point chisels are suitable for breakthroughs, wire slots and demolition work
- The flat chisel has a higher breaking power than point chisels, making well-directed use possible and allowing most demolition work and breakthroughs

- Scraping and spade chisels have a wider working tip which allows more materials to be removed, spades can also be used for removal of hard clay
- Hollow chisel, wing and wing canal are different versions created for the precise production of channels in masonry and concrete
- Tile chisel is ideal for removing tiles (floor and wall)
- Fits directly into all hammer drilling machines with SDS max holders

ASSORTMENT:

| | | | | A | B | D |
|-----------------|---------------|---|---|----|-----|---------|
| 4659-ASPHALT-40 | 7314150388080 | 1 | 1 | 90 | 400 | ASPHALT |
| 4659-BUSHING-24 | 7314150388097 | 1 | 1 | 45 | 240 | BUSHING |
| 4659-FLAT-28 | 7314150387922 | 1 | 1 | 24 | 280 | FLAT |
| 4659-FLAT-40 | 7314150387939 | 1 | 1 | 24 | 400 | FLAT |
| 4659-FLAT-60 | 7314150387946 | 1 | 1 | 24 | 600 | FLAT |
| 4659-HOLLOW-30 | 7314150387991 | 1 | 1 | 26 | 300 | HOLLOW |
| 4659-POINT-28 | 7314150387892 | 1 | 1 | | 280 | POINT |
| 4659-POINT-28-4 | 7314150388066 | 1 | 1 | 38 | 280 | POINT |
| 4659-POINT-40 | 7314150387908 | 1 | 1 | | 400 | POINT |

| | | | | A | B | D |
|-----------------|---------------|---|---|-----|-----|-------|
| 4659-POINT-60 | 7314150387915 | 1 | 1 | | 600 | POINT |
| 4659-SLOT-30-3 | 7314150388028 | 1 | 1 | 22 | 300 | SLOT |
| 4659-SPADE-40 | 7314150388073 | 1 | 1 | 110 | 400 | SPADE |
| 4659-TILE-30-5 | 7314150388042 | 1 | 1 | 50 | 300 | TILE |
| 4659-TILE-30-8 | 7314150388059 | 1 | 1 | 80 | 300 | TILE |
| 4659-WIDE-30-8 | 7314150387953 | 1 | 1 | 80 | 300 | WIDE |
| 4659-WIDE-35-11 | 7314150387977 | 1 | 1 | 115 | 350 | WIDE |
| 4659-WIDE-36-5 | 7314150387984 | 1 | 1 | 50 | 360 | WIDE |
| 4659-WING-C38-3 | 7314150388011 | 1 | 1 | 35 | 380 | WING |

**FEATURES:**

- Use Application: Masonry, Reinforced Concrete, Natural Stone, Artificial Stone for light chisel work in renovation and restoration
- Hardened high-quality and wear-resistant tool steel
- Point chisels are suitable for breakthroughs and wire slots as well as demolition work
- The flat chisel has a higher breaking power than point chisels, making well-directed use possible and the tool suitable for most demolition work
- Scraping and spade chisels have a wider working tip which helps to remove more materials, spades can also be used for removal of hard clay
- Hollow, wing and wing canal are all different versions of chisels that can be used for the precise production of channels in masonry and concrete
- Tile chisel is ideal for removing tiles (floor and wall)
- Fits directly into all hammer drilling machines with SDS-plus and HILTI TE-C drive

ASSORTMENT:

| | | | | A | B | D |
|-----------------|---------------|---|---|----|-----|--------|
| 4655-FLAT-250 | 7314150387823 | 1 | 1 | 20 | 250 | FLAT |
| 4655-HOLLOW-240 | 7314150387847 | 1 | 1 | 22 | 240 | HOLLOW |
| 4655-POINT-250 | 7314150387816 | 1 | 1 | | 250 | POINT |
| 4655-SLOT-25032 | 7314150387885 | 1 | 1 | 32 | 250 | SLOT |

| | | | | A | B | D |
|-----------------|---------------|---|---|----|-----|------|
| 4655-TILE-20040 | 7314150387861 | 1 | 1 | 38 | 200 | TILE |
| 4655-TILE-25060 | 7314150387878 | 1 | 1 | 60 | 250 | TILE |
| 4655-WIDE-20040 | 7314150387830 | 1 | 1 | 38 | 200 | WIDE |
| 4655-WING-C-250 | 7314150387854 | 1 | 1 | 22 | 250 | WING |

APPLICATION:
Concrete

PRODUCT:
SDS-plus Concrete Drill Bit



DRILL BITS FOR WOOD

86 PRODUCTS



AUGER DRILLS FOR WOOD



HEAT-TREATED ALL OVER FOR EXTREME DURABILITY

ONE SECTION OF THE SHANK HAS A HEXAGONAL SHANK FOR A FIRM GRIP IN THE CHUCK

SPIRALS WITH LEVIN PATTERN

MADE OF CHROME VANADIUM AND LACQUERED FOR RUST PROTECTION

FULL SCREW TIP

FULL LENGTH HEAT-TREATED FOR EXTREME DURABILITY

FLAT DRILLS FOR WOOD



POSITIVE CUTTING ANGLE FOR FASTER DRILLING


TWIST DRILLS FOR WOOD



LIP AND SPUR DRILL

9626

AUGER DRILLS FOR WOOD



FEATURES:





- Auger bit for drilling in wood
- One section of tang with hexagonal shank for firm grip in the chuck. Additional 15mm long section with four flat sides, suitable for hand braces





- Spirals with Levin pattern
- Lacquered for rust protection
- 460 mm long auger bit for drilling in wood

ASSORTMENT:

| | | | | A | B | C | D |
|---------|---------------|---|---|----|-----|------|-----|
| 9626-6 | 7314150388806 | 1 | 1 | 6 | 230 | 5.5 | 155 |
| 9626-7 | 7314150388813 | 1 | 1 | 7 | 230 | 6.5 | 155 |
| 9626-8 | 7314150388820 | 1 | 1 | 8 | 230 | 7.5 | 155 |
| 9626-9 | 7314150388837 | 1 | 1 | 9 | 230 | 8.5 | 155 |
| 9626-10 | 7314150388844 | 1 | 1 | 10 | 230 | 9.5 | 155 |
| 9626-11 | 7314150388851 | 1 | 1 | 11 | 230 | 10.5 | 155 |
| 9626-12 | 7314150388868 | 1 | 1 | 12 | 230 | 11.5 | 155 |
| 9626-13 | 7314150388875 | 1 | 1 | 13 | 230 | 12.5 | 155 |
| 9626-14 | 7314150388882 | 1 | 1 | 14 | 230 | 12.5 | 155 |
| 9626-16 | 7314150388899 | 1 | 1 | 16 | 230 | 12.5 | 155 |
| 9626-18 | 7314150388905 | 1 | 1 | 18 | 230 | 12.5 | 155 |
| 9626-20 | 7314150388912 | 1 | 1 | 20 | 230 | 12.5 | 155 |
| 9626-22 | 7314150388929 | 1 | 1 | 22 | 230 | 12.5 | 155 |
| 9626-23 | 7314150388936 | 1 | 1 | 23 | 230 | 12.5 | 155 |


| | | | | A | B | C | D |
|-------------|---------------|---|---|----|-----|------|-----|
| 9626-24 | 7314150388943 | 1 | 1 | 24 | 230 | 12.5 | 155 |
| 9626-25 | 7314150388950 | 1 | 1 | 25 | 230 | 12.5 | 155 |
| 9626-26 | 7314153024237 | 1 | 1 | 26 | 230 | 12.5 | 155 |
| 9626-28 | 7314150388967 | 1 | 1 | 28 | 230 | 12.5 | 155 |
| 9626-30 | 7314150388974 | 1 | 1 | 30 | 230 | 12.5 | 155 |
| 9626-32 | 7314150388981 | 1 | 1 | 32 | 230 | 12.5 | 155 |
| 9627-6-460 | 7314150388998 | 1 | 1 | 6 | 460 | 5.5 | 385 |
| 9627-8-460 | 7314150389001 | 1 | 1 | 8 | 460 | 7.5 | 385 |
| 9627-10-460 | 7314150389018 | 1 | 1 | 10 | 460 | 9.5 | 385 |
| 9627-12-460 | 7314150389025 | 1 | 1 | 12 | 460 | 11.5 | 385 |
| 9627-14-460 | 7314150389032 | 1 | 1 | 14 | 460 | 12.5 | 385 |
| 9627-16-460 | 7314150389049 | 1 | 1 | 16 | 460 | 12.5 | 385 |
| 9627-18-460 | 7314150389056 | 1 | 1 | 18 | 460 | 12.5 | 385 |
| 9627-20-460 | 7314150389063 | 1 | 1 | 20 | 460 | 12.5 | 385 |

|  |  |  |  | A | B | C | D |
|---|---|---|---|----|-----|------|-----|
| 9627-22-460 | 7314150389070 | 1 | 1 | 22 | 460 | 12.5 | 385 |
| 9627-24-460 | 7314150389087 | 1 | 1 | 24 | 460 | 12.5 | 385 |
| 9627-26-460 | 7314150389094 | 1 | 1 | 26 | 460 | 12.5 | 385 |

|  |  |  |  | A | B | C | D |
|---|---|---|---|----|-----|------|-----|
| 9627-28-460 | 7314150389100 | 1 | 1 | 28 | 460 | 12.5 | 385 |
| 9627-30-460 | 7314150389117 | 1 | 1 | 30 | 460 | 12.5 | 385 |
| 9627-32-460 | 7314150389124 | 1 | 1 | 32 | 460 | 12.5 | 385 |

9629

FLAT DRILLS FOR WOOD











FEATURES:

- The flat bit has a positive cutting angle for faster drilling than conventional bits

- High-carbon steel, heat treated all over. Hardened blade forged directly from the round shaft
- 400 mm long flat bit drill for drilling wood


ASSORTMENT:

|  |  |  |  | A | B | C | D |
|---|---|---|---|----|-----|------|----|
| 9629-6 | 7314150388417 | 1 | 1 | 6 | 152 | 6.35 | 38 |
| 9629-8 | 7314150388462 | 1 | 1 | 8 | 152 | 6.35 | 38 |
| 9629-10 | 7314150388479 | 1 | 1 | 10 | 152 | 6.35 | 38 |
| 9629-12 | 7314150388486 | 1 | 1 | 12 | 152 | 6.35 | 42 |
| 9629-14 | 7314150388493 | 1 | 1 | 14 | 152 | 6.35 | 42 |
| 9629-16 | 7314150388509 | 1 | 1 | 16 | 152 | 6.35 | 42 |
| 9629-18 | 7314150388516 | 1 | 1 | 18 | 152 | 6.35 | 42 |
| 9629-20 | 7314150388523 | 1 | 1 | 20 | 152 | 6.35 | 42 |
| 9629-22 | 7314150388530 | 1 | 1 | 22 | 152 | 6.35 | 42 |
| 9629-24 | 7314150388547 | 1 | 1 | 24 | 152 | 6.35 | 46 |
| 9629-25 | 7314150388554 | 1 | 1 | 25 | 152 | 6.35 | 46 |
| 9629-26 | 7314150388561 | 1 | 1 | 26 | 152 | 6.35 | 46 |
| 9629-28 | 7314150388578 | 1 | 1 | 28 | 152 | 6.35 | 46 |
| 9629-30 | 7314150388585 | 1 | 1 | 30 | 152 | 6.35 | 46 |
| 9629-32 | 7314150388592 | 1 | 1 | 32 | 152 | 6.35 | 46 |
| 9629-36 | 7314150388608 | 1 | 1 | 36 | 152 | 6.35 | 46 |

|  |  |  |  | A | B | C | D |
|---|---|---|---|----|-----|------|----|
| 9629-38 | 7314150388615 | 1 | 1 | 38 | 160 | 6.35 | 46 |
| 9629-40 | 7314150388622 | 1 | 1 | 40 | 160 | 6.35 | 46 |
| 9631-6-400 | 7314150388646 | 1 | 1 | 6 | 400 | 6.35 | 38 |
| 9631-8-400 | 7314150388677 | 1 | 1 | 8 | 400 | 6.35 | 38 |
| 9631-10-400 | 7314150388684 | 1 | 1 | 10 | 400 | 6.35 | 38 |
| 9631-12-400 | 7314150388691 | 1 | 1 | 12 | 400 | 6.35 | 42 |
| 9631-14-400 | 7314150388707 | 1 | 1 | 14 | 400 | 6.35 | 42 |
| 9631-16-400 | 7314150388714 | 1 | 1 | 16 | 400 | 6.35 | 42 |
| 9631-18-400 | 7314150388721 | 1 | 1 | 18 | 400 | 6.35 | 42 |
| 9631-20-400 | 7314150388738 | 1 | 1 | 20 | 400 | 6.35 | 42 |
| 9631-22-400 | 7314150388745 | 1 | 1 | 22 | 400 | 6.35 | 42 |
| 9631-26-400 | 7314150388769 | 1 | 1 | 26 | 400 | 6.35 | 46 |
| 9631-28-400 | 7314150388776 | 1 | 1 | 28 | 400 | 6.35 | 46 |
| 9631-30-400 | 7314150388783 | 1 | 1 | 30 | 400 | 6.35 | 46 |
| 9631-32-400 | 7314150388790 | 1 | 1 | 32 | 400 | 6.35 | 46 |
| 9631-24-400 | 7314150388752 | 1 | 1 | 24 | 400 | 6.35 | 46 |

9646

TWIST DRILLS FOR WOOD











FEATURES:

- Made of hardened and tempered, chrome-vanadium steel
- Precision ground

- 250 mm long Lip and Spur drill for drilling solid wood, chipboard and wood fibre board

ASSORTMENT:

|  |  |  |  | A | B | C | D |
|---|---|---|---|----|-----|------|----|
| 9646-3 | 7314150388189 | 1 | 1 | 3 | 61 | 3 | 33 |
| 9646-4 | 7314150388202 | 1 | 1 | 4 | 75 | 4 | 43 |
| 9646-5 | 7314150388219 | 1 | 1 | 5 | 86 | 5 | 52 |
| 9646-6 | 7314150388226 | 1 | 1 | 6 | 97 | 6 | 60 |
| 9646-7 | 7314150388233 | 1 | 1 | 7 | 109 | 7 | 69 |
| 9646-8 | 7314150388240 | 1 | 1 | 8 | 117 | 8 | 75 |
| 9646-9 | 7314150388257 | 1 | 1 | 9 | 125 | 9 | 80 |
| 9646-10 | 7314150388264 | 1 | 1 | 10 | 133 | 10 | 87 |
| 9646-11 | 7314150388288 | 1 | 1 | 11 | 142 | 9.95 | 89 |
| 9646-12 | 7314150388295 | 1 | 1 | 12 | 151 | 9.95 | 96 |

|  |  |  |  | A | B | C | D |
|---|---|---|---|----|-----|------|-----|
| 9646-13 | 7314150388301 | 1 | 1 | 13 | 151 | 9.95 | 96 |
| 9646-14 | 7314150388318 | 1 | 1 | 14 | 151 | 9.95 | 97 |
| 9646-15 | 7314150388325 | 1 | 1 | 15 | 160 | 9.95 | 100 |
| 9646-16 | 7314150388332 | 1 | 1 | 16 | 160 | 9.95 | 100 |
| 9646-18 | 7314150388349 | 1 | 1 | 18 | 180 | 9.95 | 120 |
| 9646-20 | 7314150388356 | 1 | 1 | 20 | 200 | 9.95 | 130 |
| 9646-6-250 | 7314150388363 | 1 | 1 | 6 | 250 | 6 | 200 |
| 9646-8-250 | 7314150388370 | 1 | 1 | 8 | 250 | 8 | 200 |
| 9646-10-250 | 7314150388387 | 1 | 1 | 10 | 250 | 10 | 200 |
| 9646-12-250 | 7314150388400 | 1 | 1 | 12 | 250 | 9.95 | 200 |

DRILL BITS FOR METAL

34 PRODUCTS



COBALT HSS-E DRILLS FOR METAL



5% COBALT FOR EXTRA DURABILITY

HEAT-TREATED ALL OVER FOR EXTREME DURABILITY

GROUND FLUTES ENABLES FAST DRILLING AND HIGH PRECISION

NO PRE-PUNCH THANKS TO THE INNOVATIVE SPEED POINT

CRAFTED WITH 5% COBALT FOR INCREASED HEAT RESISTANCE AND CUTTING PERFORMANCE



TOP ANGLE OF 135° WITH SELF-CENTRING SPLIT-POINT TIP

HSS-G DRILLS FOR METAL



GROUND FLUTES ENABLE FAST DRILLING AND HIGH PRECISION


HSS-R DRILLS FOR METAL



ROLLED FLUTE WITH HIGH ELASTICITY

4411

COBALT HSS-E DRILLS FOR METAL







FEATURES:





- The Cobalt High-speed steel (HSS) provides long-lasting high performance when drilling stainless steel materials
- Cobalt drills work brilliantly on alloyed and non-alloyed steel, stainless steel, cast iron, cast steel and acid and heat-resistant steels
- Ground flutes enable fast drilling and high precision
- Top angle of 135° with self-centring split-point tip for quick cutting and perfect centring
- Speed Point, no need to pre-punch or pilot drill up to 10mm diameter
- Drill bits have a cylindrical shank (shank equal to drill bit diameter) and are designed for use in drill stands and drivers
- Manufactured to DIN 338 N
- Size range 1mm to 13mm
- Size 1mm up to 4mm, two drills in each tube

ASSORTMENT:

| | | | | A | B | C | D |
|-----------|---------------|---|---|------|----|------|----|
| 4411-1.00 | 7314150372744 | 2 | 1 | 1 | 34 | 1 | 12 |
| 4411-1.50 | 7314150372768 | 2 | 1 | 1.5 | 40 | 1.5 | 18 |
| 4411-2.00 | 7314150372775 | 2 | 1 | 2 | 49 | 2 | 24 |
| 4411-2.50 | 7314150372782 | 2 | 1 | 2.5 | 57 | 2.5 | 30 |
| 4411-3.00 | 7314150372799 | 2 | 1 | 3 | 61 | 3 | 33 |
| 4411-3.25 | 7314150372805 | 2 | 1 | 3.25 | 65 | 3.25 | 36 |
| 4411-3.30 | 7314150372812 | 2 | 1 | 3.3 | 65 | 3.3 | 36 |
| 4411-3.50 | 7314150372829 | 2 | 1 | 3.5 | 70 | 3.5 | 39 |





| | | | | A | B | C | D |
|-----------|---------------|---|---|------|-----|------|----|
| 4411-4.00 | 7314150372836 | 2 | 1 | 4 | 75 | 4 | 43 |
| 4411-4.20 | 7314150372843 | 1 | 1 | 4.2 | 75 | 4.2 | 43 |
| 4411-4.25 | 7314150372850 | 1 | 1 | 4.25 | 75 | 4.25 | 43 |
| 4411-4.50 | 7314150372867 | 1 | 1 | 4.5 | 80 | 4.5 | 47 |
| 4411-5.00 | 7314150372874 | 1 | 1 | 5 | 86 | 5 | 52 |
| 4411-5.50 | 7314150372881 | 1 | 1 | 5.5 | 93 | 5.5 | 57 |
| 4411-6.00 | 7314150372898 | 1 | 1 | 6 | 93 | 6 | 57 |
| 4411-6.50 | 7314150372904 | 1 | 1 | 6.5 | 101 | 6.5 | 63 |





|  |  |  |  | A | B | C | D |
|---|---|---|---|-----|-----|-----|----|
| 4411-6.80 | 7314150372911 | 1 | 1 | 6.8 | 109 | 6.8 | 69 |
| 4411-7.00 | 7314150372928 | 1 | 1 | 7 | 109 | 7 | 69 |
| 4411-7.50 | 7314150372935 | 1 | 1 | 7.5 | 109 | 7.5 | 69 |
| 4411-8.00 | 7314150372942 | 1 | 1 | 8 | 117 | 8 | 75 |
| 4411-8.50 | 7314150372959 | 1 | 1 | 8.5 | 117 | 8.5 | 75 |
| 4411-9.00 | 7314150372966 | 1 | 1 | 9 | 125 | 9 | 81 |

|  |  |  |  | A | B | C | D |
|---|---|---|---|------|-----|------|-----|
| 4411-9.50 | 7314150394463 | 1 | 1 | 9.5 | 125 | 9.5 | 87 |
| 4411-10.00 | 7314150372973 | 1 | 1 | 10 | 125 | 10 | 87 |
| 4411-10.20 | 7314150372980 | 1 | 1 | 10.2 | 133 | 10.2 | 87 |
| 4411-11.00 | 7314150372997 | 1 | 1 | 11 | 142 | 11 | 94 |
| 4411-12.00 | 7314150373000 | 1 | 1 | 12 | 151 | 12 | 101 |
| 4411-13.00 | 7314150373017 | 1 | 1 | 13 | 151 | 13 | 101 |


INDUSTRIAL PACK:

- Size range 0.5 to 20mm
- In boxes of 10, 5 or 1, depending on dimensions

|  |  |  |  | A | B | C | D |
|---|---|---|---|------|-----|------|----|
| 4511-0.50-10P | 7314150373079 | 10 | 1 | 0.5 | 22 | 0.5 | 6 |
| 4511-0.75-10P | 7314150373062 | 10 | 1 | 0.75 | 28 | 0.75 | 9 |
| 4511-1.00-10P | 7314150373055 | 10 | 1 | 1 | 34 | 1 | 12 |
| 4511-1.50-10P | 7314150373086 | 10 | 1 | 1.5 | 40 | 1.5 | 18 |
| 4511-1.75-10P | 7314150373093 | 10 | 1 | 1.75 | 46 | 1.75 | 22 |
| 4511-2.00-10P | 7314150373109 | 10 | 1 | 2 | 49 | 2 | 24 |
| 4511-2.50-10P | 7314150373116 | 10 | 1 | 2.5 | 57 | 2.5 | 30 |
| 4511-2.70-10P | 7314150373123 | 10 | 1 | 2.7 | 61 | 2.7 | 33 |
| 4511-2.90-10P | 7314150373130 | 10 | 1 | 2.9 | 61 | 2.9 | 33 |
| 4511-3.00-10P | 7314150373147 | 10 | 1 | 3 | 61 | 3 | 33 |
| 4511-3.10-10P | 7314150373185 | 10 | 1 | 3.1 | 65 | 3.1 | 36 |
| 4511-3.25-10P | 7314150373192 | 10 | 1 | 3.25 | 65 | 3.25 | 36 |
| 4511-3.30-10P | 7314150373208 | 10 | 1 | 3.3 | 65 | 3.3 | 36 |
| 4511-3.50-10P | 7314150373215 | 10 | 1 | 3.5 | 70 | 3.5 | 39 |
| 4511-3.80-10P | 7314150373222 | 10 | 1 | 3.8 | 75 | 3.8 | 43 |
| 4511-4.00-10P | 7314150373239 | 10 | 1 | 4 | 75 | 4 | 43 |
| 4511-4.20-10P | 7314150373246 | 10 | 1 | 4.2 | 75 | 4.2 | 43 |
| 4511-4.50-10P | 7314150373253 | 10 | 1 | 4.5 | 80 | 4.5 | 47 |
| 4511-4.80-10P | 7314150373260 | 10 | 1 | 4.8 | 86 | 4.8 | 52 |
| 4511-5.00-10P | 7314150373277 | 10 | 1 | 5 | 86 | 5 | 52 |
| 4511-5.20-10P | 7314150373284 | 10 | 1 | 5.2 | 86 | 5.2 | 52 |
| 4511-5.50-10P | 7314150373291 | 10 | 1 | 5.5 | 93 | 5.5 | 57 |
| 4511-6.00-10P | 7314150373307 | 10 | 1 | 6 | 93 | 6 | 57 |
| 4511-6.20-10P | 7314150373314 | 10 | 1 | 6.2 | 101 | 6.2 | 63 |
| 4511-6.50-10P | 7314150373321 | 10 | 1 | 6.5 | 101 | 6.5 | 63 |
| 4511-6.80-10P | 7314150373338 | 10 | 1 | 6.8 | 109 | 6.8 | 69 |
| 4511-7.00-10P | 7314150373345 | 10 | 1 | 7 | 109 | 7 | 69 |
| 4511-7.20-10P | 7314150373352 | 10 | 1 | 7.2 | 109 | 7.2 | 69 |
| 4511-7.50-10P | 7314150373369 | 10 | 1 | 7.5 | 109 | 7.5 | 69 |
| 4511-7.80-10P | 7314150373376 | 10 | 1 | 7.8 | 117 | 7.8 | 75 |
| 4511-8.00-10P | 7314150373383 | 10 | 1 | 8 | 117 | 8 | 75 |
| 4511-8.50-10P | 7314150373390 | 10 | 1 | 8.5 | 117 | 8.5 | 75 |

|  |  |  |  | A | B | C | D |
|---|---|---|---|-------|-----|-------|-----|
| 4511-8.60-10P | 7314150373406 | 10 | 1 | 8.6 | 125 | 8.6 | 81 |
| 4511-8.80-10P | 7314150373413 | 10 | 1 | 8.8 | 125 | 8.8 | 81 |
| 4511-9.00-10P | 7314150373420 | 10 | 1 | 9 | 125 | 9 | 81 |
| 4511-9.20-10P | 7314150373437 | 10 | 1 | 9.2 | 125 | 9.2 | 81 |
| 4511-9.50-10P | 7311518339081 | 10 | 1 | 9.5 | 125 | 9.5 | 81 |
| 4511-9.60-10P | 7314150373451 | 10 | 1 | 9.6 | 133 | 9.6 | 87 |
| 4511-10.00-5P | 7314150392247 | 5 | 1 | 10 | 133 | 10 | 87 |
| 4511-10.20-5P | 7314150392254 | 5 | 1 | 10.2 | 133 | 10.2 | 87 |
| 4511-10.30-5P | 7314150392261 | 5 | 1 | 10.30 | 133 | 10.30 | 87 |
| 4511-10.50-5P | 7314150392278 | 5 | 1 | 10.5 | 133 | 10.5 | 87 |
| 4511-10.80-5P | 7314150392285 | 5 | 1 | 10.8 | 142 | 10.8 | 94 |
| 4511-11.00-5P | 7314150392292 | 5 | 1 | 11 | 142 | 11 | 94 |
| 4511-11.50-5P | 7314150392308 | 5 | 1 | 11.5 | 142 | 11.5 | 94 |
| 4511-12.00-5P | 7314150392315 | 5 | 1 | 12 | 151 | 12 | 101 |
| 4511-12.50-5P | 7314150392322 | 5 | 1 | 12.5 | 151 | 12.5 | 101 |
| 4511-12.80-5P | 7314150392339 | 5 | 1 | 12.8 | 151 | 12.8 | 101 |
| 4511-13.00-5P | 7314150392346 | 5 | 1 | 13 | 151 | 13 | 101 |
| 4511-13.50-1P | 7314150392353 | 1 | 1 | 13.5 | 160 | 13.5 | 108 |
| 4511-14.00-1P | 7314150392360 | 1 | 1 | 14 | 160 | 14 | 108 |
| 4511-14.50-1P | 7314150392377 | 1 | 1 | 14.5 | 169 | 14.5 | 114 |
| 4511-15.00-1P | 7314150392384 | 1 | 1 | 15 | 169 | 15 | 114 |
| 4511-15.50-1P | 7314150392391 | 1 | 1 | 15.5 | 169 | 15.5 | 120 |
| 4511-16.00-1P | 7314150392407 | 1 | 1 | 16 | 178 | 16 | 120 |
| 4511-16.50-1P | 7314150392414 | 1 | 1 | 16.5 | 184 | 16.5 | 125 |
| 4511-17.00-1P | 7314150392421 | 1 | 1 | 17 | 184 | 17 | 125 |
| 4511-17.50-1P | 7314150392438 | 1 | 1 | 17.5 | 191 | 17.5 | 130 |
| 4511-18.00-1P | 7314150392445 | 1 | 1 | 18 | 191 | 18 | 130 |
| 4511-18.50-1P | 7314150392452 | 1 | 1 | 18.5 | 198 | 18.5 | 135 |
| 4511-19.00-1P | 7314150392469 | 1 | 1 | 19 | 198 | 19 | 135 |
| 4511-19.50-1P | 7314150392476 | 1 | 1 | 19.5 | 205 | 19.5 | 140 |
| 4511-20.00-1P | 7314150392483 | 1 | 1 | 20 | 205 | 20 | 140 |

HSS-G DRILLS FOR METAL



FEATURES:

- High-speed steel (HSS) drill for drilling in bronze, brass, carbon steel, cast iron, alloy steel and stainless steel
- Ground flutes enable fast drilling and high precision
- Top angle of 130° with self-centring split-point tip for quick cutting and perfect centring
- Speed Point, no need to pre-punch or pilot drill up to 10mm diameter

- Drill bits have a cylindrical shank (shank equal to drill bit diameter) and are designed for use in drill stands and drivers
- Manufactured to DIN 338 N
- Size range 1mm to 13mm
- Size 1mm up to 4mm, two drills in each tube

ASSORTMENT:

| | | | | A | B | C | D |
|-----------|---------------|---|---|------|----|------|----|
| 4413-1.00 | 7314150371754 | 2 | 1 | 1 | 34 | 1 | 12 |
| 4413-1.50 | 7314150371761 | 2 | 1 | 1.5 | 40 | 1.5 | 18 |
| 4413-2.00 | 7314150371785 | 2 | 1 | 2 | 49 | 2 | 24 |
| 4413-2.50 | 7314150371792 | 2 | 1 | 2.5 | 57 | 2.5 | 30 |
| 4413-3.00 | 7314150371815 | 2 | 1 | 3 | 61 | 3 | 33 |
| 4413-3.25 | 7314150371822 | 2 | 1 | 3.25 | 65 | 3.25 | 36 |
| 4413-3.30 | 7314150371877 | 2 | 1 | 3.3 | 65 | 3.3 | 36 |
| 4413-3.50 | 7314150371884 | 2 | 1 | 3.5 | 70 | 3.5 | 39 |
| 4413-4.00 | 7314150371891 | 2 | 1 | 4 | 75 | 4 | 43 |
| 4413-4.20 | 7314150371907 | 1 | 1 | 4.2 | 75 | 4.2 | 43 |
| 4413-4.25 | 7314150371914 | 1 | 1 | 4.25 | 75 | 4.25 | 43 |
| 4413-4.50 | 7314150371921 | 1 | 1 | 4.5 | 80 | 4.5 | 47 |
| 4413-5.00 | 7314150371938 | 1 | 1 | 5 | 86 | 5 | 52 |
| 4413-5.50 | 7314150371945 | 1 | 1 | 5.5 | 93 | 5.5 | 57 |





| | | | | A | B | C | D |
|------------|---------------|---|---|------|-----|------|-----|
| 4413-6.00 | 7314150371952 | 1 | 1 | 6 | 93 | 6 | 57 |
| 4413-6.50 | 7314150371969 | 1 | 1 | 6.5 | 101 | 6.5 | 63 |
| 4413-6.80 | 7314150371976 | 1 | 1 | 6.8 | 109 | 6.8 | 69 |
| 4413-7.00 | 7314150371983 | 1 | 1 | 7 | 109 | 7 | 69 |
| 4413-7.50 | 7314150371990 | 1 | 1 | 7.5 | 109 | 7.5 | 69 |
| 4413-8.00 | 7314150372003 | 1 | 1 | 8 | 117 | 8 | 75 |
| 4413-8.50 | 7314150372010 | 1 | 1 | 8.5 | 117 | 8.5 | 75 |
| 4413-9.00 | 7314150372027 | 1 | 1 | 9 | 125 | 9 | 81 |
| 4413-9.50 | 7314150394456 | 1 | 1 | 9.5 | 125 | 9.5 | 87 |
| 4413-10.00 | 7314150372034 | 1 | 1 | 10 | 133 | 10 | 87 |
| 4413-10.20 | 7314150372041 | 1 | 1 | 10.2 | 133 | 10.2 | 87 |
| 4413-11.00 | 7314150372058 | 1 | 1 | 11 | 142 | 11 | 94 |
| 4413-12.00 | 7314150372065 | 1 | 1 | 12 | 151 | 12 | 101 |
| 4413-13.00 | 7314150372072 | 1 | 1 | 13 | 151 | 13 | 101 |





INDUSTRIAL PACK:

- Size range 1 to 20mm
- In boxes of 10, 5 or 1, depending on dimensions

| | | | | A | B | C | D |
|---------------|---------------|----|---|------|----|------|----|
| 4513-1.00-10P | 7314150372119 | 10 | 1 | 1 | 34 | 1 | 12 |
| 4513-1.50-10P | 7314150372126 | 10 | 1 | 1.5 | 40 | 1.5 | 18 |
| 4513-1.75-10P | 7314150372133 | 10 | 1 | 1.75 | 46 | 1.75 | 22 |
| 4513-2.00-10P | 7314150372140 | 10 | 1 | 2 | 49 | 2 | 24 |
| 4513-2.50-10P | 7314150372157 | 10 | 1 | 2.5 | 57 | 2.5 | 30 |
| 4513-2.70-10P | 7314150372164 | 10 | 1 | 2.7 | 61 | 2.7 | 33 |
| 4513-2.90-10P | 7314150372171 | 10 | 1 | 2.9 | 61 | 2.9 | 33 |
| 4513-3.00-10P | 7314150372188 | 10 | 1 | 3 | 61 | 3 | 33 |
| 4513-3.10-10P | 7314150372195 | 10 | 1 | 3.1 | 65 | 3.1 | 36 |
| 4513-3.25-10P | 7314150372201 | 10 | 1 | 3.25 | 65 | 3.25 | 36 |
| 4513-3.30-10P | 7314150372218 | 10 | 1 | 3.3 | 65 | 3.3 | 36 |
| 4513-3.50-10P | 7314150372225 | 10 | 1 | 3.5 | 70 | 3.5 | 39 |
| 4513-3.80-10P | 7314150372232 | 10 | 1 | 3.8 | 75 | 3.8 | 43 |
| 4513-4.00-10P | 7314150372249 | 10 | 1 | 4 | 75 | 4 | 43 |
| 4513-4.20-10P | 7314150372256 | 10 | 1 | 4.2 | 75 | 4.2 | 43 |
| 4513-4.50-10P | 7314150372263 | 10 | 1 | 4.5 | 80 | 4.5 | 47 |
| 4513-4.80-10P | 7314150372270 | 10 | 1 | 4.8 | 86 | 4.8 | 52 |
| 4513-5.00-10P | 7314150372287 | 10 | 1 | 5 | 86 | 5 | 52 |
| 4513-5.20-10P | 7314150372294 | 10 | 1 | 5.2 | 86 | 5.2 | 52 |
| 4513-5.50-10P | 7314150372300 | 10 | 1 | 5.5 | 93 | 5.5 | 57 |
| 4513-6.00-10P | 7314150372317 | 10 | 1 | 6 | 93 | 6 | 57 |

| | | | | A | B | C | D |
|---------------|---------------|----|---|------|-----|------|----|
| 4513-6.20-10P | 7314150372324 | 10 | 1 | 6.2 | 101 | 6.2 | 63 |
| 4513-6.50-10P | 7314150372331 | 10 | 1 | 6.5 | 101 | 6.5 | 63 |
| 4513-6.80-10P | 7314150372348 | 10 | 1 | 6.8 | 109 | 6.8 | 69 |
| 4513-7.00-10P | 7314150372355 | 10 | 1 | 7 | 109 | 7 | 69 |
| 4513-7.20-10P | 7314150372362 | 10 | 1 | 7.2 | 109 | 7.2 | 69 |
| 4513-7.50-10P | 7314150372379 | 10 | 1 | 7.5 | 109 | 7.5 | 69 |
| 4513-7.80-10P | 7314150372386 | 10 | 1 | 7.8 | 117 | 7.8 | 75 |
| 4513-8.00-10P | 7314150372393 | 10 | 1 | 8 | 117 | 8 | 75 |
| 4513-8.50-10P | 7314150372409 | 10 | 1 | 8.5 | 117 | 8.5 | 75 |
| 4513-8.60-10P | 7314150372416 | 10 | 1 | 8.6 | 125 | 8.6 | 81 |
| 4513-8.80-10P | 7314150372423 | 10 | 1 | 8.8 | 125 | 8.8 | 81 |
| 4513-9.00-10P | 7314150372430 | 10 | 1 | 9 | 125 | 9 | 81 |
| 4513-9.20-10P | 7314150372447 | 10 | 1 | 9.2 | 125 | 9.2 | 81 |
| 4513-9.50-10P | 7314150372454 | 10 | 1 | 9.5 | 125 | 9.5 | 81 |
| 4513-9.60-10P | 7314150372461 | 10 | 1 | 9.6 | 133 | 9.6 | 87 |
| 4513-10.00-5P | 7314150391998 | 5 | 1 | 10 | 133 | 10 | 87 |
| 4513-10.20-5P | 7314150392001 | 5 | 1 | 10.2 | 133 | 10.2 | 87 |
| 4513-10.30-5P | 7314150392018 | 5 | 1 | 10.3 | 133 | 10.3 | 87 |
| 4513-10.50-5P | 7314150392025 | 5 | 1 | 10.5 | 133 | 10.5 | 87 |
| 4513-10.80-5P | 7314150392032 | 5 | 1 | 10.8 | 142 | 10.8 | 94 |
| 4513-11.00-5P | 7314150392049 | 5 | 1 | 11 | 142 | 11 | 94 |

|  |  |  |  | A | B | C | D |
|---|---|---|---|------|-----|------|-----|
| 4513-11.50-5P | 7314150392056 | 5 | 1 | 11.5 | 142 | 11.5 | 94 |
| 4513-12.00-5P | 7314150392063 | 5 | 1 | 12 | 151 | 12 | 101 |
| 4513-12.50-5P | 7314150392070 | 5 | 1 | 12.5 | 151 | 12.5 | 101 |
| 4513-12.80-5P | 7314150392087 | 5 | 1 | 12.8 | 151 | 12.8 | 101 |
| 4513-13.00-5P | 7314150392094 | 5 | 1 | 13 | 151 | 13 | 101 |
| 4513-13.50-1P | 7314150392100 | 1 | 1 | 13.5 | 160 | 13.5 | 108 |
| 4513-14.00-1P | 7314150392117 | 1 | 1 | 14 | 160 | 14 | 108 |
| 4513-14.50-1P | 7314150392124 | 1 | 1 | 14.5 | 169 | 14.5 | 114 |
| 4513-15.00-1P | 7314150392131 | 1 | 1 | 15 | 169 | 15 | 114 |
| 4513-15.50-1P | 7314150392148 | 1 | 1 | 15.5 | 169 | 15.5 | |

|  |  |  |  | A | B | C | D |
|---|---|---|---|------|-----|------|-----|
| 4513-16.00-1P | 7314150392155 | 1 | 1 | 16 | 178 | 16 | 120 |
| 4513-16.50-1P | 7314150392162 | 1 | 1 | 16.5 | 184 | 16.5 | 125 |
| 4513-17.00-1P | 7314150392179 | 1 | 1 | 17 | 184 | 17 | 125 |
| 4513-17.50-1P | 7314150392186 | 1 | 1 | 17.5 | 191 | 17.5 | 130 |
| 4513-18.00-1P | 7314150392193 | 1 | 1 | 18 | 191 | 18 | 130 |
| 4513-18.50-1P | 7314150392209 | 1 | 1 | 18.5 | 198 | 18.5 | 135 |
| 4513-19.00-1P | 7314150392216 | 1 | 1 | 19 | 198 | 19 | 135 |
| 4513-19.50-1P | 7314150392223 | 1 | 1 | 19.5 | 205 | 19.5 | 140 |
| 4513-20.00-1P | 7314150392230 | 1 | 1 | 20 | 205 | 20 | 140 |

4415

HSS-R DRILLS FOR METAL











FEATURES:

- High-speed steel (HSS) drill for drilling in bronze, brass, carbon steel, cast iron, alloy steel and stainless steel
- Rolled flute with high elasticity and a low risk of breakage due to the manufacturing process
- Oxide coating reduces wear with good and rapid chip removal

- Drill bits have a cylindrical shank (shank equal to drill bit diameter) and are designed for use in drill stands and drill drivers
- Manufactured to DIN 338
- Size range 1mm to 13mm
- Size 1mm up to 4mm, two drills in each tube

ASSORTMENT:

|  |  |  |  | A | B | C | D |
|---|---|---|---|------|----|------|----|
| 4415-1.00 | 7314150394210 | 2 | 1 | 1 | 34 | 1 | 12 |
| 4415-1.50 | 7314150394227 | 2 | 1 | 1.5 | 40 | 1.5 | 18 |
| 4415-2.00 | 7314150394234 | 2 | 1 | 2 | 49 | 2 | 24 |
| 4415-2.50 | 7314150394241 | 2 | 1 | 2.5 | 57 | 2.5 | 30 |
| 4415-3.00 | 7314150394258 | 2 | 1 | 3 | 61 | 3 | 33 |
| 4415-3.25 | 7314150394265 | 2 | 1 | 3.25 | 65 | 3.25 | 36 |
| 4415-3.50 | 7314150394272 | 2 | 1 | 3.5 | 70 | 3.5 | 39 |
| 4415-4.00 | 7314150394289 | 2 | 1 | 4 | 75 | 4 | 43 |
| 4415-4.25 | 7314150394296 | 1 | 1 | 4.25 | 75 | 4.25 | 43 |
| 4415-4.50 | 7314150394302 | 1 | 1 | 4.5 | 80 | 4.5 | 47 |
| 4415-5.00 | 7314150394319 | 1 | 1 | 5 | 86 | 5 | 52 |
| 4415-5.50 | 7314150394326 | 1 | 1 | 5.5 | 93 | 5.5 | 57 |

|  |  |  |  | A | B | C | D |
|---|---|---|---|-----|-----|-----|-----|
| 4415-6.00 | 7314150394333 | 1 | 1 | 6 | 93 | 6 | 57 |
| 4415-6.50 | 7314150394340 | 1 | 1 | 6.5 | 101 | 6.5 | 63 |
| 4415-7.00 | 7314150394357 | 1 | 1 | 7 | 109 | 7 | 69 |
| 4415-7.50 | 7314150394364 | 1 | 1 | 7.5 | 109 | 7.5 | 69 |
| 4415-8.00 | 7314150394371 | 1 | 1 | 8 | 117 | 8 | 75 |
| 4415-8.50 | 7314150394388 | 1 | 1 | 8.5 | 117 | 8.5 | 75 |
| 4415-9.00 | 7314150394395 | 1 | 1 | 9 | 125 | 9 | 81 |
| 4415-10.00 | 7314150394401 | 1 | 1 | 10 | 133 | 10 | 87 |
| 4415-11.00 | 7314150394418 | 1 | 1 | 11 | 142 | 11 | 94 |
| 4415-12.00 | 7314150394425 | 1 | 1 | 12 | 151 | 12 | 101 |
| 4415-13.00 | 7314150394432 | 1 | 1 | 13 | 151 | 13 | 101 |

4513-SET-19 / 25

HSS-G DRILL SET FOR METAL - 19 / 25 PCS



FEATURES:

- High-speed steel (HSS) drill for bronze, brass, carbon steel, cast iron, alloy steel and stainless steel
- Ground flutes enable fast drilling and high precision
- Top angle of 130° with self-centring split-point tip for quick cutting and perfect centring
- Speed Point, no need to pre-punch or pilot drill up to 10mm diameter
- Drill bits have a cylindrical shank (shank equal to drill bit diameter) designed for use in drill stands and drivers
- Manufactured to DIN 338 N
- Size range 0.5 to 20mm
- Contains 19 or 25 drills from 1.0mm to 10.0mm x 0.5mm in a plastic case

ASSORTMENT:

| 4513-SET-19 | 7314150372096 | 1 | 19 | 600 |
|-------------|---------------|---|----|------|
| 4513-SET-25 | 7314150372102 | 1 | 25 | 1300 |

4515-SET-19

HSS-R DRILL SET FOR METAL - 19 PCS



FEATURES:

- High-speed steel (HSS) drill for bronze, brass, carbon steel, cast iron, alloy steel and stainless steel
- Rolled flute with high elasticity and a low risk of breakage due to the manufacturing process
- Oxide coating reduces wear with good and rapid chip removal
- Drill bits have a cylindrical shank (shank equal to drill bit diameter) designed for use in drill stands and drivers
- Manufactured to DIN 338
- Contains 19 drills from 1.0mm to 10.0mm x 0.5mm in a plastic case

ASSORTMENT:

| 4515-SET-19 | 7314150394449 | 1 | 19 | 600 |
|-------------|---------------|---|----|-----|

4513-SET-6

HSS-G DRILL SET FOR METAL - 6 PCS



FEATURES:

- High-speed steel (HSS) drill for bronze, brass, carbon steel, cast iron, alloy steel and stainless steel
- Ground flutes enable fast drilling and high precision
- Top angle of 130° with self-centring split-point tip for quick cutting and perfect centring
- Speed Point, no need to pre-punch or pilot drill up to 10mm diameter
- Drill bits have a cylindrical shank (shank equal to drill bit diameter) designed for use in drill stands and drivers
- Manufactured to DIN 338 N
- Contains 6 drills from 2.0mm to 8.0mm x 1.0mm (excl. 7.0mm) in a plastic cassette

ASSORTMENT:

| 4513-SET-6 | 7314150372089 | 1 | 6 | 130 |
|------------|---------------|---|---|-----|

4511-SET-19

COBALT HSS-E DRILL SET FOR METAL - 19 PCS



FEATURES:

- The Cobalt High-speed steel (HSS) provides long lasting high performance when drilling in stainless steel materials
- Cobalt drills work effectively with alloyed and non-alloyed steel, stainless steel, cast iron, cast steel and acid and heat-resistant steels
- Ground flutes enable fast drilling and high precision
- Top angle of 135° with self-centring split-point tip for quick cutting and perfect centring
- Speed Point, no need to pre-punch or pilot drill up to 10mm diameter
- Drill bits have a cylindrical shank (shank equal to drill bit diameter) designed for use in drill stands and drivers
- Manufactured to DIN 338 N
- Size range 0.5mm to 20mm
- Contains 19 drills from 1.0mm to 10.0mm x 0.5mm in a plastic case

ASSORTMENT:

| 4511-SET-19 | 7314150373031 | 1 | 19 | 600 |
|-------------|---------------|---|----|-----|

4511-SET-25**COBALT HSS-E DRILL SET
FOR METAL - 25 PCS****FEATURES:**

- The Cobalt High-speed steel (HSS) provides long-lasting high performance when drilling in stainless steel materials
- Cobalt drills work effectively with alloyed and non-alloyed steel, stainless steel, cast iron, cast steel and acid and heat-resistant steels
- Ground flutes enable fast drilling and high precision
- Top angle of 135° with self-centring split-point tip for quick cutting and perfect centring
- Speed Point, no need to pre-punch or pilot drill up to 10mm diameter
- Drill bits have a cylindrical shank (shank equal to drill bit diameter) designed for use in drill stands and drivers
- Manufactured to DIN 338 N
- Size range 0.5mm to 20mm
- Contains 25 drills from 1.0mm to 13.0mm x 0.5mm in a plastic case

ASSORTMENT:

| | | | | |
|-------------|---------------|---|----|------|
| | | | | |
| 4511-SET-25 | 7314150373048 | 1 | 25 | 1300 |

4511-SET-6**COBALT HSS-E DRILL SET
FOR METAL - 6 PCS****FEATURES:**


- The Cobalt High-speed steel (HSS) provides long-lasting high performance when drilling in stainless steel materials
- Cobalt drills work effectively with alloyed and non-alloyed steel, stainless steel, cast iron, cast steel and acid and heat-resistant steels
- Ground flutes enable fast drilling and high precision
- Top angle of 135° with self-centring split-point tip for quick cutting and perfect centring
- Speed Point, no need to pre-punch or pilot drill up to 10mm diameter
- Drill bits have a cylindrical shank (shank equal to drill bit diameter) and are designed for use in drill stands and drivers
- Manufactured to DIN 338 N
- Size range 0.5mm to 20mm
- Contains 6 drills from 2.0 to 8.0mm x 1.0mm (excl. 7.0mm) in a plastic cassette

ASSORTMENT:

| | | | | |
|------------|---------------|---|---|-----|
| | | | | |
| 4511-SET-6 | 7314150373024 | 1 | 6 | 130 |

STEP DRILL BITS

5 PRODUCTS

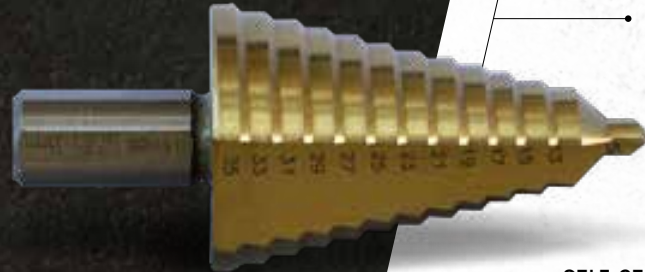

5x

LASTS UP TO FIVE TIMES LONGER THAN ORDINARY STEP DRILL BITS

TITANIUM-NITRIDE (TiN) COATING WITH A SURFACE HARDNESS

SELF-LUBRICATES WHILE RUNNING DRY





SELF-CENTRING POINT

LASTS UP TO 5 TIMES LONGER!

228-SD

STEP DRILL - 4 TO 12 MM



FEATURES:

- For making holes in thin metal sheets
- Titanium-nitride-coated step drill with a surface hardness that makes the tool last 4 to 5 times longer than ordinary step drill bits. That same surface reduces friction, resulting

in a tool that runs cooler and, in effect, self-lubricates while running dry


- Drills holes from 4 to 12 mm in 1 mm increments
- Shank 1/4" (6 mm)

ASSORTMENT:

| | | | | A | B | C | D | |
|--------|---------------|---|----|----------------------|----|---|----|----|
| 228-SD | 7311518277048 | 1 | 24 | 4-5-6-7-8-9-10-11-12 | 76 | 6 | 40 | 70 |

229-SD

STEP DRILL - 4 TO 22 MM





ASSORTMENT:

| | | | | A | B | C | D | |
|--------|---------------|---|----|----------------------------|----|---|----|----|
| 229-SD | 7311518277055 | 1 | 24 | 4-6-8-10-12-14-16-18-20-22 | 76 | 6 | 40 | 70 |

230-SD

STEP DRILL - 5 TO 35 MM




ASSORTMENT:

| | | | | A | B | C | D | |
|--------|---------------|---|---|---------------------------------------|----|------|----|-----|
| 230-SD | 7311518280956 | 1 | 1 | 5-13-15-17-19-21-23-25-27-29-31-33-35 | 83 | 12,7 | 58 | 175 |

232-SD

STEP DRILL - 6 TO 37 MM




ASSORTMENT:

| | | | | A | B | C | D | |
|--------|---------------|---|---|---|-----|----|----|-----|
| 232-SD | 7314150214839 | 1 | 1 | 6-9-12.5-15.2-18.6-20.4-22.5-26-28.3-30.5-34-37 | 100 | 10 | 75 | 300 |

234-SD

STEP DRILL - 6.5 TO 40.5 MM



ASSORTMENT:

| | | | | A | B | C | D | |
|--------|---------------|---|---|--|----|----|----|-----|
| 234-SD | 7314150214846 | 1 | 1 | 6.5-8.5-10.5-12.5-16.5-20.5-25.5-29-32.5-36.5-40.5 | 96 | 10 | 71 | 300 |

228-SET-SD

HSS STEP DRILLS SET - 3 PCS







FEATURES:


- For making holes in thin metal sheets
- Titanium-nitride-coated step drill with a surface hardness that makes the tool last 4 to 5 times longer than an ordinary step drill bit
- 3 piece HSS step drill set contents 4 to 12 mm in 1 mm increments
- 4 to 22 mm in 2 mm increments
- 5 to 35 mm in 2 mm increments

ASSORTMENT:

| 228-SET-SD | 7314150217946 | 1 | 1 | 560 |
|------------|---------------|---|---|-----|



687

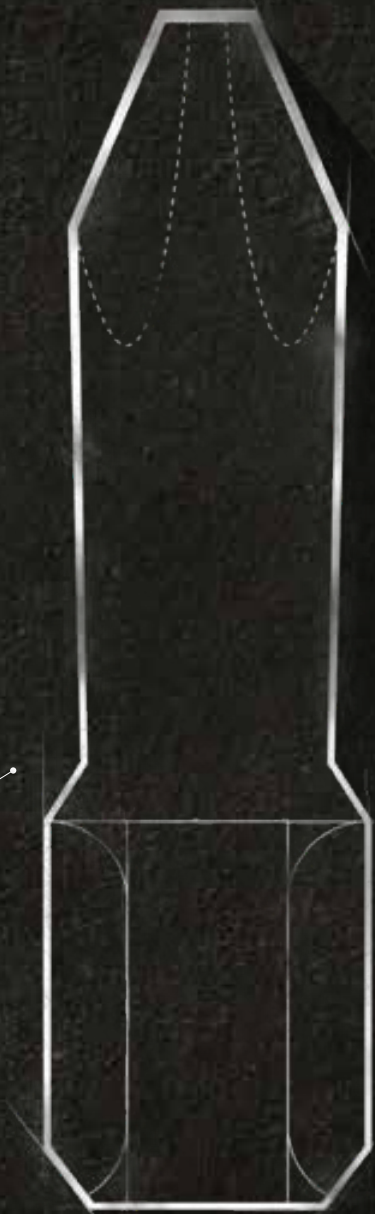




SCREWDRIVER BITS

687
PRODUCTS


PRODUCT INDEX

| | |
|--|-----|
| <i>DIAMOND SCREWDRIVER BITS</i> | 128 |
| <i>TIN TORSION SCREWDRIVER BITS</i> | 130 |
| <i>ACR TORSION SCREWDRIVER BITS</i> | 132 |
| <i>TORSION SCREWDRIVER BITS</i> | 133 |
| <i>EXTRA HARD TORSION SCREWDRIVER BITS</i> | 136 |
| <i>STAINLESS STEEL TORSION SCREWDRIVER BITS</i> | 138 |
| <i>STANDARD SCREWDRIVER BITS</i> | 140 |
| <i>SCREWDRIVER BIT HOLDERS, POWER NUT DRIVERS AND ADAPTORS</i> | 158 |

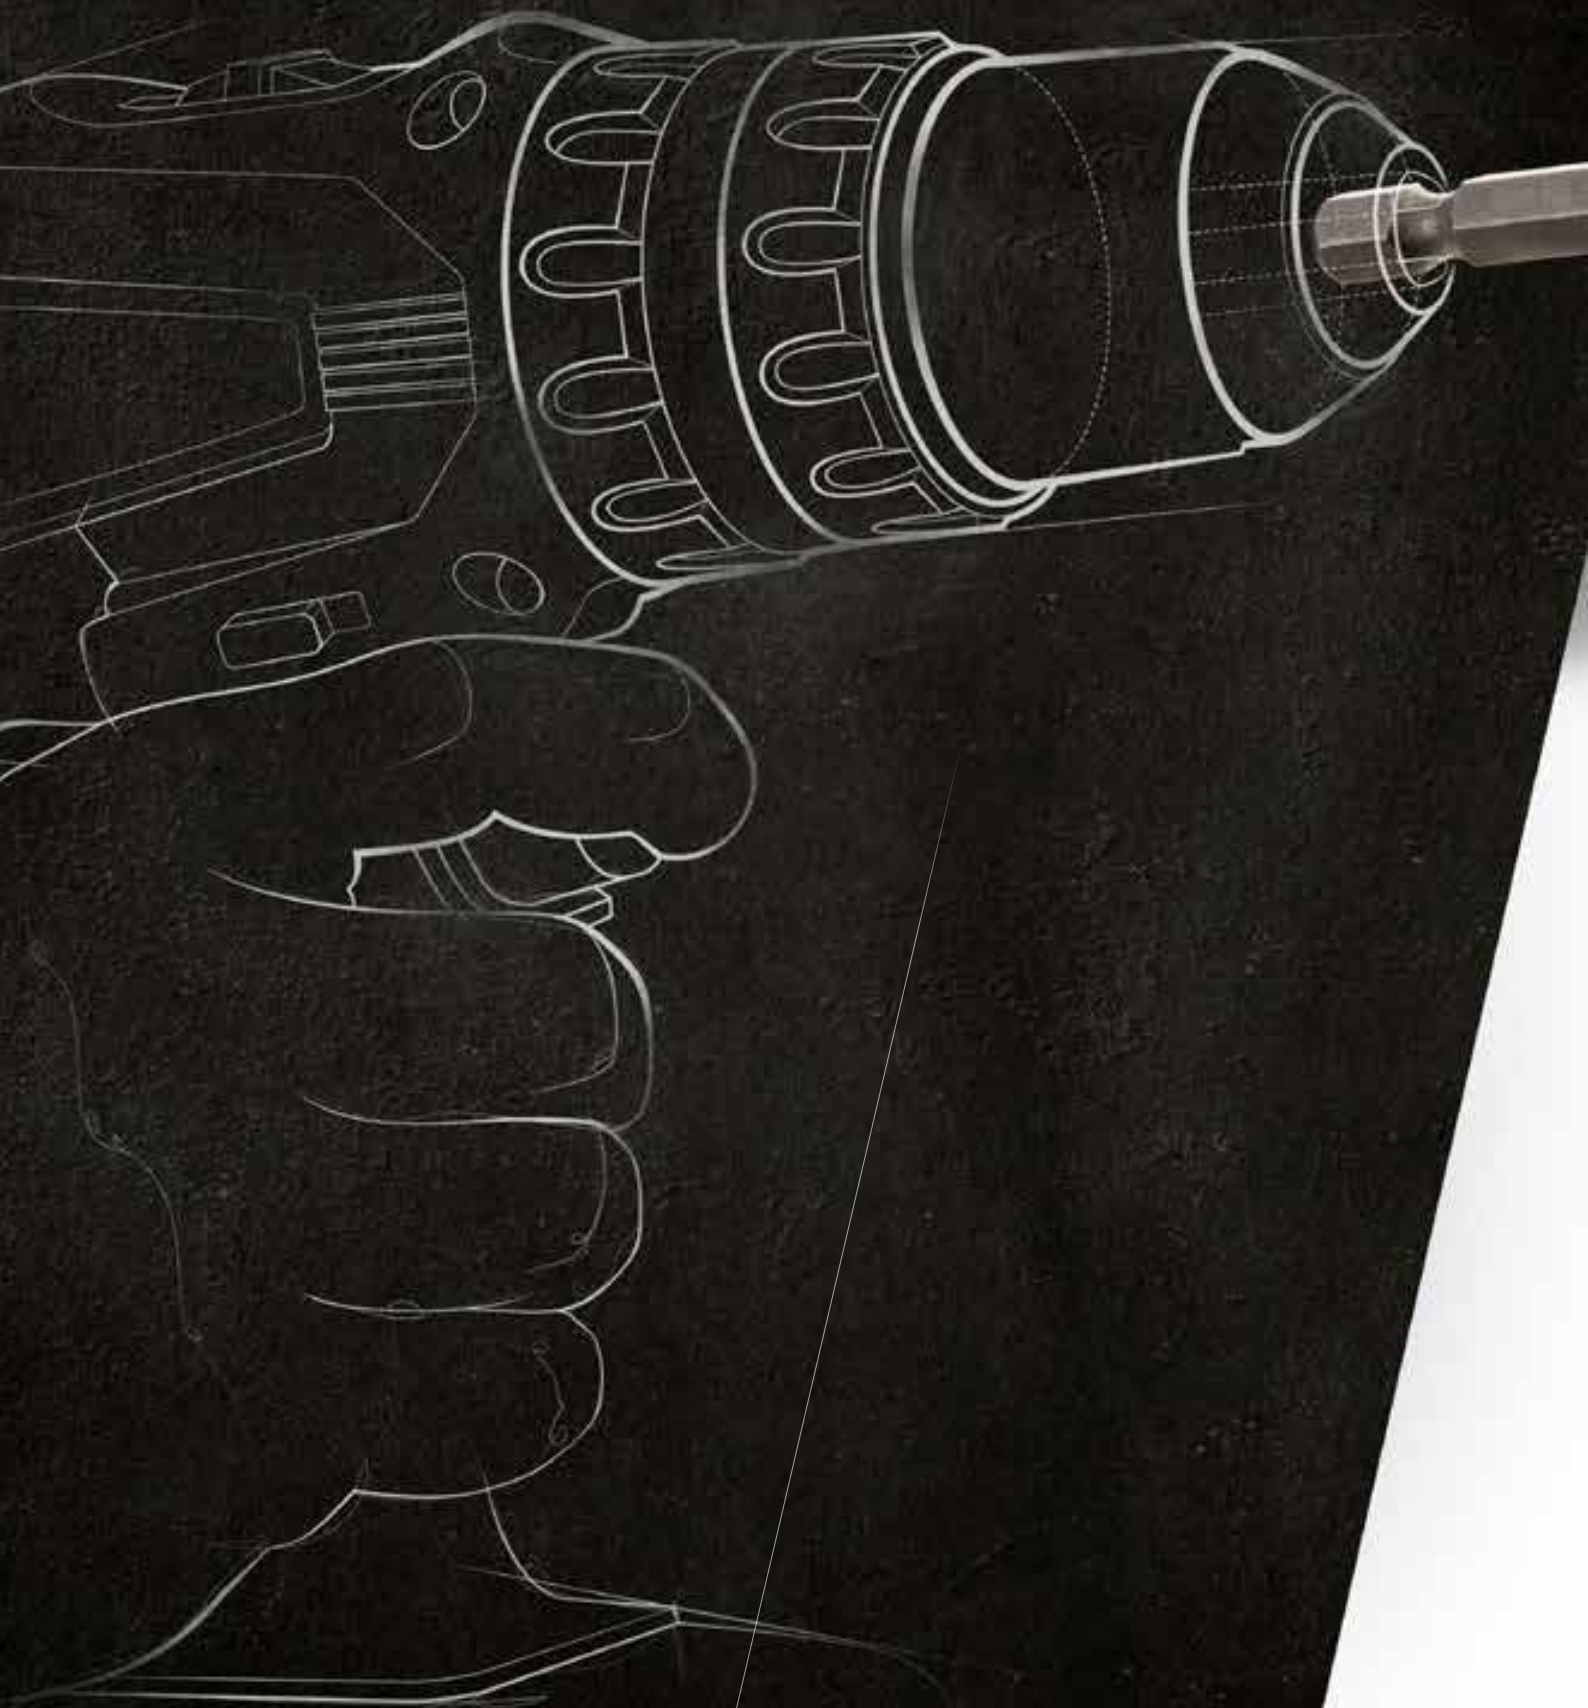


687

ESSENTIAL, QUALITY **SCREWDRIVER BITS** **FOR PROFESSIONALS**



**ULTIMATE GRIP WITH OUR DIAMOND-COATED
SCREWDRIVER BITS. IMPROVE PRODUCTIVITY
AND SAVE MONEY**



**NO MORE TORQUE PEAKS! THE TORSION ZONE
ABSORBS IT AND PREVENTS THE SCREWDRIVER
BIT (AND SCREW) FROM BREAKING**



**ACR® SCREWDRIVER BITS ARE SPECIALLY
MADE FOR TASKS WHERE YOU NEED TO
REDUCE THE CAM-OUT EFFECT**


FULL OF POWER

We offer you a wide range of screwdriver bits, with a choice of features to suit any application. Bits that make a difference! Bahco Screwdriver Bits are made of high-performance steel alloy and give you the top quality and long service life you're looking for as a professional.

You can choose from all kinds of profiles and drives, such as slotted, Phillips, Pozidriv, TORX®, TORX® Tamper, HEX, Robertson®, XZN, Tri-wing and TORQ-SET®.


Bahco meets professional demands by providing the appropriate quality levels: Standard, Torsion, Extra Hard Torsion, INOX Torsion, Stainless Steel, TiN Torsion, ACR Torsion and Diamond Torsion Screwdriver Bits.

FULL SUPPORT



TORQUE PEAKS

When using a machine, bits and screws can be submitted to very high torque peaks which cause wear on both bit and screw but can also lead to breakage.

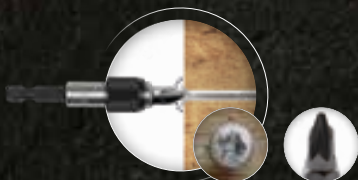


CAM-OUT-EFFECT

The Cam-Out effect is a common problem with conventional screwdriver bits. The cam-out force causes the bit to slip out of the screw head and possibly damages the screwhead or screwdriver bit.




INNOVATIVE TORSION ZONE

All Bahco special screwdriver bits have a Torsion zone (extended bar) that absorbs torque peaks, avoiding premature wear and prolonging service life. Nucleus Hardness: 62-64 HRC.



ANTI-CAM-OUT-EFFECT

Conventional screwdriver bits easily slip out of the head of the screw. Avoid this cam-out with ACR® bits. The Anti-Cam-out-Ribs lock themselves into the screw and provide strong grip.



















DIAMOND COATING

Our diamond screwdriver bits are tip coated with thousands of industrial-grade diamond particles. This significantly reduces the cam-out effect and provides ultimate and safe grip.

FULL RANGE

687 PRODUCTS

| | DIAMOND SCREWDRIVER BITS | TIN TORSION SCREWDRIVER BITS | ACR® TORSION SCREWDRIVER BITS | TORSION SCREWDRIVER BITS |
|--------------------|---|---|---|---|
| Range |  25-50 mm |  25-50 mm |  25 mm |  25 mm |
| Screw heads |  |  |  |  |
| Sets | ✓ | ✓ | | ✓ |
| Application | High performance in any application | High volume production and continuous use | For tasks requiring reduction of the "cam-out" effect | Hard material applications |
| | EXTRA HARD TORSION SCREWDRIVER BITS | STAINLESS STEEL TORSION SCREWDRIVER BITS | STANDARD SCREWDRIVER BITS | IMPACT SCREWDRIVER BITS |
| Range |  25-50 mm |  25-50 mm |  25-150 mm |  25 mm <i>COMING SOON!</i> |
| Screw heads |  |  |  |  |
| Sets | | ✓ | ✓ | ✓ |
| Application | Suitable for wood and soft material applications | Ideal for use on stainless steel screws | For all screw applications in trade and industry | For withstanding high power tool forces |

SCREWDRIVER BIT HOLDERS, POWER NUT DRIVERS AND ADAPTORS

TORSION SCREWDRIVER BIT HOLDER



QUICK-RELEASE SCREWDRIVER BIT HOLDER



UNIVERSAL SCREWDRIVER BIT HOLDER



SOCKET ADAPTORS



NUT DRIVERS



DIAMOND SCREWDRIVER BITS

33 PRODUCTS

ULTIMATE GRIP WITH
OUR DIAMOND-COATED
SCREWDRIVER BITS



TIP COATED WITH THOUSANDS OF INDUSTRIAL-GRADE DIAMOND PARTICLES

FITS MOST COMMON SCREW HEADS, SUCH AS PHILLIPS, POZIDRIV AND TORX®



HIGH PERFORMANCE FOR ANY JOB

CORE HARDNESS 60-62 HRC

SAFE GRIP AND SIGNIFICANTLY REDUCES THE CAM-OUT EFFECT

ABSORBS THE TORQUE PEAKS USING AN INNOVATIVE TORSION ZONE - LESS RISK OF THE SCREW OR BIT BREAKING

DIAMOND SCREWDRIVER BITS - 25 MM



FEATURES:

- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: Gold-coloured diamond coating
- Material: High-performance alloy steel
- Reduces wear on the bit and screw
- Diamond coating for a secure fit in the screw to minimise the cam-out effect reducing the 'down-time'
- Application: High performance in any application suitable for power tools
- Torsion zone that absorbs torque peaks avoiding premature wear and tear and improving service life

ASSORTMENT:

63D/PH | DIAMOND SCREWDRIVER BITS PHILLIPS - 25 MM

| Icon | Barcode | X | Y | Drive | Length | Weight |
|------------|---------------|---|---|-------|--------|--------|
| | | | | | | |
| 63D/PH1-2P | 7314150201051 | 2 | 1 | PH1 | 25 | 10 |
| 63D/PH2-2P | 7314150201068 | 2 | 1 | PH2 | 25 | 15 |
| 63D/PH3-2P | 7314150262342 | 2 | 1 | PH3 | 25 | 31 |








| Icon | Barcode | X | Y | Drive | Length | Weight |
|---------|---------------|---|---|-------|--------|--------|
| | | | | | | |
| 63D/PH1 | 7314150198917 | 5 | 1 | PH1 | 25 | 25 |
| 63D/PH2 | 7314150198931 | 5 | 1 | PH2 | 25 | 25 |
| 63D/PH3 | 7314150198948 | 5 | 1 | PH3 | 25 | 25 |

63D/PH2G | DIAMOND SCREWDRIVER BITS GRABBER PHILLIPS - 25 MM








| Icon | Barcode | X | Y | Drive | Length | Weight |
|-------------|---------------|---|---|-------|--------|--------|
| | | | | | | |
| 63D/PH2G-2P | 7314150201075 | 2 | 1 | PH2G | 25 | 15 |

| Icon | Barcode | X | Y | Drive | Length | Weight |
|----------|---------------|---|---|-------|--------|--------|
| | | | | | | |
| 63D/PH2G | 7314150198979 | 5 | 1 | PH2G | 25 | 25 |

63D/PZ | DIAMOND SCREWDRIVER BITS POZIDRIV - 25 MM

|  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| 63D/PZ1-2P | 7314150201037 | 2 | 1 | PZ1 | 25 | 10 |
| 63D/PZ2-2P | 7314150201044 | 2 | 1 | PZ2 | 25 | 15 |
| 63D/PZ3-2P | 7314150262335 | 2 | 1 | PZ3 | 25 | 31 |

63D/T | DIAMOND SCREWDRIVER BITS TORX® - 25 MM








|  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| 63D/T10-2P | 7314150262304 | 2 | 1 | T10 | 25 | 10 |
| 63D/T15-2P | 7314150201006 | 2 | 1 | T15 | 25 | 15 |
| 63D/T20-2P | 7314150201013 | 2 | 1 | T20 | 25 | 15 |
| 63D/T25-2P | 7314150201020 | 2 | 1 | T25 | 25 | 15 |
| 63D/T30-2P | 7314150262311 | 2 | 1 | T30 | 25 | 17 |
| 63D/T40-2P | 7314150262328 | 2 | 1 | T40 | 25 | 17 |

DIAMOND SCREWDRIVER BITS - 50 MM










ASSORTMENT:

63D/50PH | DIAMOND SCREWDRIVER BITS PHILLIPS - 50 MM

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
| 63D/50PH1 | 7314150200351 | 5 | 1 | PH1 | 50 | 40 |
| 63D/50PH2 | 7314150200368 | 5 | 1 | PH2 | 50 | 40 |

63D/50PZ | DIAMOND SCREWDRIVER BITS POZIDRIV - 50 MM

|  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| 63D/50PZ1 | 7314150200320 | 5 | 1 | PZ1 | 50 | 40 |
| 63D/50PZ2 | 7314150200337 | 5 | 1 | PZ2 | 50 | 40 |

63D/7

DIAMOND SCREWDRIVER BIT SET - 7 PCS



FEATURES:









- 7 pcs bit set: 6 diamond bits and 1 universal bit holder
- In a hanging cardboard sleeve
- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Diamond coating
- Material: High-performance alloy steel

- Tip coated with thousands of tiny industrial-grade diamond particles. Diamond bit has high strength and good wear resistance. Reduces significantly the "cam-out" effect and the necessary torque required to successfully drive the screw

ASSORTMENT:

|  |  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|---|
| 63D/7-1 | 7314150191604 | 7 | 1 | 80 | 50 | 20 | 155 |

SET CONTAINS:

| | | |
|------------------------------------|---|---|
| 63D/PH2 |  |  |
| 63D/PZ2 |  |  |
| 63D/T10, 63D/T15, 63D/T25, 63D/T30 |  |  |
| 1/4"- 50 mm |  |  |

TIN TORSION SCREWDRIVER BITS

37 PRODUCTS

ABRASION-PROOF COATING
TO GIVE HARDNESS
FOR MASS-PRODUCTION



COATED WITH EXTREMELY
HARD TITANIUM NITRIDE (TIN)

FITS MOST COMMON SCREW
HEADS, SUCH AS PHILLIPS,
POZIDRIV AND TORX®



MADE FOR MASS PRODUCTION AND
OTHER HIGH-DEMAND APPLICATIONS

CORE HARDNESS 60-62 HRC



INNOVATIVE TORSION ZONE - LESS
RISK OF BREAKAGES

TIN TORSION SCREWDRIVER BITS - 25 MM



FEATURES:

- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Titanium nitride
- Material: High-performance alloy steel

- Application: TIN bits are extremely wear resistant when used for high-volume production and continuous use
- Torsion zone absorbs torque peaks avoiding premature wear and tear and improving service life

ASSORTMENT:

62TIN/PH | TIN TORSION SCREWDRIVER BITS PHILLIPS - 25 MM

| Icon | Barcode | Quantity | Length | Head Type | Length | Weight |
|--------------|---------------|----------|--------|-----------|--------|--------|
| | | | | | | |
| 62TIN/PH1-2P | 7314150262083 | 2 | 1 | PH1 | 25 | 13 |
| 62TIN/PH2-2P | 7314150262090 | 2 | 1 | PH2 | 25 | 14 |
| 62TIN/PH3-2P | 7314150262106 | 2 | 1 | PH3 | 25 | 15 |

| Icon | Barcode | Quantity | Length | Head Type | Length | Weight |
|-----------|---------------|----------|--------|-----------|--------|--------|
| | | | | | | |
| 62TIN/PH1 | 7314150199259 | 10 | 1 | PH1 | 25 | 40 |
| 62TIN/PH2 | 7314150199297 | 10 | 1 | PH2 | 25 | 40 |
| 62TIN/PH3 | 7314150199303 | 10 | 1 | PH3 | 25 | 40 |

62TIN/PZ | TIN TORSION SCREWDRIVER BITS POZIDRIV - 25 MM

| Icon | Barcode | Quantity | Length | Head Type | Length | Weight |
|--------------|---------------|----------|--------|-----------|--------|--------|
| | | | | | | |
| 62TIN/PZ1-2P | 7314150201105 | 2 | 1 | PZ1 | 25 | 10 |
| 62TIN/PZ2-2P | 7314150201112 | 2 | 1 | PZ2 | 25 | 15 |
| 62TIN/PZ3-2P | 7314150201129 | 2 | 1 | PZ3 | 25 | 15 |

| Icon | Barcode | Quantity | Length | Head Type | Length | Weight |
|-----------|---------------|----------|--------|-----------|--------|--------|
| | | | | | | |
| 62TIN/PZ1 | 7314150199327 | 10 | 1 | PZ1 | 25 | 40 |
| 62TIN/PZ2 | 7314150199334 | 10 | 1 | PZ2 | 25 | 40 |
| 62TIN/PZ3 | 7314150199358 | 10 | 1 | PZ3 | 25 | 40 |

★ 62TIN/T | TIN TORSION SCREWDRIVER BITS TORX® - 25 MM

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|--------------|---------------|--------|------|------|------|------|------|
| 62TIN/T10-2P | 7314150262113 | 2 | 1 | T10 | 25 | 13 | |
| 62TIN/T15-2P | 7314150262144 | 2 | 1 | T15 | 25 | 13 | |
| 62TIN/T20-2P | 7314150262168 | 2 | 1 | T20 | 25 | 14 | |
| 62TIN/T25-2P | 7314150262212 | 2 | 1 | T25 | 25 | 14 | |
| 62TIN/T30-2P | 7314150262229 | 2 | 1 | T30 | 25 | 15 | |
| 62TIN/T40-2P | 7314150262236 | 2 | 1 | T40 | 25 | 20 | |

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|-----------|---------------|--------|------|------|------|------|------|
| 62TIN/T10 | 7314150199372 | 10 | 1 | T10 | 25 | 40 | |
| 62TIN/T15 | 7314150199402 | 10 | 1 | T15 | 25 | 40 | |
| 62TIN/T20 | 7314150199426 | 10 | 1 | T20 | 25 | 40 | |
| 62TIN/T25 | 7314150199440 | 10 | 1 | T25 | 25 | 40 | |
| 62TIN/T30 | 7314150199464 | 10 | 1 | T30 | 25 | 40 | |
| 62TIN/T40 | 7314150199471 | 10 | 1 | T40 | 25 | 50 | |

TIN TORSION SCREWDRIVER BITS - 50 MM



ASSORTMENT:

★ 62TIN/50PH | TIN TORSION SCREWDRIVER BITS PHILLIPS - 50 MM

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|----------------|---------------|--------|------|------|------|------|------|
| 62TIN/50PH1-2P | 7314150262243 | 2 | 1 | PH1 | 50 | 26 | |
| 62TIN/50PH2-2P | 7314150262250 | 2 | 1 | PH2 | 50 | 28 | |
| 62TIN/50PH3-2P | 7314150262267 | 2 | 1 | PH3 | 50 | 30 | |

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|-------------|---------------|--------|------|------|------|------|------|
| 62TIN/50PH1 | 7314150200504 | 5 | 1 | PH1 | 50 | 50 | |
| 62TIN/50PH2 | 7314150200511 | 5 | 1 | PH2 | 50 | 50 | |
| 62TIN/50PH3 | 7314150200528 | 5 | 1 | PH3 | 50 | 50 | |

★ 62TIN/50PZ | TIN TORSION SCREWDRIVER BITS POZIDRIV - 50 MM

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|----------------|---------------|--------|------|------|------|------|------|
| 62TIN/50PZ1-2P | 7314150262274 | 2 | 1 | PZ1 | 50 | 26 | |
| 62TIN/50PZ2-2P | 7314150262281 | 2 | 1 | PZ2 | 50 | 28 | |
| 62TIN/50PZ3-2P | 7314150262281 | 2 | 1 | PZ3 | 50 | 28 | |

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|-------------|---------------|--------|------|------|------|------|------|
| 62TIN/50PZ1 | 7314150200535 | 5 | 1 | PZ1 | 50 | 50 | |
| 62TIN/50PZ2 | 7314150200542 | 5 | 1 | PZ2 | 50 | 50 | |
| 62TIN/50PZ3 | 7314150200559 | 5 | 1 | PZ3 | 50 | 50 | |

62TIN/7

TIN TORSION SCREWDRIVER BIT SET - 7 PCS



FEATURES:

- 7 pcs bit set: 6 tin bits and 1 universal bit holder
- In a hanging cardboard sleeve
- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Titanium nitride

- Material: High-performance alloy steel
- TIN bits are extremely wear resistant when used for high-volume production and continuous use at normal torque levels

ASSORTMENT:

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|-----------|---------------|--------|------|------|------|------|------|
| 62TIN/7-1 | 7314150203505 | 7 | 1 | 75 | 65 | 22 | 105 |

SET CONTAINS:

| | |
|--|--|
| 62TIN/PH2 | |
| 62TIN/PZ2 | |
| 62TIN/T15, 62TIN/T20, 62TIN/T25, 62TIN/T30 | |
| 1/4" - 50 mm | |

ACR TORSION SCREWDRIVER BITS

12 PRODUCTS

**ACR®: TOUGHNESS AND
LESS CAM-OUT EFFECT**



• SCREW HEAD WITH "ANTI-CAM-OUT-RIBS" – THE ACR® SYSTEM

• FITS MOST COMMON
SCREW HEADS, SUCH AS
PHILLIPS AND POZIDRIV



• SPECIALLY MADE FOR JOBS
WHERE YOU WANT TO REDUCE
THE CAM-OUT EFFECT

• CORE HARDNESS 60-62 HRC

• SURFACE COATED WITH CLEAR
LACQUER FOR RUST PROTECTION

• INNOVATIVE TORSION ZONE
ABSORBS THE TORQUE PEAKS
– LESS RISK OF BREAKAGES

ACR TORSION SCREWDRIVER BITS - 25 MM



FEATURES:

- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Surface coated with clear lacquer for rust protection

- Material: High-performance alloy steel, ideal for bits
- Application: Recommended for tasks requiring reduction of the "cam-out" effect, avoiding the erosion of the bit-screws

ASSORTMENT:

64A/PH | ACR TORSION SCREWDRIVER BITS PHILLIPS - 25 MM

| Icon | Barcode | Box | Box | Drive | Length | Weight |
|------------|---------------|-----|-----|-------|--------|--------|
| | | | | | | |
| 64A/PH1-2P | 7314150200948 | 2 | 1 | PH1 | 25 | 10 |
| 64A/PH2-2P | 7314150200955 | 2 | 1 | PH2 | 25 | 15 |
| 64A/PH3-2P | 7314150200962 | 2 | 1 | PH3 | 25 | 15 |

| Icon | Barcode | Box | Box | Drive | Length | Weight |
|---------|---------------|-----|-----|-------|--------|--------|
| | | | | | | |
| 64A/PH1 | 7314150198481 | 10 | 1 | PH1 | 25 | 50 |
| 64A/PH2 | 7314150198559 | 10 | 1 | PH2 | 25 | 50 |
| 64A/PH3 | 7314150198573 | 10 | 1 | PH3 | 25 | 50 |

64A/PZ | ACR TORSION SCREWDRIVER BITS POZIDRIV - 25 MM

| Icon | Barcode | Box | Box | Drive | Length | Weight |
|------------|---------------|-----|-----|-------|--------|--------|
| | | | | | | |
| 64A/PZ1-2P | 7314150200979 | 2 | 1 | PZ1 | 25 | 10 |
| 64A/PZ2-2P | 7314150200986 | 2 | 1 | PZ2 | 25 | 15 |
| 64A/PZ3-2P | 7314150200993 | 2 | 1 | PZ3 | 25 | 15 |

| Icon | Barcode | Box | Box | Drive | Length | Weight |
|---------|---------------|-----|-----|-------|--------|--------|
| | | | | | | |
| 64A/PZ1 | 7314150198603 | 10 | 1 | PZ1 | 25 | 50 |
| 64A/PZ2 | 7314150198627 | 10 | 1 | PZ2 | 25 | 50 |
| 64A/PZ3 | 7314150198634 | 10 | 1 | PZ3 | 25 | 50 |

TORSION SCREWDRIVER BITS

31 PRODUCTS

SCREWDRIVER BITS WITH
INNOVATIVE TORSION ZONE
FOR HARD MATERIALS



SUITABLE FOR HARD MATERIAL
APPLICATIONS IN MANY
DIFFERENT ENVIRONMENTS

FITS MOST COMMON SCREW
HEADS, SUCH AS PHILLIPS,
POZIDRIV AND TORX®



CORE HARDNESS 60-62 HRC

STEEL SURFACE-COATED
WITH CLEAR LACQUER FOR
RUST PROTECTION

ABSORBS THE TORQUE PEAKS
USING AN INNOVATIVE TORSION
ZONE – LESS RISK OF THE SCREW
OR SCREWDRIVER BIT BREAKING

TORSION SCREWDRIVER BITS - 25 MM



FEATURES:

- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Steel surface coated with clear lacquer for rust protection
- Material: High-performance alloy steel
- Application: Torsion bits are suitable for hard material applications

- A softer bit is more wear resistant against sudden impacts (in hard materials), preventing the tip from breaking prematurely
- Surface-coated with clear lacquer for rust protection
- Torsion zone that absorbs torque peaks avoiding premature wear and tear and improving service life

ASSORTMENT:

60T/PH | TORSION SCREWDRIVER BITS PHILLIPS - 25 MM

| Icon | Barcode | Box | Bag | Head | Length | Weight |
|------------|---------------|-----|-----|------|--------|--------|
| | | | | | | |
| 60T/PH1-2P | 7314150201136 | 2 | 1 | PH1 | 25 | 10 |
| 60T/PH2-2P | 7314150201143 | 2 | 1 | PH2 | 25 | 15 |
| 60T/PH3-2P | 7314150201150 | 2 | 1 | PH3 | 25 | 15 |

| Icon | Barcode | Box | Bag | Head | Length | Weight |
|---------|---------------|-----|-----|------|--------|--------|
| | | | | | | |
| 60T/PH1 | 7314150199488 | 10 | 1 | PH1 | 25 | 40 |
| 60T/PH2 | 7314150199495 | 10 | 1 | PH2 | 25 | 40 |
| 60T/PH3 | 7314150199501 | 10 | 1 | PH3 | 25 | 60 |

60T/PZ | TORSION SCREWDRIVER BITS POZIDRIV - 25 MM

| Icon | Barcode | Box | Bag | Head | Length | Weight |
|------------|---------------|-----|-----|------|--------|--------|
| | | | | | | |
| 60T/PZ1-2P | 7314150201167 | 2 | 1 | PZ1 | 25 | 10 |
| 60T/PZ2-2P | 7314150201174 | 2 | 1 | PZ2 | 25 | 15 |
| 60T/PZ3-2P | 7314150201181 | 2 | 1 | PZ3 | 25 | 15 |

| Icon | Barcode | Box | Bag | Head | Length | Weight |
|---------|---------------|-----|-----|------|--------|--------|
| | | | | | | |
| 60T/PZ1 | 7314150199525 | 10 | 1 | PZ1 | 25 | 45 |
| 60T/PZ2 | 7314150199549 | 10 | 1 | PZ2 | 25 | 50 |
| 60T/PZ3 | 7314150199563 | 10 | 1 | PZ3 | 25 | 50 |

★ 60T/T | TORSION SCREWDRIVER BITS TORX® - 25 MM

| 60T/T10-2P | 7314150201198 | 2 | 1 | T10 | 25 | 10 |
|------------|---------------|----|---|-----|----|----|
| 60T/T15-2P | 7314150201204 | 2 | 1 | T15 | 25 | 10 |
| 60T/T20-2P | 7314150201211 | 2 | 1 | T20 | 25 | 15 |
| 60T/T25-2P | 7314150201228 | 2 | 1 | T25 | 25 | 15 |
| 60T/T30-2P | 7314150201235 | 2 | 1 | T30 | 25 | 15 |
| 60T/T40-2P | 7314150201242 | 2 | 1 | T40 | 25 | 15 |
| 60T/T7 | 7314150199587 | 10 | 1 | T7 | 25 | 40 |
| 60T/T8 | 7314150199600 | 10 | 1 | T8 | 25 | 40 |

| 60T/T9 | 7314150199624 | 10 | 1 | T9 | 25 | 40 |
|---------|---------------|----|---|-----|----|----|
| 60T/T10 | 7314150199648 | 10 | 1 | T10 | 25 | 40 |
| 60T/T15 | 7314150199662 | 10 | 1 | T15 | 25 | 40 |
| 60T/T20 | 7314150199686 | 10 | 1 | T20 | 25 | 40 |
| 60T/T25 | 7314150199709 | 10 | 1 | T25 | 25 | 40 |
| 60T/T27 | 7314150199723 | 10 | 1 | T27 | 25 | 40 |
| 60T/T30 | 7314150199747 | 10 | 1 | T30 | 25 | 40 |
| 60T/T40 | 7314150199761 | 10 | 1 | T40 | 25 | 40 |

60T/7 TORSION SCREWDRIVER BIT SET - 7 PCS



FEATURES:

- 7 pcs bit set: 6 torsion bits and 1 universal bit holder
- In a hanging cardboard card
- Drive: 1/4" DIN 3126-C6.3, ISO 1173

- Finish: Zinc phosphate
- Material: High-performance alloy steel, ideal for bits
- Torsion bits are suitable for hard material applications

ASSORTMENT:

| 60T/7-1 | 7314150191574 | 7 | 1 | 75 | 65 | 22 | 105 | |
|---------|---------------|---|---|----|----|----|-----|--|

SET CONTAINS:

| | | |
|------------------------------------|--|--|
| 60T/PH2 | | |
| 60T/PZ2 | | |
| 60T/T10, 60T/T15, 60T/T20, 60T/T30 | | |
| 1/4"- 50 mm | | |

60T/17 TORSION SCREWDRIVER BIT SET - 17 PCS



FEATURES:

- 17 pcs bit set: 16 bits and 1 magnetic quick-release bit holder
- Drive: 1/4" DIN 3126-C6.3, ISO 1173

- Finish: Zinc phosphate
- Material: High-performance alloy steel
- Torsion bits are suitable for hard material applications

ASSORTMENT:

| 60T/17-1 | 7314150191529 | 17 | 1 | 82 | 73 | 27 | 130 | |
|----------|---------------|----|---|----|----|----|-----|--|

SET CONTAINS:

| | | |
|---|--|--|
| 60T/PH1, PH2 | | |
| 60T/T7, T8, T9, T10, 2xT15, 2xT20, 2xT25, T27, 2xT30, T40 | | |
| 1/4"- 50 mm | | |

60T/31

TORSION SCREWDRIVER BIT SET - 31 PCS



FEATURES:

- 31 pcs bit set: 30 (Torsion+Original) bits and 1 magnetic quick-release bit holder
- In hanging cardboard packaging
- Drive: 1/4" DIN 3126-C6.3, ISO 1173

- Finish: Zinc phosphate
- Material: High-performance alloy steel
- Torsion bits are suitable for hard material applications

ASSORTMENT:

| | | | | | | | | |
|----------|---------------|----|---|-----|----|----|-----|--|
| | | | | | | | | |
| 60T/31-1 | 7314150191482 | 31 | 1 | 110 | 65 | 42 | 245 | |

SET CONTAINS:

| | | |
|--|--|--|
| 60T/0.6x4.5, 0.8x5.5 mm | | |
| 60T/PH1, 3xPH2, PH3, 2xPH2G | | |
| 60T/PZ1, 3xPZ2, PZ3 | | |
| 60T/T10, 3xT15, 3xT20, 2xT25, T27, 2xT30 | | |
| 60T/H3.0, 4.0, 5.0, 6.0 | | |
| 1/4"- 60 mm | | |

EXTRA HARD TORSION SCREWDRIVER BITS

48 PRODUCTS

EXTRA HARD TORSION
SCREWDRIVER BITS FOR
SOFT MATERIALS



SUITABLE FOR WOOD
AND SOFT MATERIALS

FITS MOST COMMON SCREW
HEADS, SUCH AS PHILLIPS,
POZIDRIV AND TORX®



STEEL SURFACE-COATED
FOR RUST PROTECTION



INNOVATIVE TORSION ZONE
- LESS RISK OF BREAKAGES

EXTRA HARD TORSION SCREWDRIVER BITS - 25 MM



FEATURES:

- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Surface coated for rust protection
- Material: High-performance alloy steel, ideal for bits
- Application: Extra hard bits are suitable for wood and soft material applications

- Suitable for wood and soft material applications
- Extra hard bits are subject to special heating processes that make them harder and reduce the risk of the breakage
- Surface-coated with clear lacquer for rust protection
- Torsion zone that absorbs torque peaks avoiding premature wear and tear and improving service life

ASSORTMENT:

61H/PH | EXTRA HARD TORSION SCREWDRIVER BITS PHILLIPS - 25 MM

| Part No. | Barcode | Box Qty | Pack Qty | Drive | Length (mm) | Weight (g) |
|------------|---------------|---------|----------|-------|-------------|------------|
| 61H/PH1-2P | 7314150261840 | 2 | 1 | PH1 | 25 | 13 |
| 61H/PH2-2P | 7314150201082 | 2 | 1 | PH2 | 25 | 15 |
| 61H/PH3-2P | 7314150261857 | 2 | 1 | PH3 | 25 | 15 |

| Part No. | Barcode | Box Qty | Pack Qty | Drive | Length (mm) | Weight (g) |
|----------|---------------|---------|----------|-------|-------------|------------|
| 61H/PH1 | 7314150199006 | 10 | 1 | PH1 | 25 | 40 |
| 61H/PH2 | 7314150199020 | 10 | 1 | PH2 | 25 | 40 |
| 61H/PH3 | 7314150199044 | 5 | 1 | PH3 | 25 | 25 |

61H/PZ | EXTRA HARD TORSION SCREWDRIVER BITS POZIDRIV - 25 MM

| Part No. | Barcode | Box Qty | Pack Qty | Drive | Length (mm) | Weight (g) |
|------------|---------------|---------|----------|-------|-------------|------------|
| 61H/PZ1-2P | 7314150261888 | 2 | 1 | PZ1 | 25 | 13 |
| 61H/PZ2-2P | 7314150201099 | 2 | 1 | PZ2 | 25 | 15 |
| 61H/PZ3-2P | 7314150261895 | 2 | 1 | PZ3 | 25 | 15 |

| Part No. | Barcode | Box Qty | Pack Qty | Drive | Length (mm) | Weight (g) |
|----------|---------------|---------|----------|-------|-------------|------------|
| 61H/PZ1 | 7314150199068 | 10 | 1 | PZ1 | 25 | 40 |
| 61H/PZ2 | 7314150199082 | 10 | 1 | PZ2 | 25 | 40 |
| 61H/PZ3 | 7314150199105 | 5 | 1 | PZ3 | 25 | 25 |

★ 61H/T | EXTRA HARD TORSION SCREWDRIVER BITS TORX® - 25 MM

| 61H/T10-2P | | 7314150261901 | 2 | 1 | T10 | 25 | 13 |
|------------|--|---------------|---|---|-----|----|----|
| 61H/T15-2P | | 7314150261918 | 2 | 1 | T15 | 25 | 13 |
| 61H/T20-2P | | 7314150261925 | 2 | 1 | T20 | 25 | 14 |
| 61H/T25-2P | | 7314150261932 | 2 | 1 | T25 | 25 | 14 |
| 61H/T30-2P | | 7314150261949 | 2 | 1 | T30 | 25 | 15 |
| 61H/T40-2P | | 7314150261956 | 2 | 1 | T40 | 25 | 17 |

| 61H/T10 | | 7314150199129 | 10 | 1 | T10 | 25 | 40 |
|---------|--|---------------|----|---|-----|----|----|
| 61H/T15 | | 7314150199143 | 10 | 1 | T15 | 25 | 40 |
| 61H/T20 | | 7314150199167 | 10 | 1 | T20 | 25 | 40 |
| 61H/T25 | | 7314150199181 | 10 | 1 | T25 | 25 | 40 |
| 61H/T30 | | 7314150199211 | 10 | 1 | T30 | 25 | 40 |
| 61H/T40 | | 7314150199235 | 5 | 1 | T40 | 25 | 30 |

EXTRA HARD TORSION SCREWDRIVER BITS - 50 MM



ASSORTMENT:

★ 61H/50PH | EXTRA HARD TORSION SCREWDRIVER BITS PHILLIPS - 50 MM

| 61H/50PH1-2P | | 7314150261963 | 2 | 1 | PH1 | 50 | 25 |
|--------------|--|---------------|---|---|-----|----|----|
| 61H/50PH2-2P | | 7314150261970 | 2 | 1 | PH2 | 50 | 26 |
| 61H/50PH3-2P | | 7314150261987 | 2 | 1 | PH3 | 50 | 30 |

| 61H/50PH1 | | 7314150200382 | 5 | 1 | PH1 | 50 | 40 |
|-----------|--|---------------|---|---|-----|----|----|
| 61H/50PH2 | | 7314150200399 | 5 | 1 | PH2 | 50 | 40 |
| 61H/50PH3 | | 7314150200405 | 5 | 1 | PH3 | 50 | 40 |

★ 61H/50PZ | EXTRA HARD TORSION SCREWDRIVER BITS POZIDRIV - 50 MM

| 61H/50PZ1-2P | | 7314150261994 | 2 | 1 | PZ1 | 50 | 25 |
|--------------|--|---------------|---|---|-----|----|----|
| 61H/50PZ2-2P | | 7314150262007 | 2 | 1 | PZ2 | 50 | 26 |
| 61H/50PZ3-2P | | 7314150262014 | 2 | 1 | PZ3 | 50 | 30 |

| 61H/50PZ1 | | 7314150200412 | 5 | 1 | PZ1 | 50 | 40 |
|-----------|--|---------------|---|---|-----|----|----|
| 61H/50PZ2 | | 7314150200429 | 5 | 1 | PZ2 | 50 | 40 |
| 61H/50PZ3 | | 7314150200436 | 5 | 1 | PZ3 | 50 | 40 |

★ 61H/50T | EXTRA HARD TORSION SCREWDRIVER BITS TORX® - 50 MM

| 61H/50T10-2P | | 7314150262021 | 2 | 1 | T10 | 50 | 25 |
|--------------|--|---------------|---|---|-----|----|----|
| 61H/50T15-2P | | 7314150262038 | 2 | 1 | T15 | 50 | 25 |
| 61H/50T20-2P | | 7314150262045 | 2 | 1 | T20 | 50 | 28 |
| 61H/50T25-2P | | 7314150262052 | 2 | 1 | T25 | 50 | 28 |
| 61H/50T30-2P | | 7314150262069 | 2 | 1 | T30 | 50 | 30 |
| 61H/50T40-2P | | 7314150262076 | 2 | 1 | T40 | 50 | 40 |

| 61H/50T10 | | 7314150200443 | 5 | 1 | T10 | 50 | 40 |
|-----------|--|---------------|---|---|-----|----|----|
| 61H/50T15 | | 7314150200450 | 5 | 1 | T15 | 50 | 40 |
| 61H/50T20 | | 7314150200467 | 5 | 1 | T20 | 50 | 40 |
| 61H/50T25 | | 7314150200474 | 5 | 1 | T25 | 50 | 40 |
| 61H/50T30 | | 7314150200481 | 5 | 1 | T30 | 50 | 40 |
| 61H/50T40 | | 7314150200498 | 5 | 1 | T40 | 50 | 40 |

STAINLESS STEEL **TORSION** SCREWDRIVER BITS

25 PRODUCTS

**INOX SCREWDRIVER BITS
FOR RUST-FREE
STAINLESS STEEL**



IDEAL FOR USE ON STAINLESS
STEEL SCREWS

FITS MOST COMMON SCREW
HEADS, SUCH AS PHILLIPS,
POZIDRIV AND TORX®



INOX SCREWDRIVER BITS
PREVENT RUST FORMATION ON
STAINLESS STEEL SURFACES

CORE HARDNESS 60-62 HRC

STEEL GREY SURFACE-COATED
FOR RUST PROTECTION



INNOVATIVE TORSION ZONE
ABSORBS THE TORQUE PEAKS
- LESS RISK OF BREAKAGES

STAINLESS STEEL TORSION SCREWDRIVER BITS - 25 MM



FEATURES:

- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Surface-passivated
- Material: High performance stainless steel, ideal for bits

- Application: Ideal for use on stainless steel screws. Stainless steel bits prevent the formation of rust on the stainless steel surface
- Torsion zone that absorbs torque peaks avoiding premature wear and tear and improving service life

ASSORTMENT:

651/PH | STAINLESS STEEL TORSION SCREWDRIVER BITS PHILLIPS - 25 MM

| Icon | Barcode | Box | Box | Drive | Length | Weight |
|------------|---------------|-----|-----|-------|--------|--------|
| | | | | | | |
| 651/PH1-2P | 7314150207985 | 2 | 1 | PH1 | 25 | 10 |
| 651/PH2-2P | 7314150201259 | 2 | 1 | PH2 | 25 | 15 |
| 651/PH3-2P | 7314150201266 | 2 | 1 | PH3 | 25 | 15 |

| Icon | Barcode | Box | Box | Drive | Length | Weight |
|---------|---------------|-----|-----|-------|--------|--------|
| | | | | | | |
| 651/PH1 | 7314150199785 | 10 | 1 | PH1 | 25 | 40 |
| 651/PH2 | 7314150199884 | 10 | 1 | PH2 | 25 | 40 |
| 651/PH3 | 7314150199907 | 10 | 1 | PH3 | 25 | 40 |

651/PZ | STAINLESS STEEL TORSION SCREWDRIVER BITS POZIDRIV - 25 MM

| Icon | Barcode | Box | Box | Drive | Length | Weight |
|------------|---------------|-----|-----|-------|--------|--------|
| | | | | | | |
| 651/PZ1-2P | 7314150201273 | 2 | 1 | PZ1 | 25 | 10 |
| 651/PZ2-2P | 7314150201280 | 2 | 1 | PZ2 | 25 | 15 |
| 651/PZ3-2P | 7314150201297 | 2 | 1 | PZ3 | 25 | 15 |

| Icon | Barcode | Box | Box | Drive | Length | Weight |
|---------|---------------|-----|-----|-------|--------|--------|
| | | | | | | |
| 651/PZ1 | 7314150199921 | 10 | 1 | PZ1 | 25 | 40 |
| 651/PZ2 | 7314150199945 | 10 | 1 | PZ2 | 25 | 40 |
| 651/PZ3 | 7314150199969 | 10 | 1 | PZ3 | 25 | 40 |

651/T STAINLESS STEEL TORSION SCREWDRIVER BITS TORX® - 25 MM

| 651/T10-2P | 7314150201303 | 2 | 1 | T10 | 25 | 10 |
|------------|---------------|---|---|-----|----|----|
| 651/T15-2P | 7314150201310 | 2 | 1 | T15 | 25 | 10 |
| 651/T20-2P | 7314150201327 | 2 | 1 | T20 | 25 | 15 |
| 651/T25-2P | 7314150201334 | 2 | 1 | T25 | 25 | 15 |
| 651/T30-2P | 7314150201341 | 2 | 1 | T30 | 25 | 15 |
| 651/T40-2P | 7314150201358 | 2 | 1 | T40 | 25 | 15 |

| 651/T10 | 7314150199983 | 5 | 1 | T10 | 25 | 40 |
|---------|---------------|---|---|-----|----|----|
| 651/T15 | 7314150199990 | 5 | 1 | T15 | 25 | 40 |
| 651/T20 | 7314150200016 | 5 | 1 | T20 | 25 | 40 |
| 651/T25 | 7314150200030 | 5 | 1 | T25 | 25 | 40 |
| 651/T30 | 7314150200054 | 5 | 1 | T30 | 25 | 40 |
| 651/T40 | 7314150200078 | 5 | 1 | T40 | 25 | 40 |

651/7

STAINLESS STEEL TORSION SCREWDRIVER BIT SET - 7 PCS



FEATURES:

- 7 pcs bit set: 6 stainless steel bits and 1 universal bit holder
- In a hanging cardboard sleeve
- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Zinc phosphate

- Material: High-performance alloy steel
- Stainless steel bits prevent the formation of rust on stainless steel surfaces
- With a stainless universal bit holder

ASSORTMENT:

| 651/7-1 | 7314150204113 | 7 | 1 | 75 | 65 | 22 105 |
|---------|---------------|---|---|----|----|--------|

SET CONTAINS:

| | |
|------------------------------------|--|
| 651/PH2 | |
| 651/PZ2 | |
| 651/T15, 651/T20, 651/T25, 651/T30 | |
| 1/4"- 50 mm | |

STANDARD SCREWDRIVER BITS

451 PRODUCTS

FOR ALL APPLICATIONS
IN ENGINEERING, TRADES
AND INDUSTRY



HIGHLY RESISTANT TO WEAR
AND TEAR

SCREW HEADS: SLOTTED,
PHILLIPS, POZIDRIV, TORX®,
TORX® TAMPER, HEX,
ROBERTSON®, XZN, TRI-WING
AND TORQ-SET®



CORE HARDNESS 58-62 HRC

ROBUST SCREWDRIVER BITS FOR
MANUAL AND MACHINE APPLICATIONS

STANDARD SCREWDRIVER BITS - 25 MM



FEATURES:

- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: Zinc phosphated

- Material: High performance alloy steel
- Application: Robust and tough bits for universal use

ASSORTMENT:

59S/ STANDARD SCREWDRIVER BITS SLOTTED - 25 MM

| Drive | Barcode | ISO | Material | Length (mm) | Width (mm) | Weight (g) |
|----------------|---------------|-----|----------|-------------|------------|------------|
| 59S/0.5-3.0-3P | 7314150259205 | 3 | 1 | 0,5 | 3 | 25 18 |
| 59S/0.5-4.0-3P | 7314150259212 | 3 | 1 | 0,5 | 4 | 25 18 |
| 59S/0.6-3.5-3P | 7314150259229 | 3 | 1 | 0,6 | 3,5 | 25 19 |
| 59S/0.6-4.5-3P | 7314150201600 | 3 | 1 | 0,6 | 4,5 | 25 20 |
| 59S/0.8-5.5-3P | 7314150201624 | 3 | 1 | 0,8 | 5,5 | 25 20 |
| 59S/1.0-5.5-3P | 7314150258963 | 3 | 1 | 1 | 5,5 | 25 20 |
| 59S/1.2-6.5-3P | 7314150258970 | 3 | 1 | 1,2 | 6,5 | 25 21 |
| 59S/1.2-8.0-3P | 7314150258987 | 3 | 1 | 1,2 | 8 | 25 23 |
| 59S/1.6-9.0-3P | 7314150259243 | 3 | 1 | 1,6 | 9 | 25 24 |
| 59S/1.6-10-3P | 7314150259236 | 3 | 1 | 1,6 | 10 | 25 26 |

| Drive | Barcode | ISO | Material | Length (mm) | Width (mm) | Weight (g) |
|-------------|---------------|-----|----------|-------------|------------|------------|
| 59S/0.5-3.0 | 7314150199815 | 10 | 1 | 0,5 | 3 | 25 40 |
| 59S/0.5-4.0 | 7314150199822 | 10 | 1 | 0,5 | 4 | 25 40 |
| 59S/0.6-3.5 | 7314150199839 | 10 | 1 | 0,6 | 3,5 | 25 40 |
| 59S/0.6-4.5 | 7314150199801 | 10 | 1 | 0,6 | 4,5 | 25 40 |
| 59S/0.8-5.5 | 7314150199849 | 10 | 1 | 0,8 | 5,5 | 25 40 |
| 59S/1.0-5.5 | 7314150199863 | 10 | 1 | 1 | 5,5 | 25 40 |
| 59S/1.2-6.5 | 7314150199887 | 10 | 1 | 1,2 | 6,5 | 25 40 |
| 59S/1.2-8.0 | 7314150199900 | 10 | 1 | 1,2 | 8 | 25 40 |
| 59S/1.6-9.0 | 7314150199853 | 10 | 1 | 1,6 | 9 | 25 40 |
| 59S/1.6-10 | 7314150199846 | 10 | 1 | 1,6 | 10 | 25 40 |

59S/PH | STANDARD SCREWDRIVER BITS PHILLIPS - 25 MM

| 59S/PH0-3P | 7314150258819 | 3 | 1 | PH0 | 25 | 19 | |
|------------|---------------|----|---|-----|----|----|--|
| 59S/PH1-3P | 7314150201396 | 3 | 1 | PH1 | 25 | 20 | |
| 59S/PH2-3P | 7314150201402 | 3 | 1 | PH2 | 25 | 20 | |
| 59S/PH3-3P | 7314150201419 | 3 | 1 | PH3 | 25 | 20 | |
| 59S/PH4-3P | 7314150258826 | 3 | 1 | PH4 | 32 | 40 | |
| 59S/PH0 | 7314150198177 | 10 | 1 | PH0 | 25 | 40 | |
| 59S/PH1 | 7314150198313 | 10 | 1 | PH1 | 25 | 40 | |
| 59S/PH2 | 7314150198320 | 10 | 1 | PH2 | 25 | 45 | |
| 59S/PH3 | 7314150198351 | 10 | 1 | PH3 | 25 | 50 | |

| 59S/PH4 | 7314150198368 | 10 | 1 | PH4 | 32 | 50 | |
|-------------|---------------|-----|---|-----|----|------|--|
| 59S/PH1-30P | 7314150200801 | 30 | 1 | PH1 | 25 | 165 | |
| 59S/PH2-30P | 7314150200818 | 30 | 1 | PH2 | 25 | 180 | |
| 59S/PH3-30P | 7314150200825 | 30 | 1 | PH3 | 25 | 165 | |
| 59S/PH1-IP | 7314150206780 | 100 | 1 | PH1 | 25 | 468 | |
| 59S/PH2-IP | 7314150206797 | 100 | 1 | PH2 | 25 | 468 | |
| 59S/PH1-IPB | 7314150225743 | 500 | 1 | PH1 | 25 | 2565 | |
| 59S/PH2-IPB | 7314150204038 | 500 | 1 | PH2 | 25 | 2565 | |
| 59S/PH3-IPB | 7314150225750 | 500 | 1 | PH3 | 25 | 2565 | |

59S/PH2G | STANDARD SCREWDRIVER BITS GRABBER PHILLIPS - 25 MM

| 59S/PH2G-3P | 7314150259250 | 3 | 1 | PH2G | 25 | 20 | |
|-------------|---------------|----|---|------|----|----|--|
| 59S/PH2G | 7314150204182 | 10 | 1 | PH2G | 25 | 50 | |

| 59S/PH2G-30P | 7314150200832 | 30 | 1 | PH2G | 25 | 165 | |
|--------------|---------------|----|---|------|----|-----|--|

59S/PZ | STANDARD SCREWDRIVER BITS POZIDRIV - 25 MM

| 59S/PZ0-3P | 7314150258833 | 3 | 1 | PZ0 | 25 | 18 | |
|------------|---------------|----|---|-----|----|----|--|
| 59S/PZ1-3P | 7314150201426 | 3 | 1 | PZ1 | 25 | 20 | |
| 59S/PZ2-3P | 7314150201433 | 3 | 1 | PZ2 | 25 | 20 | |
| 59S/PZ3-3P | 7314150201440 | 3 | 1 | PZ3 | 25 | 20 | |
| 59S/PZ0 | 7314150198375 | 10 | 1 | PZ0 | 25 | 40 | |
| 59S/PZ1 | 7314150198382 | 10 | 1 | PZ1 | 25 | 40 | |
| 59S/PZ2 | 7314150198405 | 10 | 1 | PZ2 | 25 | 50 | |
| 59S/PZ3 | 7314150198429 | 10 | 1 | PZ3 | 25 | 50 | |
| 59S/PZ4 | 7314150198436 | 10 | 1 | PZ4 | 32 | 40 | |

| 59S/PZ1-30P | 7314150200849 | 30 | 1 | PZ1 | 25 | 165 | |
|-------------|---------------|-----|---|-----|----|------|--|
| 59S/PZ2-30P | 7314150200856 | 30 | 1 | PZ2 | 25 | 180 | |
| 59S/PZ3-30P | 7314150200863 | 30 | 1 | PZ3 | 25 | 165 | |
| 59S/PZ1-IP | 7314150206803 | 100 | 1 | PZ1 | 25 | 468 | |
| 59S/PZ2-IP | 7314150206810 | 100 | 1 | PZ2 | 25 | 468 | |
| 59S/PZ1-IPB | 7314150204373 | 500 | 1 | PZ1 | 25 | 2565 | |
| 59S/PZ2-IPB | 7314150204380 | 500 | 1 | PZ2 | 25 | 2565 | |
| 59S/PZ3-IPB | 7314150225736 | 500 | 1 | PZ3 | 25 | 2565 | |

59S/T | STANDARD SCREWDRIVER BITS TORX® - 25 MM

| 59S/T3-3P | 7314150258840 | 3 | 1 | T3 | 25 | 18 | |
|------------|---------------|---|---|-----|----|----|--|
| 59S/T4-3P | 7314150258857 | 3 | 1 | T4 | 25 | 18 | |
| 59S/T5-3P | 7314150258864 | 3 | 1 | T5 | 25 | 18 | |
| 59S/T6-3P | 7314150258871 | 3 | 1 | T6 | 25 | 18 | |
| 59S/T7-3P | 7314150258888 | 3 | 1 | T7 | 25 | 18 | |
| 59S/T8-3P | 7314150258895 | 3 | 1 | T8 | 25 | 18 | |
| 59S/T9-3P | 7314150258901 | 3 | 1 | T9 | 25 | 19 | |
| 59S/T10-3P | 7314150201457 | 3 | 1 | T10 | 25 | 20 | |
| 59S/T15-3P | 7314150201464 | 3 | 1 | T15 | 25 | 20 | |
| 59S/T20-3P | 7314150201471 | 3 | 1 | T20 | 25 | 20 | |
| 59S/T25-3P | 7314150201488 | 3 | 1 | T25 | 25 | 20 | |
| 59S/T27-3P | 7314150201495 | 3 | 1 | T27 | 25 | 20 | |
| 59S/T30-3P | 7314150201501 | 3 | 1 | T30 | 25 | 20 | |
| 59S/T40-3P | 7314150201518 | 3 | 1 | T40 | 25 | 20 | |
| 59S/T45-3P | 7314150258918 | 3 | 1 | T45 | 25 | 27 | |
| 59S/T50-3P | 7314150258925 | 3 | 1 | T50 | 25 | 27 | |
| 59S/T3 | 7314150198443 | 5 | 1 | T3 | 25 | 35 | |
| 59S/T4 | 7314150198450 | 5 | 1 | T4 | 25 | 35 | |
| 59S/T5 | 7314150198467 | 5 | 1 | T5 | 25 | 35 | |

| 59S/T6 | 7314150198474 | 10 | 1 | T6 | 25 | 40 | |
|-------------|---------------|----|---|-----|----|-----|--|
| 59S/T7 | 7314150198498 | 10 | 1 | T7 | 25 | 40 | |
| 59S/T8 | 7314150198504 | 10 | 1 | T8 | 25 | 40 | |
| 59S/T9 | 7314150198511 | 10 | 1 | T9 | 25 | 40 | |
| 59S/T10 | 7314150198528 | 10 | 1 | T10 | 25 | 40 | |
| 59S/T15 | 7314150198535 | 10 | 1 | T15 | 25 | 40 | |
| 59S/T20 | 7314150198542 | 10 | 1 | T20 | 25 | 40 | |
| 59S/T25 | 7314150198566 | 10 | 1 | T25 | 25 | 40 | |
| 59S/T27 | 7314150198580 | 10 | 1 | T27 | 25 | 40 | |
| 59S/T30 | 7314150198597 | 5 | 1 | T30 | 25 | 45 | |
| 59S/T40 | 7314150198610 | 5 | 1 | T40 | 25 | 45 | |
| 59S/T45 | 7314150198641 | 5 | 1 | T45 | 25 | 50 | |
| 59S/T50 | 7314150198658 | 5 | 1 | T50 | 25 | 50 | |
| 59S/T10-30P | 7314150200870 | 30 | 1 | T10 | 25 | 165 | |
| 59S/T15-30P | 7314150200887 | 30 | 1 | T15 | 25 | 165 | |
| 59S/T20-30P | 7314150200894 | 30 | 1 | T20 | 25 | 180 | |
| 59S/T25-30P | 7314150200900 | 30 | 1 | T25 | 25 | 165 | |
| 59S/T30-30P | 7314150200924 | 30 | 1 | T30 | 25 | 165 | |
| 59S/T40-30P | 7314150200931 | 30 | 1 | T40 | 25 | 165 | |

59S/TR | STANDARD SCREWDRIVER BITS TORX® TAMPER - 25 MM

| 59S/TR7-3P | 7314150258932 | 3 | 1 | TR7 | 25 | 18 |
|-------------|---------------|---|---|------|----|----|
| 59S/TR8-3P | 7314150258949 | 3 | 1 | TR8 | 25 | 18 |
| 59S/TR9-3P | 7314150258956 | 3 | 1 | TR9 | 25 | 19 |
| 59S/TR10-3P | 7314150201525 | 3 | 1 | TR10 | 25 | 20 |
| 59S/TR15-3P | 7314150201532 | 3 | 1 | TR15 | 25 | 20 |
| 59S/TR20-3P | 7314150201549 | 3 | 1 | TR20 | 25 | 20 |
| 59S/TR25-3P | 7314150201556 | 3 | 1 | TR25 | 25 | 20 |
| 59S/TR27-3P | 7314150201570 | 3 | 1 | TR27 | 25 | 20 |
| 59S/TR30-3P | 7314150201587 | 3 | 1 | TR30 | 25 | 20 |
| 59S/TR40-3P | 7314150201594 | 3 | 1 | TR40 | 25 | 20 |

| 59S/TR7 | 7314150198672 | 5 | 1 | TR7 | 25 | 20 |
|----------|---------------|---|---|------|----|----|
| 59S/TR8 | 7314150198689 | 5 | 1 | TR8 | 25 | 20 |
| 59S/TR9 | 7314150198696 | 5 | 1 | TR9 | 25 | 20 |
| 59S/TR10 | 7314150198702 | 5 | 1 | TR10 | 25 | 20 |
| 59S/TR15 | 7314150198719 | 5 | 1 | TR15 | 25 | 25 |
| 59S/TR20 | 7314150198726 | 5 | 1 | TR20 | 25 | 25 |
| 59S/TR25 | 7314150198740 | 5 | 1 | TR25 | 25 | 25 |
| 59S/TR27 | 7314150198757 | 5 | 1 | TR27 | 25 | 25 |
| 59S/TR30 | 7314150198771 | 5 | 1 | TR30 | 25 | 25 |
| 59S/TR40 | 7314150198795 | 5 | 1 | TR40 | 25 | 25 |

59S/H MM | STANDARD SCREWDRIVER BITS HEX METRIC - 25 MM

| 59S/H1.5-3P | 7314150258994 | 3 | 1 | 1,5 | 25 | 20 |
|-------------|---------------|---|---|-----|----|----|
| 59S/H2-3P | 7314150259007 | 3 | 1 | 2 | 25 | 20 |
| 59S/H2.5-3P | 7314150259014 | 3 | 1 | 2,5 | 25 | 20 |
| 59S/H3-3P | 7314150201662 | 3 | 1 | 3 | 25 | 20 |
| 59S/H4-3P | 7314150201679 | 3 | 1 | 4 | 25 | 20 |
| 59S/H5-3P | 7314150201686 | 3 | 1 | 5 | 25 | 20 |
| 59S/H6-3P | 7314150201693 | 3 | 1 | 6 | 25 | 20 |
| 59S/H8-3P | 7314150201709 | 3 | 1 | 8 | 25 | 30 |
| 59S/H10-3P | 7311518333638 | 3 | 1 | 10 | 25 | 35 |
| 59S/H1.5 | 7314150198924 | 5 | 1 | 1,5 | 25 | 19 |

| 59S/H2 | 7314150198955 | 5 | 1 | 2 | 25 | 19 |
|------------|---------------|-----|---|-----|----|------|
| 59S/H2.5 | 7314150198962 | 5 | 1 | 2,5 | 25 | 19 |
| 59S/H3 | 7314150198986 | 5 | 1 | 3 | 25 | 20 |
| 59S/H4 | 7314150198993 | 5 | 1 | 4 | 25 | 20 |
| 59S/H5 | 7314150199013 | 5 | 1 | 5 | 25 | 20 |
| 59S/H6 | 7314150199037 | 5 | 1 | 6 | 25 | 25 |
| 59S/H8 | 7314150199051 | 5 | 1 | 8 | 25 | 30 |
| 59S/H10 | 7314150199075 | 5 | 1 | 10 | 25 | 40 |
| 59S/H4-IPB | 7314150225767 | 500 | 1 | 4 | 25 | 2565 |

59S/H" | STANDARD SCREWDRIVER BITS HEX IMPERIAL - 25 MM

| 59S/H1/16-3P | 7314150259021 | 3 | 1 | 1/16 | 25 | 18 |
|--------------|---------------|---|---|------|----|----|
| 59S/H5/64-3P | 7314150259038 | 3 | 1 | 5/64 | 25 | 19 |
| 59S/H3/32-3P | 7314150259045 | 3 | 1 | 3/32 | 25 | 19 |
| 59S/H7/64-3P | 7314150259052 | 3 | 1 | 7/64 | 25 | 19 |
| 59S/H1/8-3P | 7314150259069 | 3 | 1 | 1/8 | 25 | 20 |
| 59S/H9/64-3P | 7314150259076 | 3 | 1 | 9/64 | 25 | 20 |
| 59S/H5/32-3P | 7314150259083 | 3 | 1 | 5/32 | 25 | 21 |
| 59S/H3/16-3P | 7314150259090 | 3 | 1 | 3/16 | 25 | 22 |
| 59S/H7/32-3P | 7314150259113 | 3 | 1 | 7/32 | 25 | 24 |
| 59S/H1/4-3P | 7314150259120 | 3 | 1 | 1/4 | 25 | 25 |
| 59S/H5/16-3P | 7314150259137 | 3 | 1 | 5/16 | 25 | 31 |
| 59S/H3/8-3P | 7314150259144 | 3 | 1 | 3/8 | 25 | 40 |

| 59S/H1/16 | 7314150204205 | 5 | 1 | 1/16 | 25 | 20 |
|-----------|---------------|---|---|------|----|----|
| 59S/H5/64 | 7314150199112 | 5 | 1 | 5/64 | 25 | 20 |
| 59S/H3/32 | 7314150199136 | 5 | 1 | 3/32 | 25 | 20 |
| 59S/H7/64 | 7314150199150 | 5 | 1 | 7/64 | 25 | 25 |
| 59S/H1/8 | 7314150199174 | 5 | 1 | 1/8 | 25 | 25 |
| 59S/H9/64 | 7314150199198 | 5 | 1 | 9/64 | 25 | 25 |
| 59S/H5/32 | 7314150199204 | 5 | 1 | 5/32 | 25 | 30 |
| 59S/H3/16 | 7314150199228 | 5 | 1 | 3/16 | 25 | 30 |
| 59S/H7/32 | 7314150199242 | 5 | 1 | 7/32 | 25 | 30 |
| 59S/H1/4 | 7314150199266 | 5 | 1 | 1/4 | 25 | 40 |
| 59S/H5/16 | 7314150199273 | 5 | 1 | 5/16 | 25 | 40 |
| 59S/H3/8 | 7314150204212 | 5 | 1 | 3/8 | 25 | 40 |

59S/R | STANDARD SCREWDRIVER BITS ROBERTSON® - 25 MM

| 59S/R1-3P | 7314150201631 | 3 | 1 | #1 | 25 | 20 |
|-----------|---------------|----|---|----|----|----|
| 59S/R2-3P | 7314150201648 | 3 | 1 | #2 | 25 | 20 |
| 59S/R3-3P | 7314150201655 | 3 | 1 | #3 | 25 | 20 |
| 59S/R1 | 7314150199310 | 10 | 1 | #1 | 25 | 40 |

| 59S/R2 | 7314150199341 | 10 | 1 | #2 | 25 | 40 |
|--------|---------------|----|---|----|----|----|
| 59S/R3 | 7314150199365 | 10 | 1 | #3 | 25 | 40 |
| 59S/R4 | 7314150232109 | 10 | 1 | #4 | 25 | 40 |

59S/TS | STANDARD SCREWDRIVER BITS TORQ-SET® METRIC - 25 MM

| 59S/TS-0 | 7314150199389 | 5 | 1 | 0 | 25 | 40 |
|----------|---------------|---|---|---|----|----|
| 59S/TS-1 | 7314150199396 | 5 | 1 | 1 | 25 | 40 |
| 59S/TS-2 | 7314150199419 | 5 | 1 | 2 | 25 | 40 |
| 59S/TS-3 | 7314150199433 | 5 | 1 | 3 | 25 | 40 |
| 59S/TS-4 | 7314150199457 | 5 | 1 | 4 | 25 | 40 |

| 59S/TS-5 | 7314150199518 | 5 | 1 | 5 | 25 | 40 |
|-----------|---------------|---|---|----|----|----|
| 59S/TS-6 | 7314150199532 | 5 | 1 | 6 | 25 | 40 |
| 59S/TS-8 | 7314150199556 | 5 | 1 | 8 | 25 | 40 |
| 59S/TS-10 | 7314150199570 | 5 | 1 | 10 | 25 | 40 |

+ 59S/TS[®] | STANDARD SCREWDRIVER BITS TORQ-SET[®] IMPERIAL - 25 MM

| 59S/TS-1/4 | 7314150199594 | 5 | 1 | 1/4 | 25 | 40 | |
|------------|---------------|---|---|-----|----|----|--|

▲ 59S/TW | STANDARD SCREWDRIVER BITS TRI-WING - 25 MM

| 59S/TW0 | 7314150199617 | 5 | 1 | TW 0 | 25 | 40 | |
|---------|---------------|---|---|------|----|----|--|
| 59S/TW1 | 7314150199631 | 5 | 1 | TW 1 | 25 | 40 | |
| 59S/TW2 | 7314150199655 | 5 | 1 | TW 2 | 25 | 40 | |

| 59S/TW3 | 7314150199679 | 5 | 1 | TW 3 | 25 | 40 | |
|---------|---------------|---|---|------|----|----|--|
| 59S/TW4 | 7314150199693 | 5 | 1 | TW 4 | 25 | 40 | |
| 59S/TW5 | 7314150199716 | 5 | 1 | TW 5 | 25 | 40 | |

● 59S/M | STANDARD SCREWDRIVER BITS XZN - 25 MM

| 59S/M3-3P | 7314150259151 | 3 | 1 | M3 | 25 | 19 | |
|-----------|---------------|---|---|----|----|----|--|
| 59S/M4-3P | 7314150259168 | 3 | 1 | M4 | 25 | 20 | |
| 59S/M5-3P | 7314150259175 | 3 | 1 | M5 | 25 | 20 | |
| 59S/M6-3P | 7314150259182 | 3 | 1 | M6 | 25 | 24 | |
| 59S/M8-3P | 7314150259199 | 3 | 1 | M8 | 25 | 27 | |

| 59S/M3 | 7314150199730 | 10 | 1 | M3 | 25 | 40 | |
|--------|---------------|----|---|----|----|----|--|
| 59S/M4 | 7314150199754 | 10 | 1 | M4 | 25 | 40 | |
| 59S/M5 | 7314150199778 | 10 | 1 | M5 | 25 | 40 | |
| 59S/M6 | 7314150199792 | 10 | 1 | M6 | 25 | 40 | |
| 59S/M8 | 7314150199808 | 10 | 1 | M8 | 25 | 40 | |

STANDARD SCREWDRIVER BITS - 50 MM



ASSORTMENT:

— 59S/50 | STANDARD SCREWDRIVER BITS SLOTTED - 50 MM

| 59S/50/3.5-2P | 7314150260027 | 2 | 1 | 0,6 | 3,5 | 50 | 23 | |
|---------------|---------------|---|---|-----|-----|----|----|--|
| 59S/50/4.0-2P | 7314150260041 | 2 | 1 | 0,8 | 4 | 50 | 23 | |
| 59S/50/5.5-2P | 7314150260065 | 2 | 1 | 0,8 | 5,5 | 50 | 27 | |
| 59S/50/6.0-2P | 7314150260089 | 2 | 1 | 1 | 6 | 50 | 28 | |
| 59S/50/6.5-2P | 7314150260102 | 2 | 1 | 1,2 | 6,5 | 50 | 30 | |

| 59S/50/0.6-3.5 | 7314150199976 | 5 | 1 | 0,6 | 3,5 | 50 | 30 | |
|----------------|---------------|---|---|-----|-----|----|------|--|
| 59S/50/0.8-4.0 | 7314150200009 | 5 | 1 | 0,8 | 4 | 50 | 30 | |
| 59S/50/0.8-5.5 | 7314150200023 | 5 | 1 | 0,8 | 5,5 | 50 | 30 | |
| 59S/50/1.0-6.0 | 7314150200047 | 5 | 1 | 1 | 6 | 50 | 36,5 | |
| 59S/50/1.2-6.5 | 7314150200061 | 5 | 1 | 1,2 | 6,5 | 50 | 36,5 | |

+ 59S/50PH | STANDARD SCREWDRIVER BITS PHILLIPS - 50 MM

| 59S/50PH1-2P | 7314150203642 | 2 | 1 | PH1 | 50 | 25 | |
|--------------|---------------|---|---|-----|----|----|--|
| 59S/50PH2-2P | 7314150203758 | 2 | 1 | PH2 | 50 | 30 | |
| 59S/50PH3-2P | 7314150203802 | 2 | 1 | PH3 | 50 | 30 | |

| 59S/50PH1 | 7314150199860 | 5 | 1 | PH1 | 50 | 70 | |
|-----------|---------------|---|---|-----|----|----|--|
| 59S/50PH2 | 7314150199877 | 5 | 1 | PH2 | 50 | 70 | |
| 59S/50PH3 | 7314150199891 | 5 | 1 | PH3 | 50 | 70 | |

+ 59S/50PZ | STANDARD SCREWDRIVER BITS POZIDRIV - 50 MM

| 59S/50PZ1-2P | 7314150204007 | 2 | 1 | PZ1 | 50 | 25 | |
|--------------|---------------|---|---|-----|----|----|--|
| 59S/50PZ2-2P | 7314150204014 | 2 | 1 | PZ2 | 50 | 30 | |
| 59S/50PZ3-2P | 7314150204021 | 2 | 1 | PZ3 | 50 | 30 | |

| 59S/50PZ1 | 7314150199914 | 5 | 1 | PZ1 | 50 | 70 | |
|-----------|---------------|---|---|-----|----|----|--|
| 59S/50PZ2 | 7314150199938 | 5 | 1 | PZ2 | 50 | 70 | |
| 59S/50PZ3 | 7314150199952 | 5 | 1 | PZ3 | 50 | 70 | |

59S/50T | STANDARD SCREWDRIVER BITS TORX® - 50 MM

| 59S/50T8-2P | 7314150262809 | 2 | 1 | T8 | 50 | 22 |
|--------------|---------------|---|---|-----|----|----|
| 59S/50T10-2P | 7314150201723 | 2 | 1 | T10 | 50 | 25 |
| 59S/50T15-2P | 7314150201730 | 2 | 1 | T15 | 50 | 25 |
| 59S/50T20-2P | 7314150201747 | 2 | 1 | T20 | 50 | 25 |
| 59S/50T25-2P | 7314150201754 | 2 | 1 | T25 | 50 | 25 |
| 59S/50T30-2P | 7314150201761 | 2 | 1 | T30 | 50 | 30 |
| 59S/50T40-2P | 7314150259281 | 2 | 1 | T40 | 50 | 32 |
| 59S/50T8 | 7314150200085 | 5 | 1 | T8 | 50 | 40 |

| 59S/50T10 | 7314150200092 | 5 | 1 | T10 | 50 | 40 |
|-----------|---------------|---|---|-----|----|----|
| 59S/50T15 | 7314150200108 | 5 | 1 | T15 | 50 | 40 |
| 59S/50T20 | 7314150200115 | 5 | 1 | T20 | 50 | 40 |
| 59S/50T25 | 7314150200122 | 5 | 1 | T25 | 50 | 50 |
| 59S/50T27 | 7314150200139 | 5 | 1 | T27 | 50 | 50 |
| 59S/50T30 | 7314150200146 | 5 | 1 | T30 | 50 | 50 |
| 59S/50T40 | 7314150200153 | 5 | 1 | T40 | 50 | 50 |

59S/50H | STANDARD SCREWDRIVER BITS HEX METRIC - 50 MM

| 59S/50H2-2P | 7314150259298 | 2 | 1 | 2 | 50 | 22 |
|---------------|---------------|---|---|-----|----|----|
| 59S/50H2.5-2P | 7314150259304 | 2 | 1 | 2,5 | 50 | 22 |
| 59S/50H3-2P | 7314150259335 | 2 | 1 | 3 | 50 | 24 |
| 59S/50H4-2P | 7314150259359 | 2 | 1 | 4 | 50 | 26 |
| 59S/50H5-2P | 7314150259373 | 2 | 1 | 5 | 50 | 29 |
| 59S/50H6-2P | 7314150259397 | 2 | 1 | 6 | 50 | 32 |
| 59S/50H8-2P | 7314150259410 | 2 | 1 | 8 | 50 | 40 |

| 59S/50H2 | 7314150200160 | 5 | 1 | 2 | 50 | 40 |
|------------|---------------|---|---|-----|----|----|
| 59S/50H2.5 | 7314150200177 | 5 | 1 | 2,5 | 50 | 40 |
| 59S/50H3 | 7314150200184 | 5 | 1 | 3 | 50 | 40 |
| 59S/50H4 | 7314150200191 | 5 | 1 | 4 | 50 | 40 |
| 59S/50H5 | 7314150200207 | 5 | 1 | 5 | 50 | 40 |
| 59S/50H6 | 7314150200214 | 5 | 1 | 6 | 50 | 40 |
| 59S/50H8 | 7314150200221 | 5 | 1 | 8 | 50 | 50 |

59S/50H" | STANDARD SCREWDRIVER BITS HEX IMPERIAL - 50 MM

| 59S/50H1/16 | 7314150248926 | 5 | 1 | 1/16 | 50 | 75 |
|-------------|---------------|---|---|------|----|----|
| 59S/50H5/64 | 7314150249015 | 5 | 1 | 5/64 | 50 | 75 |
| 59S/50H3/32 | 7314150248964 | 5 | 1 | 3/32 | 50 | 76 |
| 59S/50H7/64 | 7314150248995 | 5 | 1 | 7/64 | 50 | 76 |
| 59S/50H1/8 | 7314150248940 | 5 | 1 | 1/8 | 50 | 77 |
| 59S/50H9/64 | 7314150249039 | 5 | 1 | 9/64 | 50 | 77 |

| 59S/50H5/32 | 7314150249022 | 5 | 1 | 5/32 | 50 | 78 |
|-------------|---------------|---|---|------|----|----|
| 59S/50H3/16 | 7314150248988 | 5 | 1 | 3/16 | 50 | 78 |
| 59S/50H7/32 | 7314150248933 | 5 | 1 | 7/32 | 50 | 79 |
| 59S/50H1/4 | 7314150249008 | 5 | 1 | 1/4 | 50 | 79 |
| 59S/50H5/16 | 7314150248957 | 5 | 1 | 5/16 | 50 | 80 |
| 59S/50H3/8 | 7314150248971 | 5 | 1 | 3/8 | 50 | 80 |

59S/50R | STANDARD SCREWDRIVER BITS ROBERTSON® - 50 MM

| 59S/50R1-2P | 7314150259441 | 2 | 1 | #1 | 50 | 24 |
|-------------|---------------|---|---|----|----|----|
| 59S/50R2-2P | 7314150259472 | 2 | 1 | #2 | 50 | 26 |
| 59S/50R3-2P | 7314150259502 | 2 | 1 | #3 | 50 | 28 |

| 59S/50R1 | 7314150200238 | 5 | 1 | #1 | 50 | 40 |
|----------|---------------|---|---|----|----|----|
| 59S/50R2 | 7314150200245 | 5 | 1 | #2 | 50 | 40 |
| 59S/50R3 | 7314150200252 | 5 | 1 | #3 | 50 | 40 |

STANDARD SCREWDRIVER BITS - 70 MM



ASSORTMENT:

PHILLIPS | STANDARD SCREWDRIVER BITS PHILLIPS - 70 MM

| 59S/70PH1-2P | | 7314150259526 | 2 | 1 | PH1 | 70 | 31 |
|--------------|--|---------------|---|---|-----|----|----|
| 59S/70PH2-2P | | 7314150259557 | 2 | 1 | PH2 | 70 | 38 |

| 59S/70PH1 | | 7314150200269 | 5 | 1 | PH1 | 70 | 70 |
|-----------|--|---------------|---|---|-----|----|----|
| 59S/70PH2 | | 7314150200276 | 5 | 1 | PH2 | 70 | 70 |

POZIDRIV | STANDARD SCREWDRIVER BITS POZIDRIV - 70 MM

| 59S/70PZ1-2P | | 7314150259564 | 2 | 1 | PZ1 | 70 | 32 |
|--------------|--|---------------|---|---|-----|----|----|
| 59S/70PZ2-2P | | 7314150260331 | 2 | 1 | PZ2 | 70 | 38 |
| 59S/70PZ3-2P | | 7314150260348 | 2 | 1 | PZ3 | 70 | 38 |

| 59S/70PZ1 | | 7314150200283 | 5 | 1 | PZ1 | 70 | 70 |
|-----------|--|---------------|---|---|-----|----|----|
| 59S/70PZ2 | | 7314150200290 | 5 | 1 | PZ2 | 70 | 70 |
| 59S/70PZ3 | | 7314150200306 | 5 | 1 | PZ3 | 70 | 80 |

TORX® | STANDARD SCREWDRIVER BITS TORX® - 70 MM

| 59S/70T10-2P | | 7314150260355 | 2 | 1 | T10 | 70 | 28 |
|--------------|--|---------------|---|---|-----|----|----|
| 59S/70T15-2P | | 7314150260362 | 2 | 1 | T15 | 70 | 30 |
| 59S/70T20-2P | | 7314150201839 | 2 | 1 | T20 | 70 | 25 |
| 59S/70T25-2P | | 7314150260379 | 2 | 1 | T25 | 70 | 32 |
| 59S/70T27-2P | | 7314150260386 | 2 | 1 | T27 | 70 | 38 |
| 59S/70T30-2P | | 7314150260393 | 2 | 1 | T30 | 70 | 38 |
| 59S/70T40-2P | | 7314150260409 | 2 | 1 | T40 | 70 | 44 |

| 59S/70T10 | | 7314150200313 | 5 | 1 | T10 | 70 | 70 |
|-----------|--|---------------|---|---|-----|----|----|
| 59S/70T15 | | 7314150200566 | 5 | 1 | T15 | 70 | 70 |
| 59S/70T20 | | 7314150200573 | 5 | 1 | T20 | 70 | 70 |
| 59S/70T25 | | 7314150200580 | 5 | 1 | T25 | 70 | 80 |
| 59S/70T27 | | 7314150200597 | 5 | 1 | T27 | 70 | 80 |
| 59S/70T30 | | 7314150200603 | 5 | 1 | T30 | 70 | 80 |
| 59S/70T40 | | 7314150200610 | 5 | 1 | T40 | 70 | 80 |

TORX® TAMPER | STANDARD SCREWDRIVER BITS TORX® TAMPER - 70 MM

| 59S/70TR15-2P | | 7314150260416 | 2 | 1 | TR15 | 70 | 28 |
|---------------|--|---------------|---|---|------|----|----|
| 59S/70TR20-2P | | 7314150260423 | 2 | 1 | TR20 | 70 | 32 |
| 59S/70TR25-2P | | 7314150260430 | 2 | 1 | TR25 | 70 | 34 |
| 59S/70TR27-2P | | 7314150260447 | 2 | 1 | TR27 | 70 | 38 |
| 59S/70TR30-2P | | 7314150260454 | 2 | 1 | TR30 | 70 | 40 |
| 59S/70TR40-2P | | 7314150260461 | 2 | 1 | TR40 | 70 | 44 |

| 59S/70TR15 | | 7314150200627 | 5 | 1 | TR15 | 70 | 70 |
|------------|--|---------------|---|---|------|----|----|
| 59S/70TR20 | | 7314150200634 | 5 | 1 | TR20 | 70 | 70 |
| 59S/70TR25 | | 7314150200641 | 5 | 1 | TR25 | 70 | 80 |
| 59S/70TR27 | | 7314150200658 | 5 | 1 | TR27 | 70 | 80 |
| 59S/70TR30 | | 7314150200665 | 5 | 1 | TR30 | 70 | 80 |
| 59S/70TR40 | | 7314150200672 | 5 | 1 | TR40 | 70 | 80 |

STANDARD SCREWDRIVER BITS - 89 MM



FEATURES:

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Zinc phosphated
- Material: High-performance alloy steel
- Application: For all screw applications in trade and industry
- Hex ball point bits facilitate working in confined spaces by allowing use at an angle

ASSORTMENT:

59S/H BALL STANDARD SCREWDRIVER BITS HEX BALL POINT METRIC - 89 MM

| | | X | | | | |
|---------------|---------------|---|---|---------|----|----|
| 59S/H3BALL-2P | 7314150260478 | 2 | 1 | 3 | 89 | 52 |
| 59S/H4BALL-2P | 7314150260485 | 2 | 1 | 4 | 89 | 52 |
| 59S/H5BALL-2P | 7314150260492 | 2 | 1 | 5 | 89 | 52 |
| 59S/H6BALL-2P | 7314150260508 | 2 | 1 | 6 | 89 | 55 |
| 59S/H8BALL-2P | 7314150260515 | 2 | 1 | 8 | 89 | 72 |
| 59S/HBALL-3P | 7314150201716 | 3 | 1 | 5, 6, 8 | 89 | 84 |

| | | X | | | | |
|------------|---------------|---|---|---|----|----|
| 59S/H3BALL | 7314150200689 | 5 | 1 | 3 | 89 | 90 |
| 59S/H4BALL | 7314150200696 | 5 | 1 | 4 | 89 | 90 |
| 59S/H5BALL | 7314150200702 | 5 | 1 | 5 | 89 | 90 |
| 59S/H6BALL | 7314150200719 | 5 | 1 | 6 | 89 | 90 |
| 59S/H8BALL | 7314150200726 | 5 | 1 | 8 | 89 | 90 |

STANDARD SCREWDRIVER BITS - 125 MM



FEATURES:

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Zinc phosphated
- Material: High-performance alloy steel
- Application: For all screw applications in trade and industry

ASSORTMENT:

59S/125PH STANDARD SCREWDRIVER BITS PHILLIPS - 125 MM

| | | X | | | | |
|---------------|---------------|---|---|-----|-----|----|
| 59S/125PH1-2P | 7314150260553 | 2 | 1 | PH1 | 125 | 48 |
| 59S/125PH2-2P | 7314150260560 | 2 | 1 | PH2 | 125 | 64 |
| 59S/125PH3-2P | 7314150260577 | 2 | 1 | PH3 | 125 | 64 |

| | | X | | | | |
|------------|---------------|---|---|-----|-----|-----|
| 59S/125PH1 | 7314150206834 | 5 | 1 | PH1 | 125 | 100 |
| 59S/125PH2 | 7314150204298 | 5 | 1 | PH2 | 125 | 100 |
| 59S/125PH3 | 7314150204304 | 5 | 1 | PH3 | 125 | 100 |

59S/125PZ STANDARD SCREWDRIVER BITS POZIDRIV - 125 MM

| | | X | | | | |
|---------------|---------------|---|---|-----|-----|----|
| 59S/125PZ1-2P | 7314150260522 | 2 | 1 | PZ1 | 125 | 48 |
| 59S/125PZ2-2P | 7314150260539 | 2 | 1 | PZ2 | 125 | 66 |
| 59S/125PZ3-2P | 7314150260546 | 2 | 1 | PZ3 | 125 | 66 |

| | | X | | | | |
|------------|---------------|---|---|-----|-----|-----|
| 59S/125PZ1 | 7314150200733 | 5 | 1 | PZ1 | 125 | 100 |
| 59S/125PZ2 | 7314150200740 | 5 | 1 | PZ2 | 125 | 100 |
| 59S/125PZ3 | 7314150200757 | 5 | 1 | PZ3 | 125 | 100 |

59S/PH COMBI STANDARD SCREWDRIVER BITS PHILLIPS/SLOTTED COMBI - 125 MM

| | | X | | | | | |
|-----------------|---------------|---|---|---|-----|-----|----|
| 59S/PH1COMBI-2P | 7314150215669 | 2 | 1 | 5 | PH1 | 125 | 60 |
| 59S/PH2COMBI-2P | 7314150203604 | 2 | 1 | 6 | PH2 | 125 | 60 |

| | | X | | | | | |
|-----------------|---------------|---|---|---|-----|-----|----|
| 59S/PH3COMBI-2P | 7314150203611 | 2 | 1 | 8 | PH3 | 125 | 60 |

STANDARD SCREWDRIVER BITS - 150 MM



FEATURES:

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Zinc phosphated
- Material: High-performance alloy steel
- Application: For all screw applications in trade and industry
- Hex ball point bits facilitate working in confined spaces by allowing use at an angle

ASSORTMENT:

★ 59S/150T | STANDARD SCREWDRIVER BITS TORX® - 150 MM

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|---------------|---------------|--------|------|------|------|------|------|
| 59S/150T15-2P | 7314150260584 | 2 | 1 | T15 | 150 | 48 | |
| 59S/150T20-2P | 7314150260591 | 2 | 1 | T20 | 150 | 58 | |
| 59S/150T25-2P | 7314150260607 | 2 | 1 | T25 | 150 | 60 | |
| 59S/150T30-2P | 7314150260614 | 2 | 1 | T30 | 150 | 78 | |

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|------------|---------------|--------|------|------|------|------|------|
| 59S/150T15 | 7314150200764 | 5 | 1 | T15 | 150 | 150 | |
| 59S/150T20 | 7314150200771 | 5 | 1 | T20 | 150 | 150 | |
| 59S/150T25 | 7314150200788 | 5 | 1 | T25 | 150 | 150 | |
| 59S/150T30 | 7314150200795 | 5 | 1 | T30 | 150 | 150 | |

STANDARD SCREWDRIVER BITS 5/16" - 30 TO 41 MM



FEATURES:

- Drive: 5/16" DIN 3126-C 8, ISO 1173
- Finish: Zinc phosphated
- Material: High performance alloy steel

ASSORTMENT:

— 70S | STANDARD SCREWDRIVER BITS 5/16" SLOTTED - 41 MM

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon | Icon |
|-----------------|---------------|--------|------|------|------|------|------|------|
| 70S/1.2-8.0-2P | 7314150262823 | 2 | 1 | 1,2 | 8 | 41 | 38 | |
| 70S/1.6-9.0-2P | 7314150261024 | 2 | 1 | 1,6 | 9 | 41 | 38 | |
| 70S/1.6-10.0-2P | 7314150261017 | 2 | 1 | 1,6 | 10 | 41 | 44 | |
| 70S/2.0-12.0-2P | 7314150261086 | 2 | 1 | 2 | 12 | 41 | 52 | |
| 70S/2.5-14.0-2P | 7314150261147 | 2 | 1 | 2,5 | 14 | 41 | 60 | |

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon | Icon |
|--------------|---------------|--------|------|------|------|------|------|------|
| 70S/1.2-8.0 | 7314150218387 | 5 | 1 | 1,2 | 8 | 41 | 100 | |
| 70S/1.6-9.0 | 7314150218400 | 5 | 1 | 1,6 | 9 | 41 | 105 | |
| 70S/1.6-10.0 | 7314150218394 | 5 | 1 | 1,6 | 10 | 41 | 110 | |
| 70S/2.0-12.0 | 7314150218417 | 5 | 1 | 2 | 12 | 41 | 120 | |
| 70S/2.5-14.0 | 7314150218424 | 5 | 1 | 2,5 | 14 | 41 | 140 | |

— 70S/PH | STANDARD SCREWDRIVER BITS 5/16" PHILLIPS - 32 TO 38 MM

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|------------|---------------|--------|------|------|------|------|------|
| 70S/PH1-2P | 7314150260621 | 2 | 1 | PH1 | 32 | 30 | |
| 70S/PH2-2P | 7314150260638 | 2 | 1 | PH2 | 32 | 30 | |
| 70S/PH3-2P | 7314150260645 | 2 | 1 | PH3 | 32 | 30 | |
| 70S/PH4-2P | 7314150260652 | 2 | 1 | PH4 | 38 | 36 | |

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|---------|---------------|--------|------|------|------|------|------|
| 70S/PH1 | 7314150217557 | 5 | 1 | PH1 | 32 | 75 | |
| 70S/PH2 | 7314150217564 | 5 | 1 | PH2 | 32 | 75 | |
| 70S/PH3 | 7314150217571 | 5 | 1 | PH3 | 32 | 75 | |
| 70S/PH4 | 7314150217588 | 5 | 1 | PH4 | 38 | 85 | |

— 70S/PZ | STANDARD SCREWDRIVER BITS 5/16" POZIDRIV - 32 TO 38 MM

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|------------|---------------|--------|------|------|------|------|------|
| 70S/PZ1-2P | 7314150260683 | 2 | 1 | PZ1 | 32 | 30 | |
| 70S/PZ2-2P | 7314150260706 | 2 | 1 | PZ2 | 32 | 30 | |
| 70S/PZ3-2P | 7314150260720 | 2 | 1 | PZ3 | 32 | 30 | |
| 70S/PZ4-2P | 7314150260737 | 2 | 1 | PZ4 | 38 | 36 | |

| Icon | Barcode | Icon X | Icon | Icon | Icon | Icon | Icon |
|---------|---------------|--------|------|------|------|------|------|
| 70S/PZ1 | 7314150217595 | 5 | 1 | PZ1 | 32 | 75 | |
| 70S/PZ2 | 7314150217601 | 5 | 1 | PZ2 | 32 | 75 | |
| 70S/PZ3 | 7314150217724 | 5 | 1 | PZ3 | 32 | 75 | |
| 70S/PZ4 | 7314150217731 | 5 | 1 | PZ4 | 38 | 85 | |

★ 70S/T | STANDARD SCREWDRIVER BITS 5/16" TORX® - 35 MM

| 70S/T20-2P | 7314150260744 | 2 | 1 | T20 | 35 | 30 |
|------------|---------------|---|---|-----|----|----|
| 70S/T25-2P | 7314150260812 | 2 | 1 | T25 | 35 | 30 |
| 70S/T27-2P | 7314150260867 | 2 | 1 | T27 | 35 | 31 |
| 70S/T30-2P | 7314150260881 | 2 | 1 | T30 | 35 | 32 |
| 70S/T40-2P | 7314150260898 | 2 | 1 | T40 | 35 | 32 |
| 70S/T45-2P | 7314150260904 | 2 | 1 | T45 | 35 | 34 |
| 70S/T50-2P | 7314150260911 | 2 | 1 | T50 | 35 | 36 |
| 70S/T55-2P | 7314150260928 | 2 | 1 | T55 | 35 | 44 |

| 70S/T20 | 7314150217748 | 5 | 1 | T20 | 35 | 65 |
|---------|---------------|---|---|-----|----|-----|
| 70S/T25 | 7314150217755 | 5 | 1 | T25 | 35 | 65 |
| 70S/T27 | 7314150217762 | 5 | 1 | T27 | 35 | 65 |
| 70S/T30 | 7314150217779 | 5 | 1 | T30 | 35 | 65 |
| 70S/T40 | 7314150217786 | 5 | 1 | T40 | 35 | 65 |
| 70S/T45 | 7314150217793 | 5 | 1 | T45 | 35 | 80 |
| 70S/T50 | 7314150217809 | 5 | 1 | T50 | 35 | 80 |
| 70S/T55 | 7314150217816 | 5 | 1 | T55 | 35 | 105 |

● 70S/H | STANDARD SCREWDRIVER BITS 5/16" HEX METRIC - 30 MM

| 70S/H4-2P | 7314150261352 | 2 | 1 | 4 | 30 | 26 |
|------------|---------------|---|---|----|----|----|
| 70S/H5-2P | 7314150261406 | 2 | 1 | 5 | 30 | 28 |
| 70S/H6-2P | 7314150261437 | 2 | 1 | 6 | 30 | 30 |
| 70S/H7-2P | 7314150261444 | 2 | 1 | 7 | 30 | 30 |
| 70S/H8-2P | 7314150262847 | 2 | 1 | 8 | 30 | 32 |
| 70S/H10-2P | 7314150261451 | 2 | 1 | 10 | 30 | 40 |
| 70S/H12-2P | 7314150261468 | 2 | 1 | 12 | 30 | 46 |
| 70S/H14-2P | 7314150261475 | 2 | 1 | 14 | 30 | 54 |

| 70S/H4 | 7314150218431 | 5 | 1 | 4 | 30 | 60 |
|---------|---------------|---|---|----|----|-----|
| 70S/H5 | 7314150218448 | 5 | 1 | 5 | 30 | 65 |
| 70S/H6 | 7314150218455 | 5 | 1 | 6 | 30 | 65 |
| 70S/H7 | 7314150218462 | 5 | 1 | 7 | 30 | 75 |
| 70S/H8 | 7314150218479 | 5 | 1 | 8 | 30 | 80 |
| 70S/H10 | 7314150218486 | 5 | 1 | 10 | 30 | 95 |
| 70S/H12 | 7314150218493 | 5 | 1 | 12 | 30 | 115 |
| 70S/H14 | 7314150218509 | 5 | 1 | 14 | 30 | 140 |

+ 70S/TS | STANDARD SCREWDRIVER BITS 5/16" TORQ-SET® METRIC & IMPERIAL - 32 MM

| 70S/TS8-2P | 7314150260966 | 2 | 1 | 8 | 32 | 30 |
|---------------|---------------|---|---|------|----|----|
| 70S/TS10-2P | 7314150260942 | 2 | 1 | 10 | 32 | 30 |
| 70S/TS1/4-2P | 7314150260935 | 2 | 1 | 1/4 | 32 | 32 |
| 70S/TS5/16-2P | 7314150260959 | 2 | 1 | 5/16 | 32 | 30 |

| 70S/TS8 | 7314150218370 | 5 | 1 | 8 | 32 | 70 |
|------------|---------------|---|---|------|----|----|
| 70S/TS10 | 7314150218356 | 5 | 1 | 10 | 32 | 75 |
| 70S/TS1/4 | 7314150218349 | 5 | 1 | 1/4 | 32 | 75 |
| 70S/TS5/16 | 7314150218363 | 5 | 1 | 5/16 | 32 | 70 |

STANDARD SCREWDRIVER BITS 5/32"



FEATURES:

- Drive: 5/32" DIN 3126-C 4, ISO 1173
- Material: High performance alloy steel
- Finish: Zinc phosphated

ASSORTMENT:

+ 45S/PH | STANDARD SCREWDRIVER BITS PHILLIPS 5/32" - 25 MM

| 45S/PH1-2P | 7314150261482 | 2 | 1 | PH1 | 25 | 10 |
|------------|---------------|---|---|-----|----|----|
| 45S/PH2-2P | 7314150261499 | 2 | 1 | PH2 | 25 | 11 |

| 45S/PH1 | 7314150218516 | 5 | 1 | PH1 | 25 | 25 |
|---------|---------------|---|---|-----|----|----|
| 45S/PH2 | 7314150218523 | 5 | 1 | PH2 | 25 | 25 |

● 45S/H | STANDARD SCREWDRIVER BITS HEX 5/32" - 20 MM

| 45S/H1.5-2P | 7314150261505 | 2 | 1 | 1.5 | 20 | 9 |
|-------------|---------------|---|---|-----|----|---|
| 45S/H2-2P | 7314150261512 | 2 | 1 | 2 | 20 | 9 |
| 45S/H2.5-2P | 7314150261529 | 2 | 1 | 2.5 | 20 | 9 |
| 45S/H3-2P | 7314150261536 | 2 | 1 | 3 | 20 | 9 |

| 45S/H1.5 | 7314150218530 | 5 | 1 | 1.5 | 20 | 20 |
|----------|---------------|---|---|-----|----|----|
| 45S/H2 | 7314150218547 | 5 | 1 | 2 | 20 | 25 |
| 45S/H2.5 | 7314150218554 | 5 | 1 | 2.5 | 20 | 25 |
| 45S/H3 | 7314150218561 | 5 | 1 | 3 | 20 | 20 |

STANDARD SCREWDRIVER BITS 7/16" - 35 MM



FEATURES:

- Drive: 11.2 mm (7/16") DIN 3126-E11,2, ISO 1173
- Finish: Zinc phosphated
- Material: High-performance alloy steel
- Bit holding: Locking screw
- Suitable adaptors, 7809H

ASSORTMENT:

74S/H | STANDARD SCREWDRIVER BITS HEX - 35 MM

| 74S/H4-2P | 7314150261543 | 2 | 1 | 4 | 35 | 48 |
|------------|---------------|---|---|----|----|----|
| 74S/H5-2P | 7314150261550 | 2 | 1 | 5 | 35 | 50 |
| 74S/H6-2P | 7314150261567 | 2 | 1 | 6 | 35 | 52 |
| 74S/H7-2P | 7314150261574 | 2 | 1 | 7 | 35 | 54 |
| 74S/H8-2P | 7314150261611 | 2 | 1 | 8 | 35 | 56 |
| 74S/H10-2P | 7314150261635 | 2 | 1 | 10 | 35 | 64 |
| 74S/H12-2P | 7314150261659 | 2 | 1 | 12 | 35 | 72 |
| 74S/H14-2P | 7314150261666 | 2 | 1 | 14 | 35 | 80 |
| 74S/H17-2P | 7314150261673 | 2 | 1 | 17 | 35 | 96 |

| 74S/H4 | 7314150218578 | 5 | 1 | 4 | 35 | 115 |
|---------|---------------|---|---|----|----|-----|
| 74S/H5 | 7314150218585 | 5 | 1 | 5 | 35 | 120 |
| 74S/H6 | 7314150218592 | 5 | 1 | 6 | 35 | 125 |
| 74S/H7 | 7314150218608 | 5 | 1 | 7 | 35 | 125 |
| 74S/H8 | 7314150218615 | 5 | 1 | 8 | 35 | 130 |
| 74S/H10 | 7314150218622 | 5 | 1 | 10 | 35 | 150 |
| 74S/H12 | 7314150218639 | 5 | 1 | 12 | 35 | 190 |
| 74S/H14 | 7314150218646 | 5 | 1 | 14 | 35 | 190 |
| 74S/H17 | 7314150218653 | 5 | 1 | 17 | 35 | 240 |

STANDARD SCREWDRIVER BITS THREAD DRIVE - 44,5 MM



FEATURES:

- Screwdriver Bits with tread drive optimised for use in stationary machines
- DUOFAST automatic screwdriver, for BOSCH, FEIN and MAKITA screwdrivers or HOLZ-HER magazine screwdrivers
- Steel-grey, greased finish
- High-performance alloy steel
- Length: 44.5mm
- Packed individually in a plastic bag

PHILLIPS:

- K18NF-2: Screw thread 10/32" UNF
- K18PH-2M5: Screw thread M5
- K18PH-2M6: Screw thread M6

POZIDRIV:

- K19PZD-2NF: Screw thread 10/32" UNF
- K19PZD-2M5: Screw thread M5

TORX®:

- Screw thread 10/32" UNF

ASSORTMENT:

K18 | STANDARD SCREWDRIVER BITS THREAD DRIVE PHILLIPS - 44,5 MM

| K18NF-2 | 7314151347161 | 1 | 5 | PH2 | 44,5 | 12 |
|-----------|---------------|---|---|-----|------|----|
| K18PH-2M5 | 7314153019646 | 1 | 5 | PH2 | 45,5 | 12 |
| K18PH-2M6 | 7314150274871 | 1 | 5 | PH2 | 45,5 | 12 |

K19PZD-2NF | STANDARD SCREWDRIVER BITS THREAD DRIVE POZIDRIV - 44,5 MM

| K19PZD-2NF | 7314151586157 | 1 | 10 | P22 | 44,5 | 12 |
|------------|---------------|---|----|-----|------|----|
| K19PZD-2M5 | 7314151693237 | 1 | 10 | P22 | 44,5 | 12 |

K20TORX | STANDARD SCREWDRIVER BITS THREAD DRIVE TORX® - 44,5 MM

| K20TORX-T25 | 7314151825799 | 1 | 10 | T25 | 44,5 | 10 |
|-------------|---------------|---|----|-----|------|----|

59S/7

STANDARD SCREWDRIVER BIT SET AND BIT HOLDER - 7 PCS



FEATURES:

- 7 pcs bit set: 6 bits and 1 universal bit holder
- In a hanging cardboard sleeve
- Drive: 1/4" DIN 3126-C6.3, ISO 1173

ASSORTMENT:

| | | | | | | | |
|---------|---------------|---|---|----|----|----|-----|
| | | | | | | | |
| 59S/7-1 | 7314150191536 | 7 | 1 | 75 | 65 | 22 | 105 |

| | | | | | | | |
|---------|---------------|---|---|----|----|----|-----|
| | | | | | | | |
| 59S/7-2 | 7314150191543 | 7 | 1 | 75 | 65 | 22 | 105 |

| | | | | | | | |
|---------|---------------|---|---|----|----|----|-----|
| | | | | | | | |
| 59S/7-3 | 7314150191550 | 7 | 1 | 75 | 65 | 22 | 105 |

| | | | | | | | |
|---------|---------------|---|---|----|----|----|-----|
| | | | | | | | |
| 59S/7-4 | 7314150191567 | 7 | 1 | 75 | 65 | 22 | 105 |

- Finish: Zinc phosphate
- Material: High-performance alloy steel

SET CONTAINS:

| | | |
|--------------|--|--|
| 59S/PH1, PH2 | | |
| 59S/PZ1, PZ2 | | |
| 59S/T15, T20 | | |
| 1/4" - 50 mm | | |

| | | |
|-----------------------|--|--|
| 59S/PH2 | | |
| 59S/T15, 2xT20, 2xT25 | | |
| 1/4" - 50 mm | | |

| | | |
|--|--|--|
| 59S/TR10, TR15, TR20, TR25, TR30, TR40 | | |
| 1/4" - 50 mm | | |

| | | |
|----------------------------------|--|--|
| 59S/T10, T15, T20, T25, T30, T40 | | |
| 1/4" - 50 mm | | |

59S/17

STANDARD SCREWDRIVER BIT SET AND BIT HOLDER - 17 PCS



FEATURES:

- 17 pcs bit set: 16 bits and 1 magnetic quick-release bit holder
- In cardboard packaging

ASSORTMENT:

| | | | | | | | |
|----------|---------------|----|---|----|----|----|-----|
| | | | | | | | |
| 59S/17-1 | 7314150191499 | 17 | 1 | 82 | 73 | 27 | 130 |

| | | | | | | | |
|----------|---------------|----|---|----|----|----|-----|
| | | | | | | | |
| 59S/17-2 | 7314150191505 | 17 | 1 | 82 | 73 | 27 | 130 |

| | | | | | | | |
|----------|---------------|----|---|----|----|----|-----|
| | | | | | | | |
| 59S/17-3 | 7314150191512 | 17 | 1 | 82 | 73 | 27 | 130 |

- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Zinc phosphate
- Material: High-performance alloy steel

SET CONTAINS:


| | |
|----------------------------|--|
| 59S/3.0, 4.5, 5.5 mm | |
| 59S/PH1, 3xPH2, 2xPH2G | |
| 59S/PZ1, 2xPZ2 | |
| 59S/H3.0, 4.0, 5.0, 6.0 mm | |
| 1/4" - 50 mm | |

| | |
|---|--|
| 59S/T7, T8, T9, T10, 2xT15, 3xT20, 3xT25, T27, 2xT30, T40 | |
| 1/4" - 50 mm | |

| | |
|---------------------------------------|--|
| 59S/PH1, 2xPH2 | |
| 59S/PZ1, PZ2, PZ3 | |
| 59S/T10, T15, T20, T25, T27, T30, T40 | |
| 59S/H3.0, 4.0, 5.0 mm | |
| 1/4" - 50 mm | |

59S/22

STANDARD SCREWDRIVER BIT SET, BIT HOLDER AND 1/4" SOCKET ADAPTOR - 22 PCS

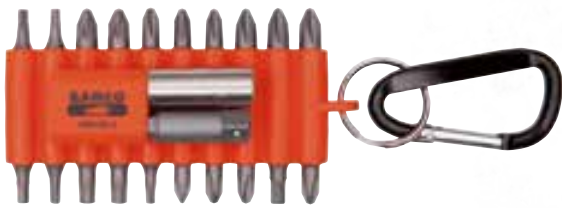

FEATURES:

- 22 pcs rubber holder: 20 bits, 1 universal magnetic bit holder and 1 socket adaptor 1/4"
- In a hanging cardboard sleeve

- Drive: 1/4" DIN 3126-C6.3,ISO 1173
- Finish: Zinc phosphate
- Material: High-performance alloy steel

ASSORTMENT:

| | | | | | | | |
|----------|---------------|----|---|----|----|----|-----|
| | | | | | | | |
| 59S/22-1 | 7314150204229 | 22 | 1 | 80 | 50 | 20 | 155 |

| | | | | | | | |
|----------|---------------|----|---|----|----|----|-----|
| | | | | | | | |
| 59S/22-2 | 7314150204236 | 22 | 1 | 80 | 50 | 20 | 155 |

SET CONTAINS:

| | | |
|---|--|--|
| 59S/3.0, 4.5, 5.5 mm | | |
| 59S/PH1, PH2, PH3, PH2G | | |
| 59S/PZ1, PZ2, PZ3 | | |
| 59S/T6, T8, T9, T10, T15, T20, T25, T27, T30, T40 | | |
| 1/4" - 50 mm | | |
| K6650-1/4" - 50 mm | | |

| | | |
|------------------------------|--|--|
| 59S/2.5, 3.0 mm | | |
| 3x59S/PH2, 3xPH2G | | |
| 2x59S/PZ2 | | |
| 59S/T10, 4xT15, 3xT20, 2xT25 | | |
| 1/4" - 50 mm | | |
| K6650-1/4" - 50 mm | | |

59/S28

STANDARD SCREWDRIVER BIT SET, BIT HOLDER AND 1/4" SOCKET ADAPTOR - 28 PCS



FEATURES:

- 28 pcs set: 26 bits + 1 adaptor + 1 universal holder
- Small box with rounded corners that can be easily stored in a pocket

ASSORTMENT:

| | | | | | | | | |
|----------|---------------|----|---|----|-----|----|-----|--|
| | | | | | | | | |
| 59/S28-4 | 7314151847173 | 28 | 1 | 30 | 110 | 55 | 155 | |

SET CONTAINS:

| | | |
|--|--|--|
| 59S/0.6x4.5, 1.2x6.5, 1.2x8.0 mm | | |
| 2x59S/PH1, 2xPH2, PH3 | | |
| 59S/T6, T15 | | |
| 59S/H1/8, 3/16, 3/32, 5/32, 5/64, 7/32, 7/64, 9/64 | | |
| 2x59S/TS-4, 2xTS-6, 2xTS-8, 2xTS-10 | | |
| K6625-1/4 | | |
| KM653 | | |

59/S31B

STANDARD SCREWDRIVER BIT SET, BIT HOLDER AND 1/4" SOCKET ADAPTOR - 31 PCS



FEATURES:

- 31 pcs bit set for slotted, Phillips, Pozidriv, TORX®, Hexagon head screws, bit holder and socket adaptor 1/4"
- In cardboard packaging
- Drive: 1/4" DIN 3126-C6.3, ISO 1173

- Finish: Sand blasting
- Material: S2 high-alloy steel
- 59/S31B-IP: in bulk. Served in a counter display of 12 pcs

ASSORTMENT:


| | | | | | | | |
|---------|---------------|----|---|-------|-------|-------|-----|
| | | | | | | | |
| 59/S31B | 7314150325788 | 31 | 1 | 65,35 | 104,9 | 40,25 | 244 |

SET CONTAINS:

| | | | | |
|--|--------------------------|---------------------|------|---|
| | Slotted | 4.5 | 25mm | 1 |
| | Slotted | 5.5 | 25mm | 1 |
| | Phillips | PH1 | 25mm | 1 |
| | Phillips | PH2 | 25mm | 3 |
| | Phillips | PH3 | 25mm | 1 |
| | Grabber Phillips | PH2G | 25mm | 2 |
| | Pozidriv | PZ1 | 25mm | 1 |
| | Pozidriv | PZ2 | 25mm | 3 |
| | Pozidriv | PZ3 | 25mm | 1 |
| | TORX | T10 | 25mm | 1 |
| | TORX | T15 | 25mm | 3 |
| | TORX | T20 | 25mm | 3 |
| | TORX | T25 | 25mm | 2 |
| | TORX | T27 | 25mm | 1 |
| | TORX | T30 | 25mm | 1 |
| | Hexagonal | HEX3 | 25mm | 1 |
| | Hexagonal | HEX4 | 25mm | 1 |
| | Hexagonal | HEX5 | 25mm | 1 |
| | Hexagonal | HEX6 | 25mm | 1 |
| | Socket adaptor | socket adaptor 1/4" | 25mm | 1 |
| | Quick release bit holder | KM653-QR*1 | 60mm | 1 |

59S/31

STANDARD SCREWDRIVER BIT SET AND BIT HOLDER - 31 PCS



FEATURES:

- 31 pcs bits set: 30 bits and 1 magnetic quick-release bit holder
- In cardboard packaging

- Drive: 1/4" DIN 3126-C6.3, ISO 1173
- Finish: Zinc phosphate
- Material: High-performance alloy steel

ASSORTMENT:

| Icon | Barcode | Quantity | Icon | Quantity | Icon | Quantity | Icon | Quantity |
|----------|---------------|----------|------|----------|------|----------|------|----------|
| | | | | | | | | |
| 59S/31-1 | 7314150191451 | 31 | 1 | 110 | 65 | 42 | 250 | |

| Icon | Barcode | Quantity | Icon | Quantity | Icon | Quantity | Icon | Quantity |
|----------|---------------|----------|------|----------|------|----------|------|----------|
| | | | | | | | | |
| 59S/31-2 | 7314150191468 | 31 | 1 | 110 | 65 | 42 | 250 | |

| Icon | Barcode | Quantity | Icon | Quantity | Icon | Quantity | Icon | Quantity |
|----------|---------------|----------|------|----------|------|----------|------|----------|
| | | | | | | | | |
| 59S/31-3 | 7314150191475 | 31 | 1 | 110 | 65 | 42 | 245 | |

SET CONTAINS:

| | | |
|--|--|--|
| 59S/0.5x3.0, 0.6x4.5, 0.8x5.5 mm | | |
| 59S/PH1, 3xPH2, PH3, 2xPH2G | | |
| 59S/PZ1, 3xPZ2, PZ3 | | |
| 59S/T10, 3xT15, 3xT20, 2xT25, T27, T30 | | |
| 59S/H3.0, 4.0, 5.0, 6.0 mm | | |
| KM-QR 1/4" - 60 mm | | |

| | | |
|---------------------------------------|--|--|
| 4x59S/PH2, 4xPH2G | | |
| 4x59S/PZ2 | | |
| 2x59S/T10, 4xT15, 5xT20, 5xT25, 2xT30 | | |
| KM653-QR 1/4" - 60 mm | | |

| | | |
|--|--|--|
| 2x59S/PH1, 2xPH2, PH3 | | |
| 2x59S/PZ1, 2xPZ2, PZ3 | | |
| 2x59S/TR10, 3xTR15, 5xTR20, 4xTR25, TR27, 4xTR30, TR40 | | |
| KM653-QR 1/4" - 60 mm | | |

59/S54BC

STANDARD SCREWDRIVER BIT SET, BIT HOLDERS AND 1/4" SOCKET ADAPTOR - 54 PCS



FEATURES:

- 54 pcs bit set for Slotted, Phillips, Pozidriv, Hexagonal, Robertson and coloured TORX®, TORX® Tamper, head screws
- Drive: 1/4" DIN 3126-C6.3, ISO 1173

- Finish: Sand blasting
- Material: S2 high-alloy steel
- TORX bits are coloured to easily identify by the size of the tip
- -IP: Supplied in a carton display of 8 pcs

ASSORTMENT:

| 59/S54BC | 7314150337613 | 54 | 1 | 50 | 184 | 110 | 806 |
|-------------|---------------|----|---|-----|-----|-----|------|
| 59/S54BC-IP | 7314150337620 | 54 | 1 | 280 | 300 | 190 | 6168 |

SET CONTAINS:

| | | | | |
|--|-------------------------------|----------|-------|---|
| | Slotted | 4.5 | 25mm | 1 |
| | Slotted | 5.5 | 25mm | 1 |
| | Phillips | PH1 | 25mm | 1 |
| | Phillips | PH2 | 25mm | 4 |
| | Phillips | PH3 | 25mm | 1 |
| | Grabber Phillips | PH2G | 25mm | 2 |
| | Pozidriv | PZ1 | 25mm | 1 |
| | Pozidriv | PZ2 | 25mm | 4 |
| | Pozidriv | PZ3 | 25mm | 1 |
| | ● TORX | T10 | 25mm | 2 |
| | ● TORX | T15 | 25mm | 2 |
| | ● TORX | T20 | 25mm | 4 |
| | ● TORX | T25 | 25mm | 2 |
| | ● TORX | T27 | 25mm | 1 |
| | ● TORX | T30 | 25mm | 4 |
| | ● TORX | T40 | 25mm | 1 |
| | ● TORX TAMPER | TR10 | 25mm | 1 |
| | ● TORX TAMPER | TR15 | 25mm | 1 |
| | ● TORX TAMPER | TR20 | 25mm | 1 |
| | ● TORX TAMPER | TR25 | 25mm | 1 |
| | ● TORX TAMPER | TR30 | 25mm | 1 |
| | Hexagonal | HEX3 | 25mm | 1 |
| | Hexagonal | HEX4 | 25mm | 1 |
| | Hexagonal | HEX5 | 25mm | 1 |
| | Hexagonal | HEX6 | 25mm | 1 |
| | Hexagonal | HEX8 | 25mm | 1 |
| | Robertson | R1 | 25mm | 1 |
| | Robertson | R2 | 25mm | 1 |
| | Socket adaptor | 1/4" | 25mm | 1 |
| | Phillips | PH1 | 125mm | 1 |
| | Phillips | PH2 | 125mm | 1 |
| | Pozidriv | PZ1 | 125mm | 1 |
| | Pozidriv | PZ2 | 125mm | 1 |
| | TORX | T20 | 150mm | 1 |
| | TORX | T25 | 150mm | 1 |
| | TORX | T30 | 150mm | 1 |
| | Quick release bit holder" | KM653-QR | 60mm | 1 |
| | Magnetic universal bit holder | KM653 | 60mm | 1 |

59/S100BC

STANDARD SCREWDRIVER BIT SET, BIT HOLDERS AND 1/4" SOCKET ADAPTOR - 100 PCS



FEATURES:

- 100 pcs bit set for Slotted, Phillips, Pozidriv, Hexagon, Robertson and coloured TORX®, TORX® Tamper, head screws
- Drive: 1/4" DIN 3126-C6.3; ISO 1173

- Finish: Sand blasting
- Material: S2 high-alloy steel
- TORX bits are coloured
- -IP: Supplied in a carton display of 8 pcs

ASSORTMENT:

| Part No. | Barcode | QTY | Box | Carton | Carton | Carton | Carton |
|--------------|---------------|-----|-----|--------|--------|--------|--------|
| 59/S100BC | 7314150337637 | 100 | 1 | 184 | 110 | 50 | 857 |
| 59/S100BC-IP | 7314150337644 | 100 | 1 | 280 | 190 | 300 | 6590 |

SET CONTAINS:

| | | | | |
|--|-------------------------------|---------------------|------|----|
| | Slotted | 4.5 | 25mm | 1 |
| | Slotted | 5.5 | 25mm | 1 |
| | Phillips | PH1 | 25mm | 2 |
| | Phillips | PH2 | 25mm | 9 |
| | Phillips | PH3 | 25mm | 1 |
| | Grabber Phillips | PH2G | 25mm | 5 |
| | Pozidriv | PZ1 | 25mm | 2 |
| | Pozidriv | PZ2 | 25mm | 9 |
| | Pozidriv | PZ3 | 25mm | 1 |
| | TORX | T10 | 25mm | 3 |
| | TORX | T15 | 25mm | 5 |
| | TORX | T20 | 25mm | 15 |
| | TORX | T25 | 25mm | 8 |
| | TORX | T27 | 25mm | 1 |
| | TORX | T30 | 25mm | 15 |
| | TORX | T40 | 25mm | 3 |
| | TORX TAMPER | TR10 | 25mm | 1 |
| | TORX TAMPER | TR15 | 25mm | 1 |
| | TORX TAMPER | TR20 | 25mm | 1 |
| | TORX TAMPER | TR25 | 25mm | 1 |
| | TORX TAMPER | TR30 | 25mm | 1 |
| | Hexagonal | HEX3 | 25mm | 1 |
| | Hexagonal | HEX4 | 25mm | 3 |
| | Hexagonal | HEX5 | 25mm | 1 |
| | Hexagonal | HEX6 | 25mm | 3 |
| | Hexagonal | HEX8 | 25mm | 1 |
| | Robertson | R1 | 25mm | 1 |
| | Robertson | R2 | 25mm | 1 |
| | Socket adaptor | socket adaptor 1/4" | 25mm | 1 |
| | Quick release bit holder | KM653-QR | 60mm | 1 |
| | Magnetic universal bit holder | KM653 | 60mm | 1 |

SCREWDRIVER BIT HOLDERS, POWER NUT DRIVERS AND ADAPTORS

50 PRODUCTS

**BAHCO SCREWDRIVER BIT
HOLDERS: FAST AND SAFE**



QUICK-RELEASE CHUCK FOR
FAST CONNECTING AND
CHANGING SCREWDRIVER BITS



LOCK-IN SYSTEM TO
SECURE THE
SCREWDRIVER BIT

PERMANENT MAGNET
FOR QUICK SCREWDRIVER
BIT ATTACHMENT



SCREWDRIVER BIT HOLDERS

KM653-QR

MAGNETIC SCREWDRIVER BIT HOLDER WITH QUICK- RELEASE SYSTEM



FEATURES:

- Drive: DIN 3126-E6.3, ISO1173
- Material: High-performance alloy steel
- For bits according to DIN 3126, ISO 1173, style C 6.3
- With permanent magnet
- KM653-QR, in plastic box of 5 pcs
- KM653-QR-1P, in plastic holder by unit

ASSORTMENT:

| Product Code | Barcode | Box Qty | Unit Qty | Drive | Length | Width | Height | Weight |
|--------------|---------------|---------|----------|-------|--------|-------|--------|--------|
| KM653-QR-1P | 7314151848507 | 1 | 1 | 1/4" | 1/4" | 60 | 14 | 40 |
| KM653-QR | 7314150115983 | 5 | 1 | 1/4" | 1/4" | 60 | 14 | 120 |
| KM753-QR-1P | 7314150204830 | 1 | 1 | 1/4" | 1/4" | 75 | 15 | 30 |

KM100-SH

MAGNETIC SCREWDRIVER BIT & SCREW UNIVERSAL HOLDER 1/4" - 75 MM



FEATURES:

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Black finish
- Material: High-performance alloy steel
- With retaining ring
- With strong magnet to hold the screw
- For bits according to DIN 3126, ISO 1173, style C 6.3
- In plastic holder by unit

ASSORTMENT:

| Product Code | Barcode | Box Qty | Unit Qty | Drive | Length | Width | Height | Weight |
|--------------|---------------|---------|----------|-------|--------|-------|--------|--------|
| KM100-SH | 7314150215690 | 1 | 1 | 1/4" | 1/4" | 75 | 15 | 35 |

KR653**SCREWDRIVER BIT
UNIVERSAL HOLDER WITH
RETAINING RING 1/4" - 60 MM****FEATURES:**

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Black finish
- Material: High-performance alloy steel
- With retaining ring, non-magnetic
- For bits according to DIN 3126, ISO 1173, style C 6.3
- In plastic box: 5 pcs

ASSORTMENT:

| KR653-1P | | 7314150260263 | 1 | 1 | 1/4" | 1/4" | 60 | 34 |
|----------|--|---------------|---|---|------|------|----|-----|
| KR653 | | 7314150204885 | 5 | 1 | 1/4" | 1/4" | 60 | 120 |

MAGNETIC:

| KM653-1P | | 7314151840709 | 1 | 1 | 1/4" | 1/4" | 60 | 10 | 32 |
|----------|--|---------------|---|---|------|------|----|----|-----|
| KM653 | | 7314151786915 | 5 | 1 | 1/4" | 1/4" | 60 | 10 | 120 |

KM653-SF**SCREWDRIVER BIT UNIVERSAL
HOLDER WITH SWIVELLING
FUNCTION 1/4" - 60 MM****FEATURES:**

- Drive: DIN 3126-E6.3, ISO1173
- Material: High-performance alloy steel
- For bits according to DIN 3126, ISO 1173, style C 6.3
- With permanent magnet and with swivel function providing mobility to reach tight spots
- In plastic holder by unit

ASSORTMENT:

| KM653-SF | | 7314150204984 | 1 | 1 | 1/4" | 1/4" | 60 | 14 | 45 |
|----------|--|---------------|---|---|------|------|----|----|----|

KMR653**MAGNETIC SCREWDRIVER BIT UNIVERSAL HOLDER WITH RETAINING RING 1/4" - 60 MM****FEATURES:**

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Black finish
- Material: High-performance alloy steel
- With strong magnet and retaining ring
- For bits according to DIN 3126, ISO 1173, style C 6.3
- KMR653, in plastic box of 5 pcs
- KMR653-1P, in plastic holder

ASSORTMENT:

| KMR653-1P | 7314150204939 | 1 | 1 | 1/4" | 1/4" | 60 | 11 | 35 | |
|-----------|---------------|---|---|------|------|----|----|-----|--|
| KMR653 | 7314150204922 | 5 | 1 | 1/4" | 1/4" | 60 | 11 | 120 | |
| KMR753-1P | 7314150204953 | 1 | 1 | 1/4" | 1/4" | 60 | 11 | 45 | |
| KMR753 | 7314150204946 | 5 | 1 | 1/4" | 1/4" | 60 | 11 | 180 | |

KSR753**STAINLESS STEEL SCREWDRIVER BIT UNIVERSAL HOLDER WITH RETAINING RING 1/4" - 75 MM****FEATURES:**

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Stainless steel
- Material: High-performance stainless steel
- With retaining ring. Non-magnetic
- For bits according to DIN 3126, ISO 1173, style C 6.3
- Application: Non-rusting stainless steel, suitable to use with stainless steel bits
- KSR753, in plastic box of 5 pcs
- KSR753-1P, in plastic holder by unit

ASSORTMENT:

| KSR753-1P | 7314150204908 | 1 | 1 | 1/4" | 1/4" | 75 | 50 | | |
|-----------|---------------|---|---|------|------|----|-----|--|--|
| KSR753 | 7314150204892 | 5 | 1 | 1/4" | 1/4" | 75 | 210 | | |

KM1/4-5/16-1P**MAGNETIC SCREWDRIVER BIT UNIVERSAL HOLDER 1/4" - 70 MM****FEATURES:**

- Drive: 5/16" DIN 3126-E8, ISO 1173
- Finish: Black finish
- Material: High-performance alloy steel
- With strong magnet
- In plastic holder (1 pc)

ASSORTMENT:

| KM1/4-5/16-1P | 7314150275953 | 1 | 1 | 5/16" | 1/4" | 70 | 45 | | |
|---------------|---------------|---|---|-------|------|----|----|--|--|

KCB753**COPPER-BERYLLIUM SCREWDRIVER BIT UNIVERSAL HOLDER WITH RETAINING RING 1/4" - 75 MM****FEATURES:**

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Copper-Beryllium (sleeve)
- Material: High-performance alloy steel
- With retaining ring, non-magnetic
- For bits according to DIN 3126, ISO 1173, style C 6.3
- Application: Suitable for applications that require a very high torque or peak loads
- High wear and corrosion resistance
- In plastic holder by unit

ASSORTMENT:

| KCB753 | 7314150204915 | 1 | 1 | 1/4" | 1/4" | 75 | 50 | | |
|--------|---------------|---|---|------|------|----|----|--|--|

KMR150**MAGNETIC SCREWDRIVER BIT
UNIVERSAL HOLDER 1/4" - 150 MM****FEATURES:**

- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: Black finish
- Material: High-performance alloy steel
- With strong magnet and retaining ring
- For bits according to DIN 3126, ISO 1173, style C 6.3
- KMR150, in plastic box of 5 pcs
- KMR150-1P, in plastic holder by unit

ASSORTMENT:

| KMR150-1P | 7314150204977 | 1 | 1 | 1/4" | 1/4" | 150 | 11 | 70 |
|-----------|---------------|---|---|------|------|-----|----|-----|
| KMR150 | 7314150204960 | 5 | 1 | 1/4" | 1/4" | 150 | 11 | 285 |

POWER NUT DRIVERS**K6750****POWER NUT DRIVER - 50 MM****FEATURES:**

- Drive: 1/4"DIN 3126 E6.3, ISO1173
- Finish: Black finish
- Material: High-performance alloy steel

- Hexagon socket
- In a plastic box containing one nut driver

ASSORTMENT:

| K6750-6 | 7314150204670 | 1 | 1 | 6 | 1/4" | 50 | 11,5 | 25 |
|-----------|---------------|---|---|------|------|----|------|----|
| K6750-7 | 7314150204687 | 1 | 1 | 7 | 1/4" | 50 | 12 | 28 |
| K6750-8 | 7314150204694 | 1 | 1 | 8 | 1/4" | 50 | 12,5 | 36 |
| K6750-10 | 7314150204700 | 1 | 1 | 10 | 1/4" | 50 | 14,5 | 36 |
| K6750-13 | 7314150204823 | 1 | 1 | 13 | 1/4" | 50 | 17 | 40 |
| K6750-1/4 | 7314150204663 | 1 | 1 | 1/4" | 1/4" | 50 | 10,5 | 22 |
| K6750-3/8 | 7314150204656 | 1 | 1 | 1/4" | 3/8" | 50 | 14,4 | 35 |

MAGNETIC:

| KM6750-6 | 7314150204601 | 1 | 1 | 6 | 1/4" | 50 | 11,5 | 25 |
|------------|---------------|---|---|------|------|----|------|----|
| KM6750-7 | 7314150204618 | 1 | 1 | 7 | 1/4" | 50 | 12 | 28 |
| KM6750-8 | 7314150204625 | 1 | 1 | 8 | 1/4" | 50 | 12,5 | 31 |
| KM6750-10 | 7314150204649 | 1 | 1 | 10 | 1/4" | 50 | 14,5 | 36 |
| KM6750-11 | 7314150302628 | 1 | 1 | 11 | 1/4" | 50 | 16 | 38 |
| KM6750-13 | 7314150204632 | 1 | 1 | 13 | 1/4" | 50 | 17 | 40 |
| KM6750-1/4 | 7314150204595 | 1 | 1 | 1/4" | 1/4" | 50 | 10,5 | 22 |
| KM6750-3/8 | 7314150204588 | 1 | 1 | 3/8" | 1/4" | 50 | 14,4 | 35 |

ADAPTORS

K6625

SOCKET ADAPTOR WITH HEX 1/4" FOR SQUARE 1/4" - 25 MM



FEATURES:

- Suitable for DIN 3120, ISO 1174, style A 6.3
- Finish: Black finish
- Material: High-performance alloy steel
- Male hexagon to male square 1/4" DIN 3120-A6,3
- Ball type
- In plastic box of 5 pcs

ASSORTMENT:

| Part No. | Barcode | Box | Unit | Hex | Square | Length | Weight |
|--------------|---------------|-----|------|------|--------|--------|--------|
| K6625-1/4-1P | 7314150260140 | 1 | 1 | 1/4" | 1/4" | 25 | 13 |
| K6625-1/4 | 7314150204496 | 5 | 1 | 1/4" | 1/4" | 25 | 54 |

K6638

SOCKET ADAPTOR WITH HEX 1/4" FOR SQUARE 3/8" - 38 MM



FEATURES:

- Suitable for DIN 3120, ISO 1174, style A 10
- Finish: Black finish
- Material: High-performance alloy steel
- Hexagon male to square male 3/8" DIN 3120-A10
- Ball type
- In plastic box of 5 pcs

ASSORTMENT:

| Part No. | Barcode | Box | Unit | Hex | Square | Length | Weight |
|--------------|---------------|-----|------|------|--------|--------|--------|
| K6638-3/8-1P | 7314150260164 | 1 | 1 | 3/8" | 1/4" | 38 | 31 |
| K6638-3/8 | 7314150204557 | 5 | 1 | 3/8" | 1/4" | 38 | 129 |

K6650

SOCKET ADAPTOR WITH HEX 1/4" FOR SQUARE 1/4" OR 3/8" - 50 MM



FEATURES:

- Suitable for DIN 3120, ISO 1174, style F 6.3, F 10, F 12,7
- Length adaptor: 50mm
- Finish: Black finish
- Material: High-performance alloy steel
- Hexagon male to square male DIN 3120
- Pin type (except K6650-1/4-1P ball type)
- In plastic box of 5 pcs (except K6650-1/4-1P packed by unit)

ASSORTMENT:

| Part No. | Barcode | Box | Unit | Hex | Square | Length | Weight |
|--------------|---------------|-----|------|------|--------|--------|--------|
| K6650-1/4-1P | 7314150204533 | 1 | 1 | 1/4" | 1/4" | 50 | 25 |
| K6650-1/4 | 7314150204526 | 5 | 1 | 1/4" | 1/4" | 50 | 90 |
| K6650-3/8-1P | 7314150260225 | 1 | 1 | 3/8" | 1/4" | 50 | 30 |
| K6650-3/8 | 7314150204502 | 5 | 1 | 3/8" | 1/4" | 50 | 135 |
| K6650-1/2-1P | 7314150260188 | 1 | 1 | 1/2" | 1/4" | 50 | 42 |
| K6650-1/2 | 7314150204519 | 5 | 1 | 1/2" | 1/4" | 50 | 180 |

K66100

SOCKET ADAPTOR WITH HEX 1/4" FOR SQUARE 1/4" OR 3/8" - 100 MM



FEATURES:

- Suitable for DIN 3120, ISO 1174, style F 6.3 and F 10
- Finish: Black finish
- Material: High performance alloy steel
- Hexagon male to square male DIN 3120
- K66100-1/4: Pin type
- K66100-3/8: Ball type
- In plastic box of 5 pcs

ASSORTMENT:

| Part No. | Barcode | Box | Unit | Hex | Square | Length | Weight |
|---------------|---------------|-----|------|------|--------|--------|--------|
| K66100-1/4-1P | 7314150260201 | 1 | 1 | 1/4" | 1/4" | 100 | 46 |
| K66100-1/4 | 7314150204540 | 5 | 1 | 1/4" | 1/4" | 100 | 190 |
| K66100-3/8-1P | 7314150260249 | 1 | 1 | 3/8" | 1/4" | 100 | 58 |
| K66100-3/8 | 7314150204564 | 5 | 1 | 3/8" | 1/4" | 100 | 190 |

K6660-QR

SOCKET ADAPTOR WITH HEX 1/4" FOR SQUARE 1/4" - 60 MM



FEATURES:

- Suitable for DIN 3120, ISO 1174
- Finish: Black finish
- Material: High-performance alloy steel
- With quick-release system for easy locking
- Hexagon male to square male DIN 3120
- Ball type
- In plastic holder by unit

ASSORTMENT:

| | | | | | | | |
|-------------|---------------|---|---|------|------|----|----|
| | | | | | | | |
| K6660-QR-1P | 7314150204571 | 1 | 1 | 1/4" | 1/4" | 60 | 30 |

54640

BIT ADAPTOR WITH HEX 1/4" FOR SQUARE 5/16" - 40 MM



FEATURES:

- Spare part for impact screwdrivers, ref. 5521
- 1/2" square drive
- For 5/16" bits
- Bit-retaining ring

ASSORTMENT:

| | | | | | | | |
|-------|---------------|---|---|-------|------|----|----|
| | | | | | | | |
| 54640 | 7314150215720 | 1 | 1 | 5/16" | 1/2" | 40 | 54 |



FULL SERVICE

POWER

Bahco adds even more power to the range of quality products by providing full knowledge sharing. This ensures that you always find the right accessory. Because using them for the right type of application truly puts the POWER into these Power Tool Accessories.

Full service is shaped through:

THE BAHCO ACADEMY

To expand and maintain the extensive knowledge and experience with the Power Tool Accessories programme, we have our own academy with training centres across Europe. In our training centres in the UK, Sweden, Italy, Poland, Belarus and Turkey, colleagues, customers and end users share the product specifications, techniques, problem-solving and how to get the maximum out of every tool.

FULL IN-STORE SUPPORT

Thanks to our new in-store communication programme, you will quickly find the right product in your local shop.



ICON OVERVIEW

HOLESAWS



**PRODUCT
CODE**



**EAN
CODE**



**PACK
QUANTITY**



**BOX
QUANTITY**



**HOLESAW
LENGTH**



**HOLESAW
DIAMETER**



**SMALL
ARBOR**



**BIG
ARBOR**



**TYPE OF
PILOT DRILL**



**SHANK
WIDTH**



**CHUCK
WIDTH**

A B

**SIZE
A, B, ... (MM)**



ADD-ON



WEIGHT

SABRE SAW BLADES



**PRODUCT
CODE**



**EAN
CODE**



**PACK
QUANTITY**



**BOX
QUANTITY**



**SAW BLADE
LENGTH**




**SAW BLADE
WIDTH**



**TPI:
TEETH PER INCH**



**TYPE OF
SAW BLADE**



**SAW BLADES
IN SET**



WEIGHT

JIGSAW BLADES



**PRODUCT
CODE**



**EAN
CODE**



**PACK
QUANTITY**



**BOX
QUANTITY**



**TYPE OF
TOOTHING**



MATERIAL



**TPI:
TEETH PER INCH**

A B

**SIZE
A, B, ... (MM)**



WEIGHT

CIRCULAR SAW BLADES



PRODUCT
CODE



EAN
CODE



PACK
QUANTITY



BOX
QUANTITY

A B

SIZE
A, B, ... (MM)



WEIGHT

PORTABLE BAND SAW BLADES



PRODUCT
CODE



EAN
CODE



PACK
QUANTITY



BOX
QUANTITY



SAW BLADE
HEIGHT



SAW BLADE
WIDTH



TPI:
TEETH PER INCH



TYPE OF
SAW BLADE



LOOP
LENGTH



WEIGHT

ROTARY BURRS



PRODUCT
CODE



EAN
CODE



PACK
QUANTITY



BOX
QUANTITY



TYPE OF
TOOTHING



NUMBER
OF TEETH



STOCK

A B

SIZE
A, B, ... (MM)



WEIGHT

DRILL BITS



PRODUCT
CODE




EAN
CODE



PACK
QUANTITY



BOX
QUANTITY



PIECES
PER SET

A B

SIZE
A, B, ... (MM)



WEIGHT

SCREWDRIVER BITS



PRODUCT
CODE



EAN
CODE



PACK
QUANTITY



BOX
QUANTITY



TYPE
OF HEAD



TIP
THICKNESS



TIP
WIDTH



SCREWDRIVER
BIT LENGTH



BOX LENGTH



BOX
WIDTH



BOX
HEIGHT



SCREWDRIVER
BIT DIAMETER



WEIGHT



BAHCO

www.bahco.com

PTA-ENG-19



7 314 150 428076